


Notes

1. Custom cable assembled with silver plated copper Kapton insulated 14 AWG stranded wire, female PEEK 3 pin power D-type connector, PEEK backshell (A+ procedure/customer supplied tubes and bands) & PEEK braid along with customer supplied copper shield & contacts.

Rev.	Description	Date	Made By	Approval
A	Initial Release	5/27/2020	Farrell	

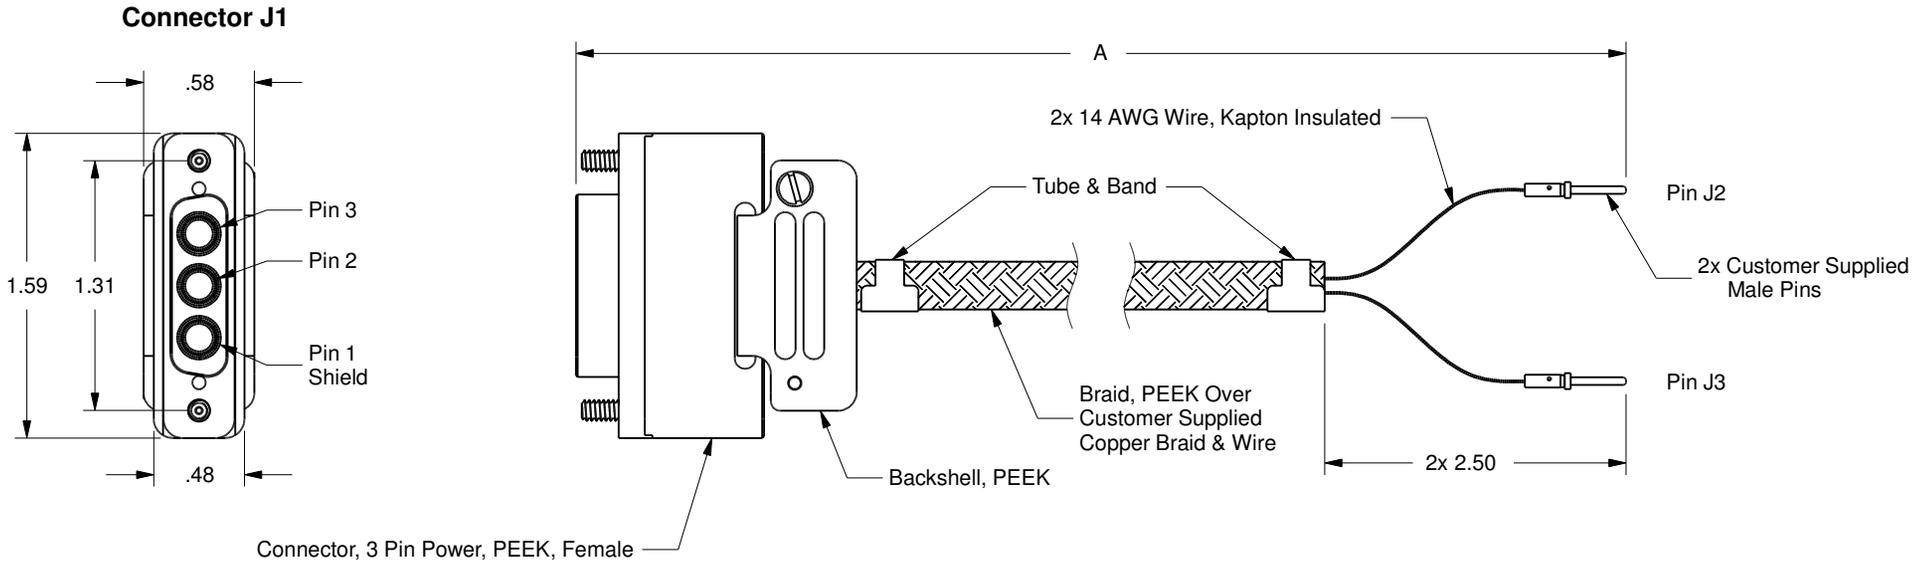

Connector J1	Male Pins
Pin 1	Shield
Pin 2	Pin J2
Pin 3	Pin J3

Part Number	Customer/ Model Number	Dimension A
6-105339	D1000218	25" long
6-105340	D1000918	70" long
6-105341	D1000919	95" long
6-105342	D1000920	135" long

UNCONTROLLED WEB DRAWING

Proprietary and Confidential
 The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

Material See Individual Components	
Tolerances, unless otherwise specified	
.X ± .030	Angles ± 0.5°
.XX ± .010	Finish 63Ra
.XXX ± .005	

Title CustSup-3P-TYP14-xxSCBS-PB			
Drawn by Date	Farrell 5/27/2020	No. See Chart	Rev. A
Approved			Sheet



Accu-Glass Products Inc.
 25047 Anza Drive
 Valencia, CA 91355
 T 818-365-4215
 F 818-365-7074
 www.accuglassproducts.com

A

B

C

D