



-1 28X55 LID MAT'L: 6061-T6 ALUMINUM; 1 REQ'D.

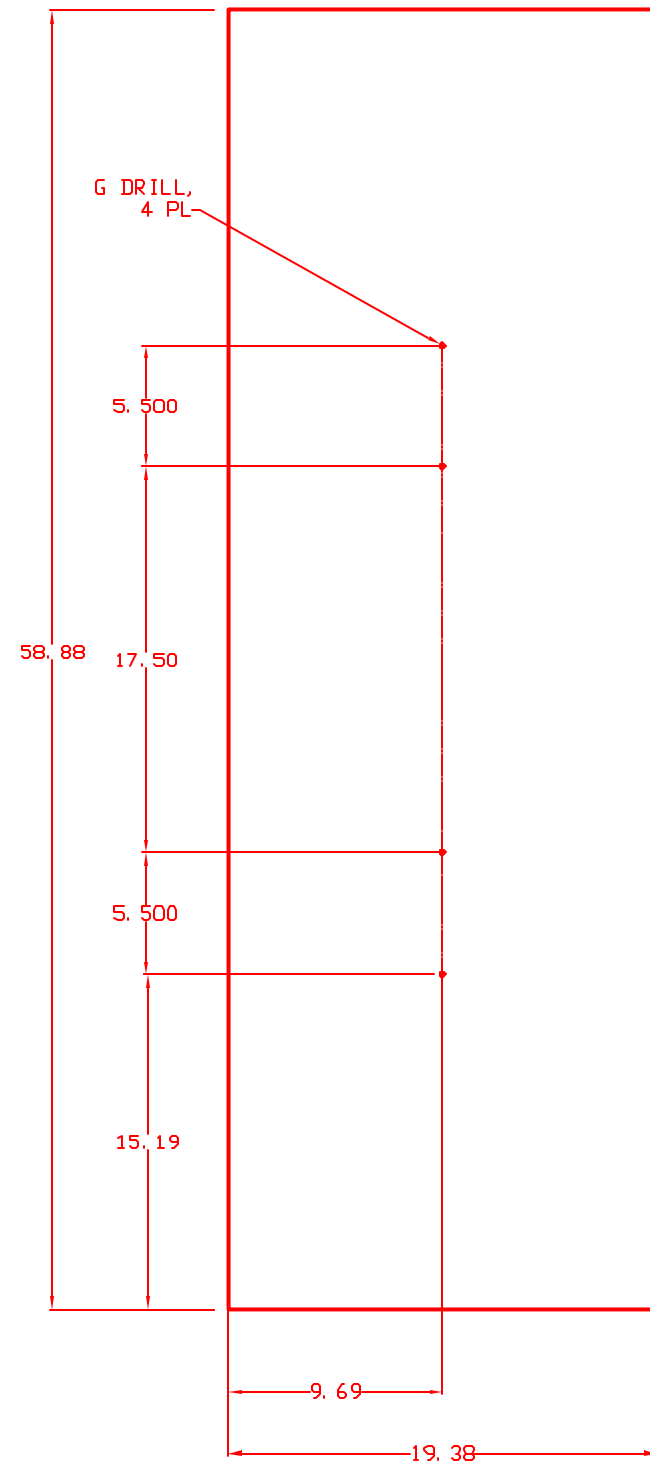

-2 20X59 LID MAT'L: 6061-T6 ALUMINUM; 5 REQ'D.

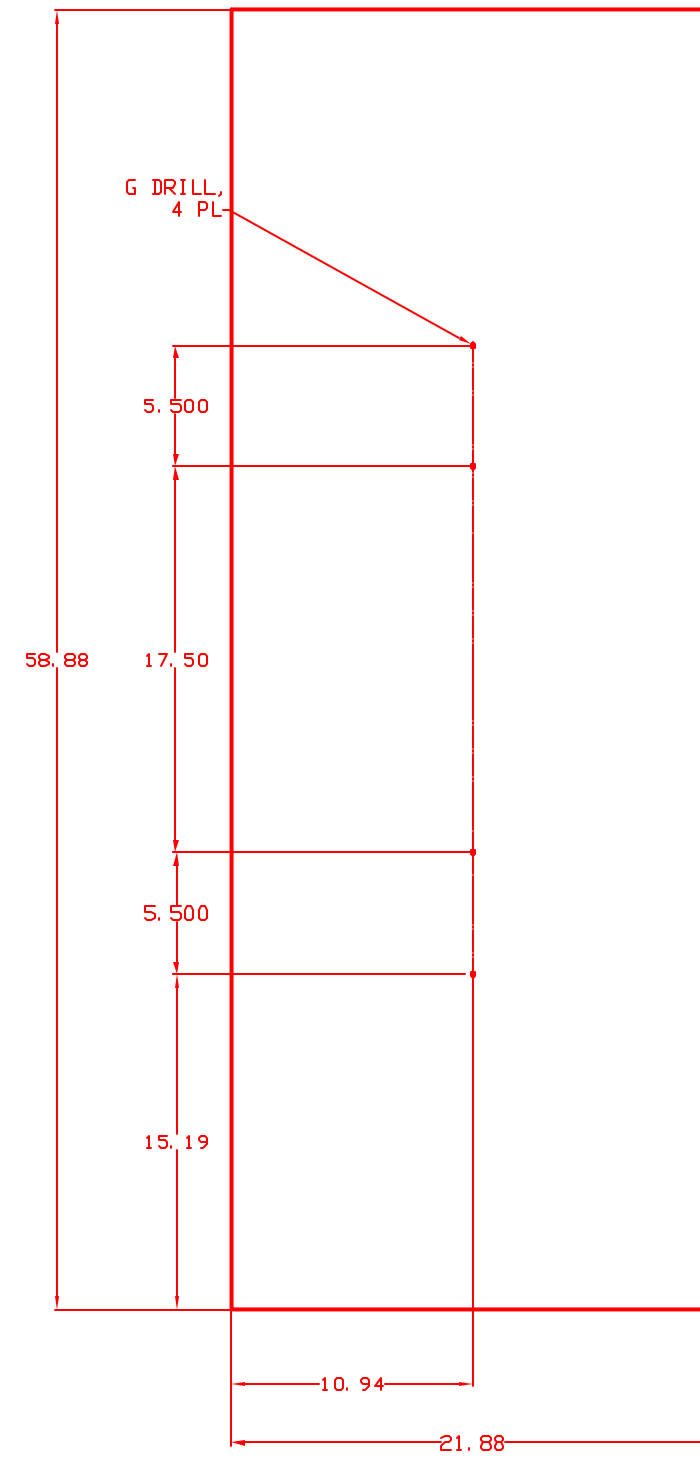

-3 22X59 LID MAT'L: 6061-T6 ALUMINUM; 2 REQ'D.

MATERIAL THICKNESS, ALL LIDS: 10 GA

- NOTES:
 1. REMOVE ALL SHARP EDGES.
 2. ETCH FOR MATTE FINISH.
 3. HARD ANODIZE DYE BLACK.
 4. TAKE CARE TO PRESERVE FLATNESS DURING FABRICATION AND SHIPPING.

ALL DIMENSIONS ARE IN INCHES
 TOLERANCES: X, XXX: +/- 0.005"
 X, XX: +/- 0.03"
 X, X: +/- 0.1"

D020093-02-R
 LIDS #2, TABLE COVER
 40M LAB LIGO PROJECT
 L JONES 6/20/02