


REV.	DATE	DCN #	DRAWING TREE #
A	FEB 17th 2006	E060057-00	E060059-A

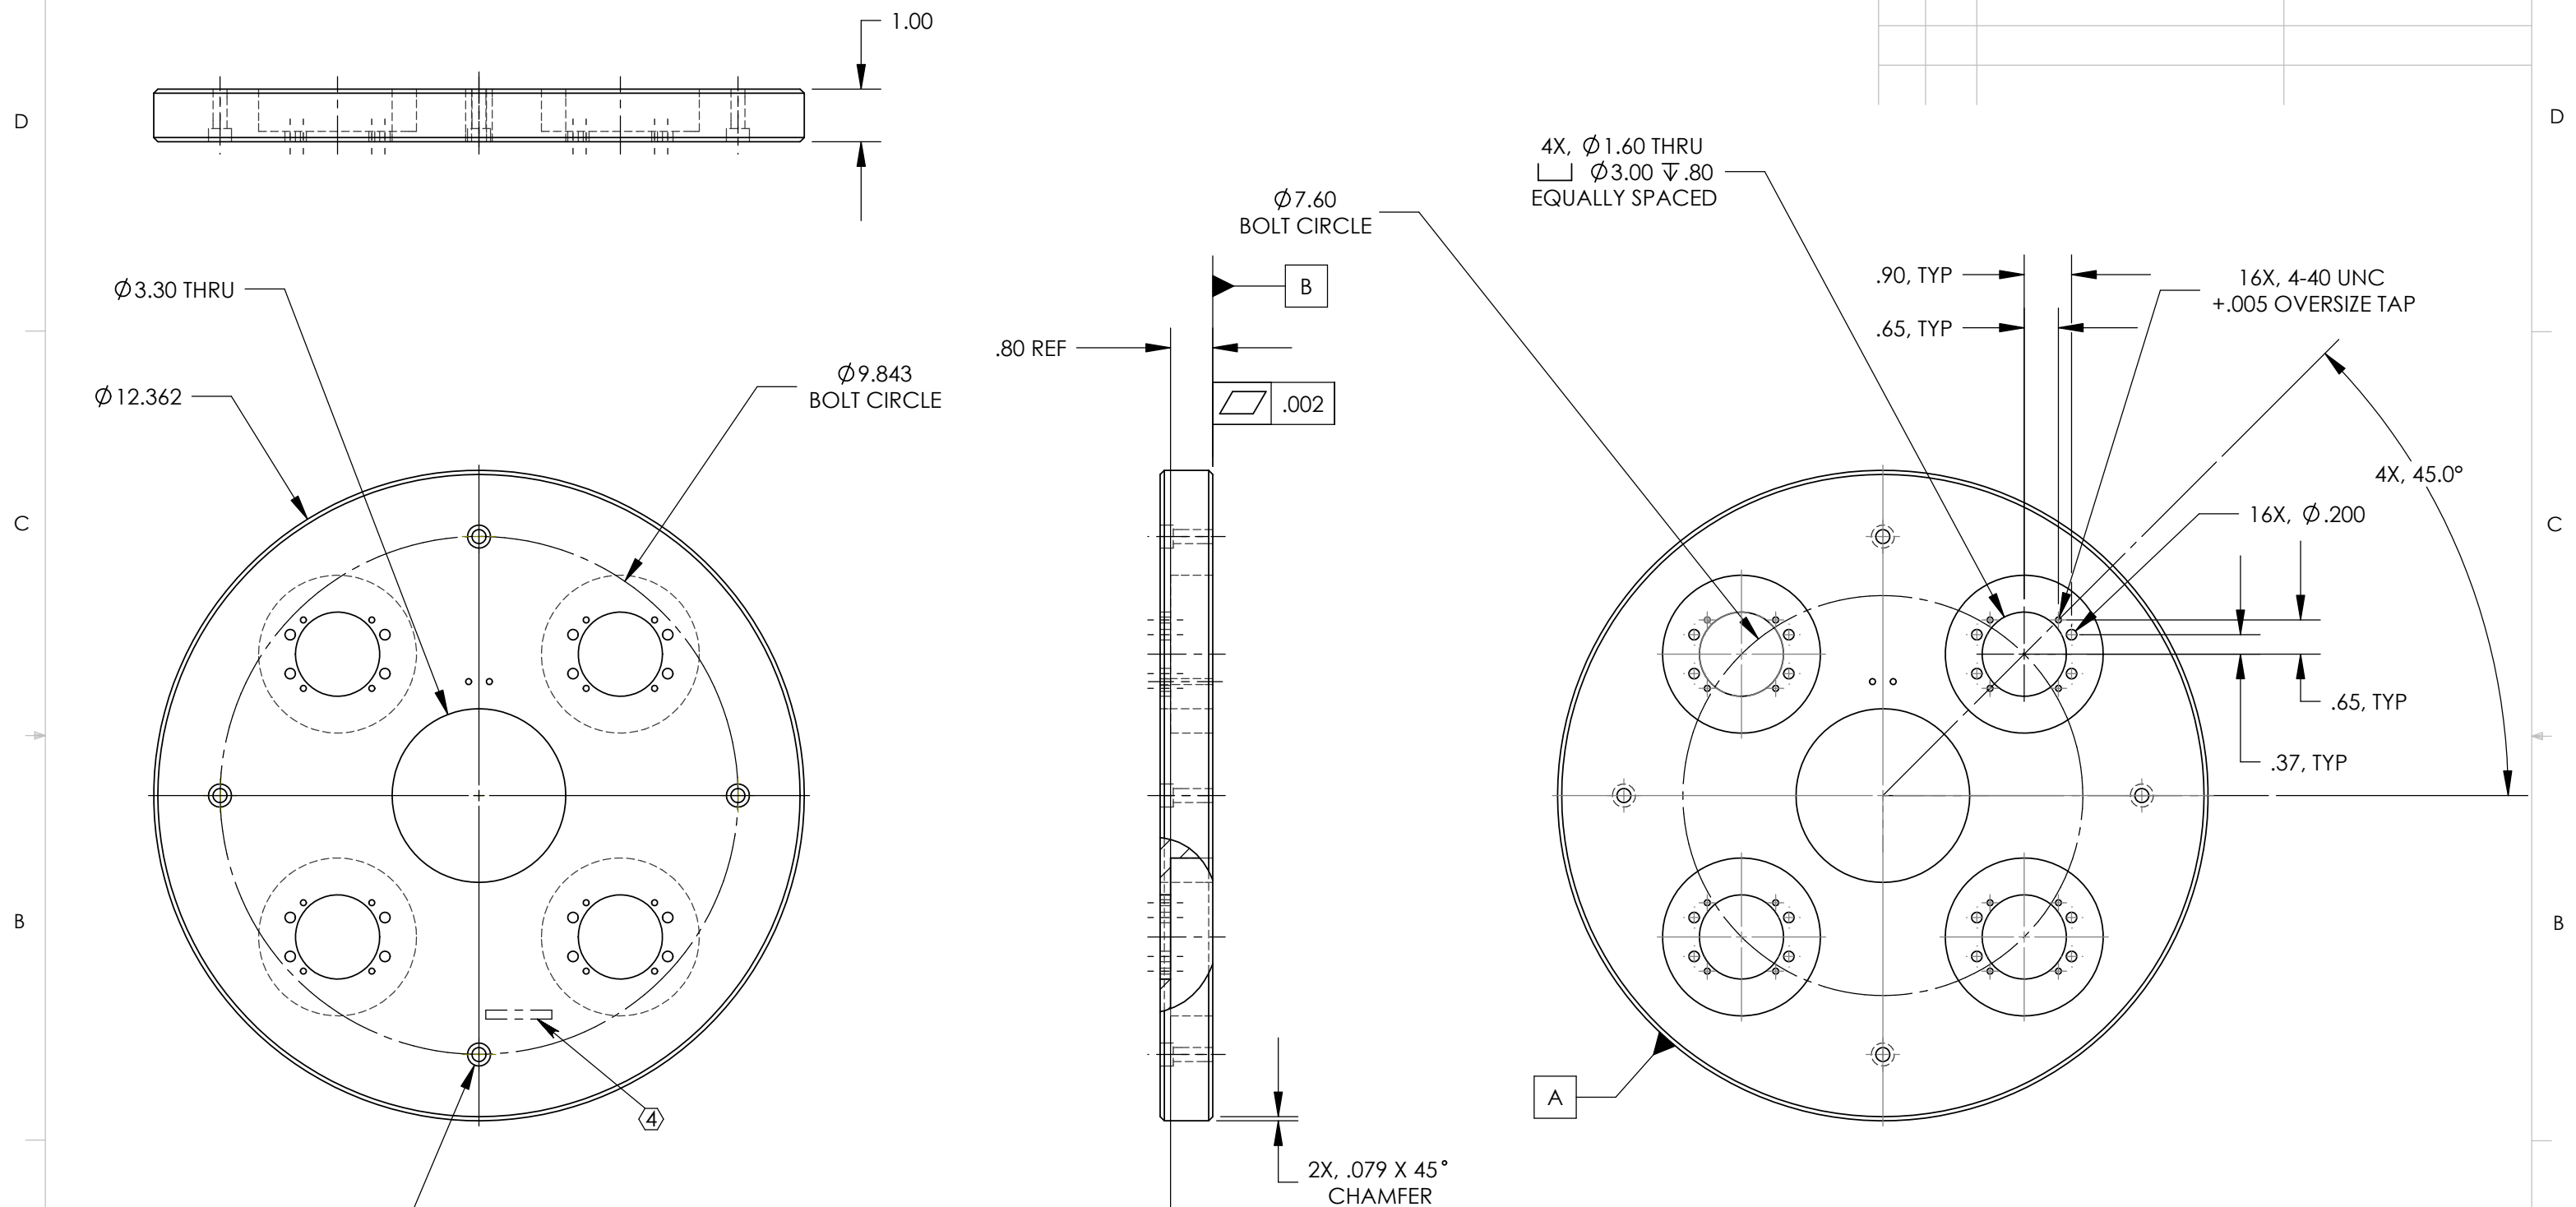

\square	.002	
\parallel	.002	B
\perp	.002	A

NOTES: (UNLESS OTHERWISE SPECIFIED)

- DO NOT SCALE FROM DRAWING.
- REMOVE ALL SHARP EDGES, R.02 MIN.
- ALL MACHINING FLUIDS SHALL BE WATER SOLUBLE AND FREE OF SULFUR, CHLORINE AND SILICONE, SUCH AS CINCINNATI MILACRON'S CIMTECH 410 (STAINLESS STEEL)
- SCRIBE, ENGRAVE OR STAMP DRAWING PART NUMBER ON NOTED SURFACE OF PART AND A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST PART AND PROCEED CONSECUTIVELY. USE .07" HIGH CHARACTERS. EXAMPLE: D020188- 001. A VIBRATORY TOOL MAY BE USED.

DIMENSIONS ARE IN INCHES

TOLERANCES:
 .XX ± 0.01
 .XXX ± 0.005

ANGULAR ± 0.5°

MATERIAL
 6061-T6-Al

FINISH
 32 μ inch

NAME	DATE
CIT	28 JAN 2004
J Romer M.P. Lloyd	Oct 2004

DRAWN CIT 28 JAN 2004
CHECKED J Romer M.P. Lloyd Oct 2004
APPROVED

PARTS LIST

SYSTEM ADVANCED LIGO SUS
SUB-SYSTEM SUS
NEXT ASSY ETM CONT TEST MASS

PART NAME
 PEN REACTION MASS REMOVABLE FACE PLATE

SIZE DWG. NO. B D040145
REV. A

SCALE: NTS PROJECTION: SHEET 1 OF 1