


### WALL TYPE SCHEDULE


### WALL TYPES LEGEND

WALL KEY	DETAIL PLAN	DESCRIPTION	WALL KEY	DETAIL PLAN	DESCRIPTION	WALL KEY	DETAIL PLAN	DESCRIPTION
18		EXTERIOR INSULATED METAL WALL PANELS (VERTICAL)	11		6" METAL STUDS 5/8" GYPSUM BOARD	4		4" METAL STUD 5/8" GYPSUM BOARD
19		7/8" TEXTURE PLASTER OVER METAL LATH 1/2" PLYWOOD 8" METAL STUDS 1/2" PLYWOOD 7/8" TEXTURE PLASTER OVER METAL LATH	12		6" METAL STUDS 1/4" CERAMIC TILE 1" GROUT/BACKER BOARD 1/4" CERAMIC TILE	5		1 WIRE WHERE INSULATION OCCURS 4" METAL STUDS 1" GROUT/BACKER BOARD 1/4" CERAMIC TILE
20			13		5/8" GYPSUM BOARD 6" METAL STUDS 1" GROUT/BACKER BOARD 1/4" CERAMIC TILE	6		5/8" GYPSUM BOARD 4" METAL STUD 5/8" GYPSUM BOARD
21			14		1/4" CERAMIC TILE 1" GROUT/BACKER BOARD 6" METAL STUDS 1" GROUT/BACKER BOARD 1/4" CERAMIC TILE	7		5/8" GYPSUM BOARD 4" METAL STUD 1" GROUT/BACKER BOARD 1/4" CERAMIC TILE
22			15		6" METAL STUDS 5/8" GYPSUM BOARD 5/8" GYPSUM BOARD	8		4" METAL STUD 5/8" GYPSUM BOARD 5/8" GYPSUM BOARD
23			16		5/8" GYPSUM BOARD 6" METAL STUDS 5/8" GYPSUM BOARD	9		5/8" GYPSUM BOARD 5/8" GYPSUM BOARD 4" METAL STUD 5/8" GYPSUM BOARD 5/8" GYPSUM BOARD
24			17		5/8" GYPSUM BOARD 5/8" GYPSUM BOARD 6" METAL STUDS 5/8" GYPSUM BOARD 5/8" GYPSUM BOARD	10		5/8" GYPSUM BOARD 5/8" GYPSUM BOARD 4" METAL STUD 5/8" GYPSUM BOARD 1" GROUT/BACKER BOARD 1/4" CERAMIC TILE

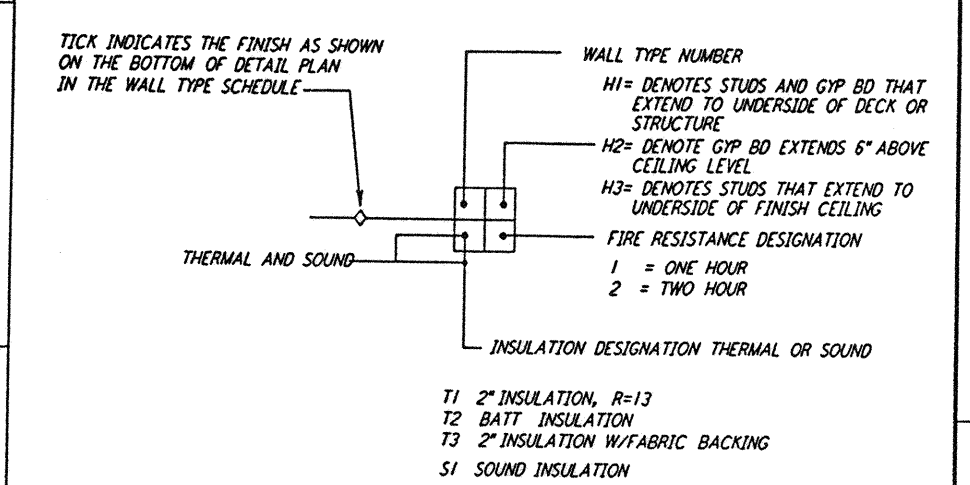

**NOTE:**  
 INDICATED INSULATION VALUES FOR THERMAL AND SOUND ARE THE MINIMUM REQUIRED VALUES

### EXAMPLE

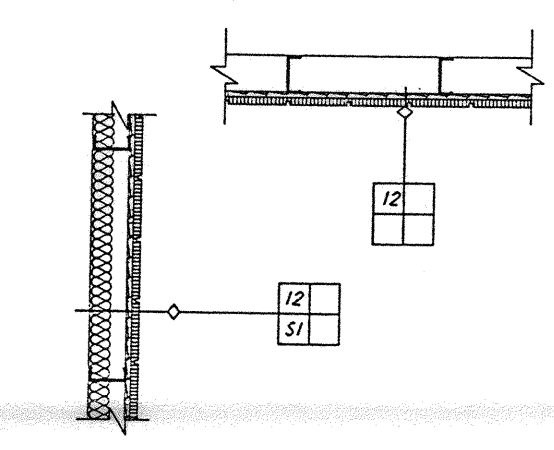

WALL KEY	DETAIL PLAN	DESCRIPTION
1		2 1/2" METAL STUD 5/8" GYPSUM BOARD
2		5/8" GYPSUM BOARD 2 1/2" METAL STUD 5/8" GYPSUM BOARD
3		1 WIRE WHERE INSULATION OCCURS 2 1/2" METAL STUDS 1" GROUT/BACKER BOARD 1/4" CERAMIC TILE

This document and the design it covers are the property of PARSONS. They are loaned only with the borrower's expressed written agreement that they will not be reproduced, copied, loaned, exhibited, or used in any other way, except by written consent from PARSONS to the borrower.

REVISED	NO.	DATE	BY	CHKD	ENGR	PROJ	DESCRIPTION
B	4-19-96	SF	SF	TDM			FINAL DESIGN REVIEW & BID
A	01/17/96	SF	SF	TDM			PRELIMINARY DESIGN REVIEW

DRAWN	CKT
CHECKED	
ENGINEER	
PROJ	

**PARSONS**  
 100 WEST WALNUT STREET  
 PASADENA, CALIFORNIA

**LIGO**  
 CALIFORNIA INSTITUTE OF TECHNOLOGY  
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY

LASER INTERFEROMETER  
 GRAVITATIONAL-WAVE OBSERVATORY  
 SITE NO. 1 - HANFORD, WASHINGTON

ARCHITECTURAL WALL TYPE SCHEDULES

PROJECT NUMBER: PPI50969 8094  
 SHEET NUMBER: WA-A-428