





REV.	DATE	DCN #	DRAWING TREE #
A	18/OCT/06	E060247	

SECTION B-B

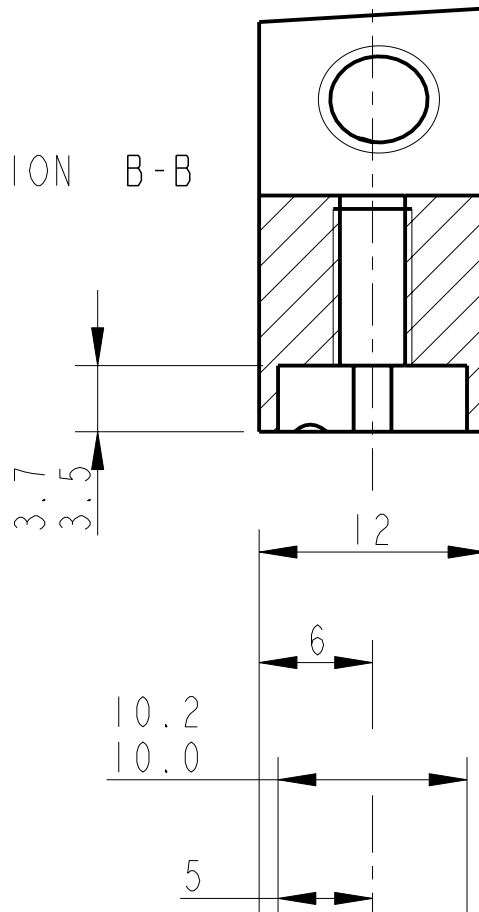


2-HOLES FOR 8-32 UNC X 1.5 D 1g HELICOILS. HELICOILS NOT TO BE FITTED.

$\text{H} \text{ } \phi \text{ } 0.2$

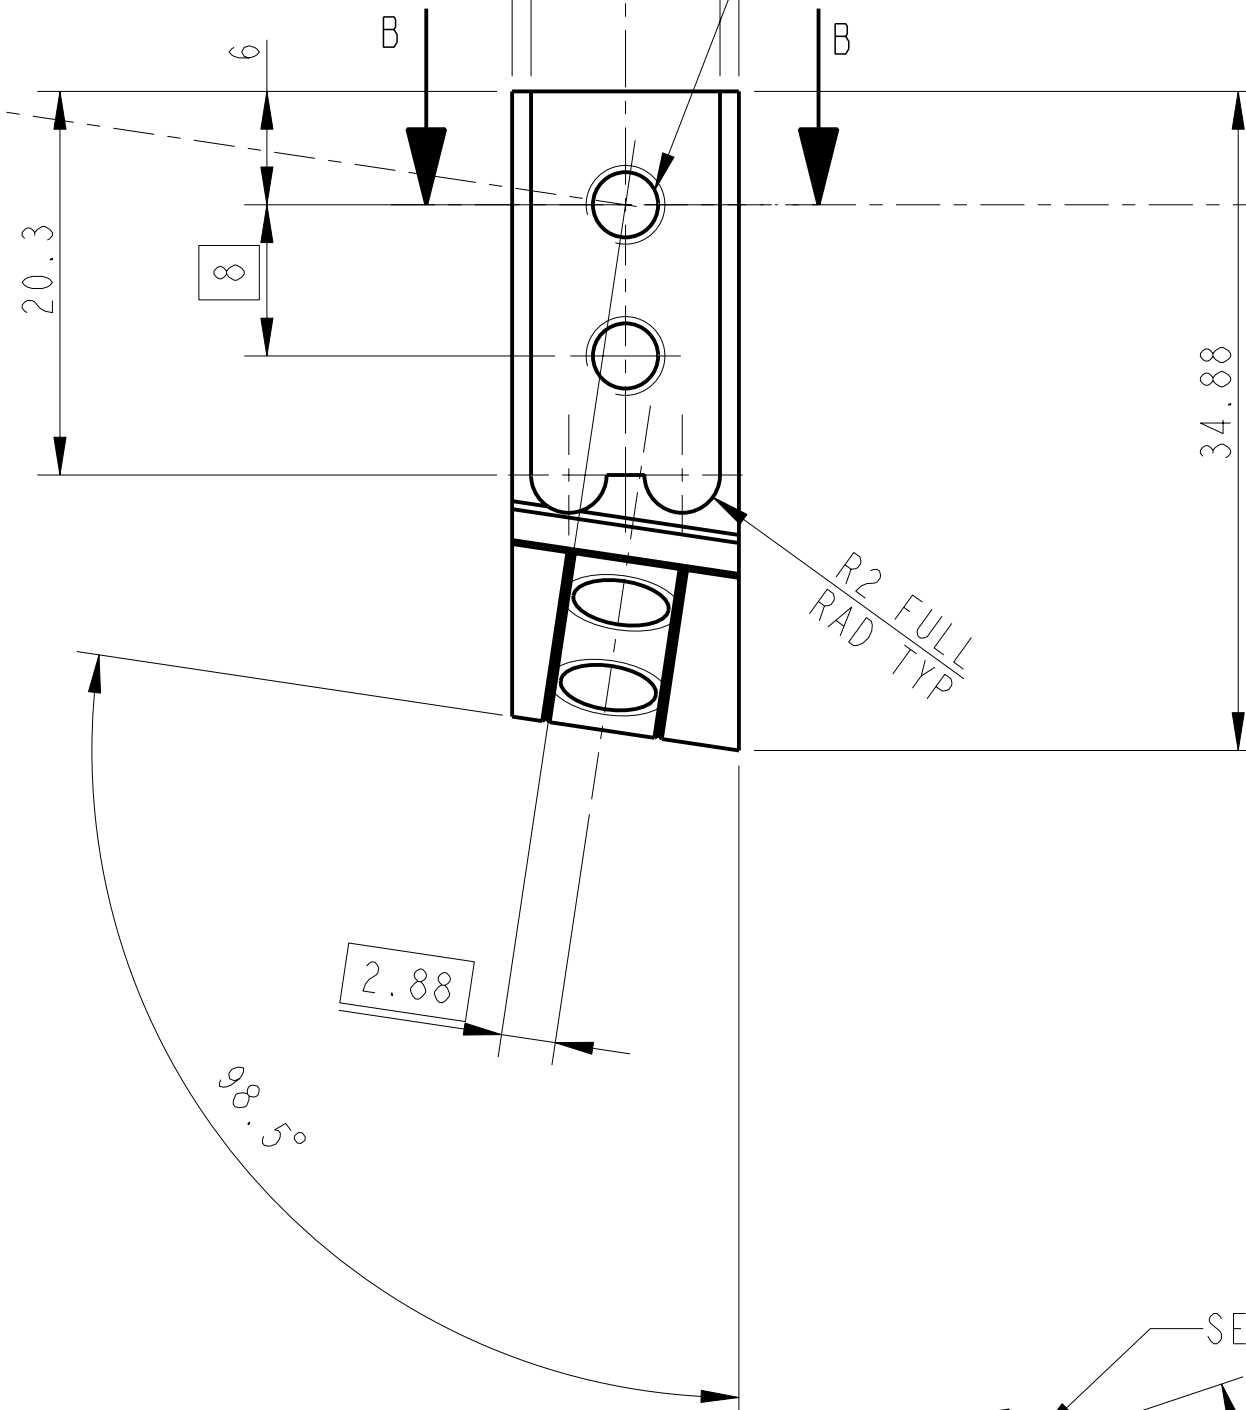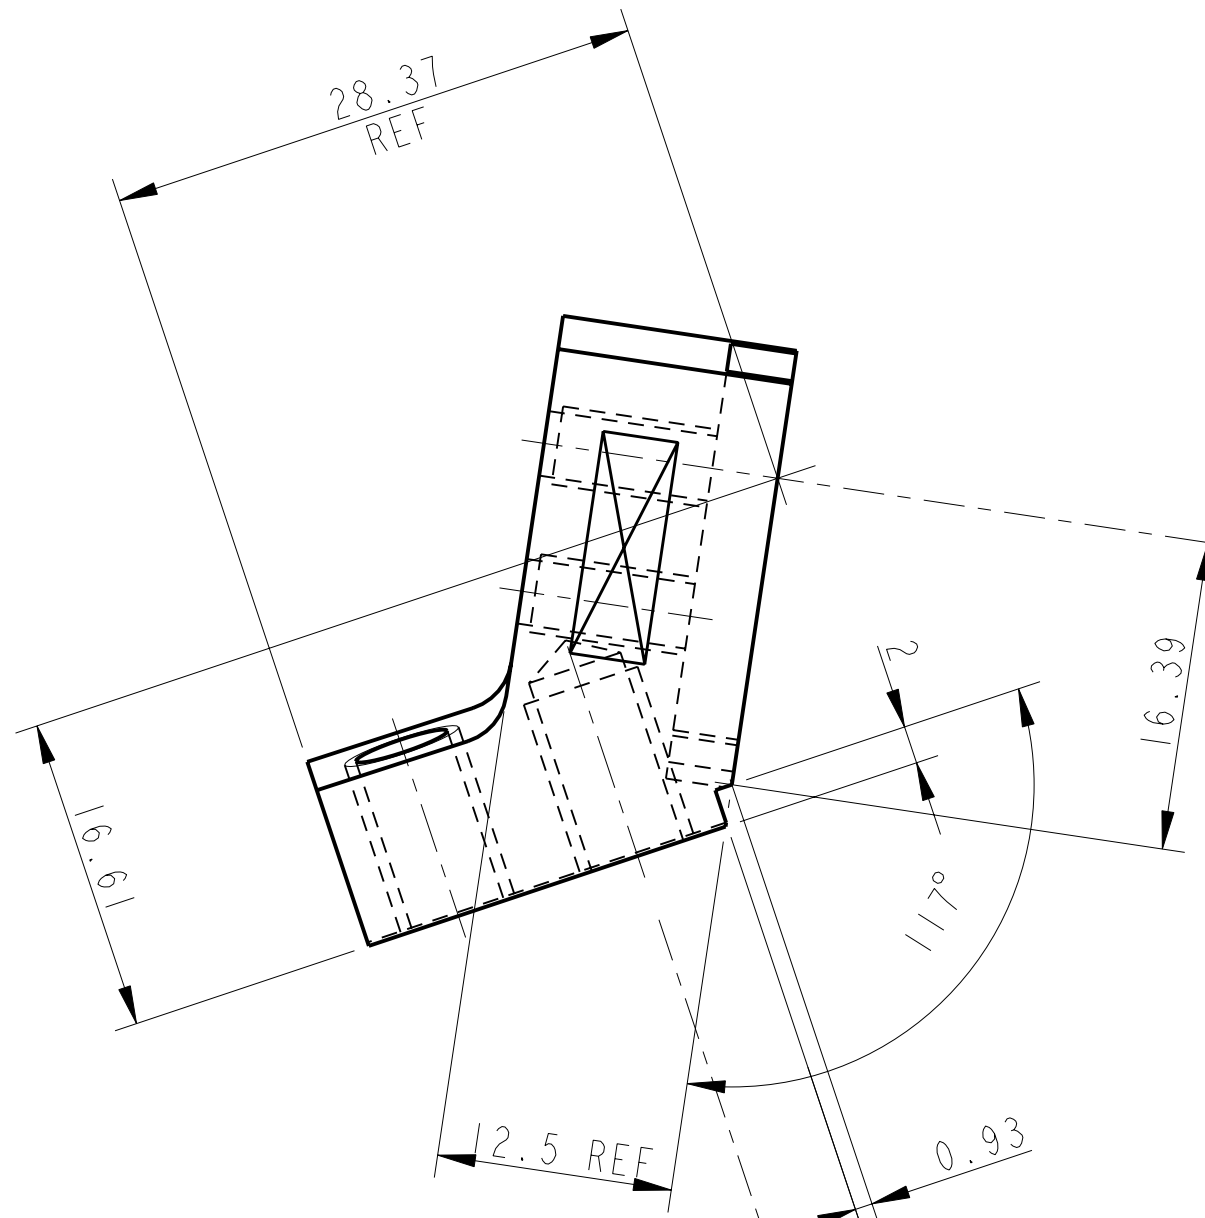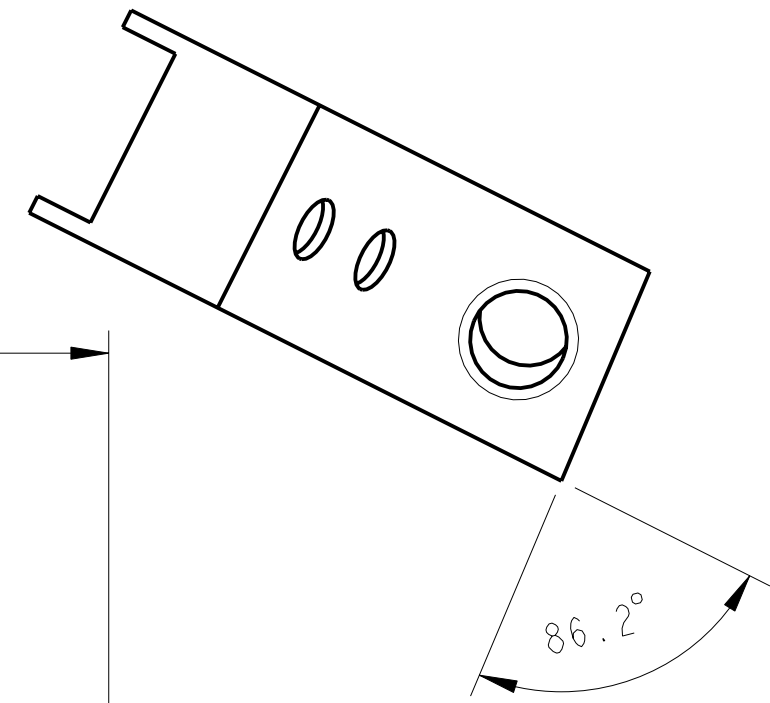


PART NO. (SEE NOTE 4) NUMBER TO BE ETCHED OR STAMPED ON IN APPROX POSITION SHOWN.

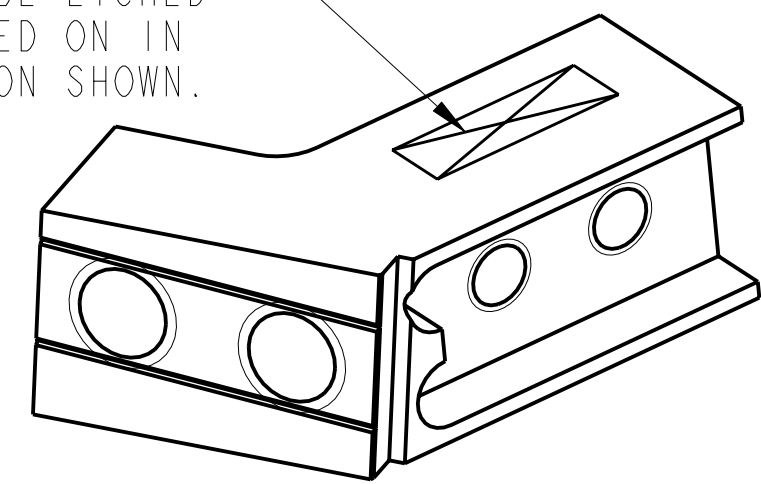

2-HOLES DRILL FOR 1/4-20 UNC X 1.5 D 1g HELICOILS. HELICOILS NOT TO BE FITTED.


$\text{H} \text{ } \phi \text{ } 0.2$

DETAIL SCALE 20:1

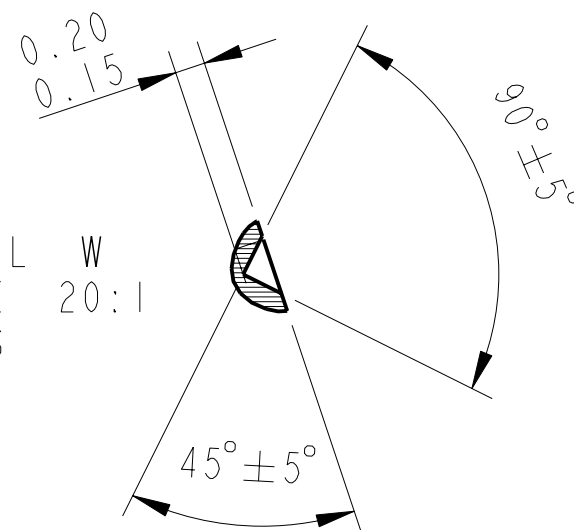

SEE DETAIL W

SECTION D-D SCALE 10:1

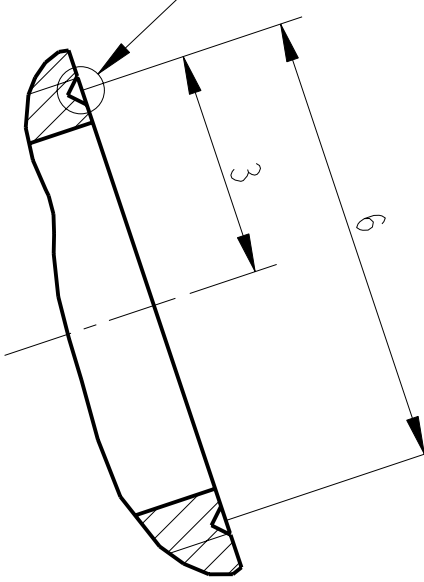

NOTES: (UNLESS OTHERWISE SPECIFIED)		CALIFORNIA INSTITUTE OF TECHNOLOGY	
1. REMOVE ALL SHARP EDGES, R. 02 MIN.		GLASSGOW UNIVERSITY OF TECHNOLOGY	
2. DO NOT SCALE FROM DRAWING.		RUTHERFORD APPLETON LABORATORIES	
3. ALL MACHINING FLUIDS SHALL BE WATER SOLUBLE AND FREE OF SULFUR, CHLORINE AND SILICONE, SUCH AS CINCINNATI MILACRON'S CIMTECH 410 (STAINLESS STEEL).		SYSTEM ADVANCED LIGO	
4. SCRIBE, ENGRAVE OR STAMP DRAWING PART NUMBER ON NOTED SURFACE OF PART AND A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST PART AND PROCEED CONSECUTIVELY. USE .07" HIGH CHARACTERS. EXAMPLE: D020188-001. A VIBRATORY TOOL MAY BE USED.		SUB-SYSTEM SUS	
		NEXT ASSY QUAD N-PTYPE TOP MASS	
		PART NAME WIRE CLAMP BODY (TOP MASS WIRE CLAMP)	
		DRG. NO. D060395	
		SCALE 5:2 PROJECTION 1 OF 1	