6 5

1. INTERPRET DRAWING PER ASME Y14.5-1994.

2. REMOVE ALL SHARP EDGES 0.005" to 0.015".

H 3. DO NOT SCALE FROM DRAWING.

G


4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE. REFER TO LIGO E0900237 FOR LIST OF APPROVED COOLANTS.

(5) SCRIBE, ENGRAVE (A VIBRATORY TOOL MAY BE USED), LASER MARK OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER, REVISION (AND VARIANT OR "TYPE" IF APPLICABLE) ON NOTED SURFACE OF PART FOLLOWED ON THE NEXT LINE WITH A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE MINIMUM 0.12" HIGH CHARACTERS, UNLESS THE SIZE OF THE PART DICTATES SMALLER CHARACTERS. EXAMPLE: DXXXXXX-VY, TYPE-XX, S/N XXX


6. MACHINE ALL SURFACES TO REMOVE OXIDES AND MILL FINISH, USE OF ABRASIVE REMOVAL TECHNIQUES IS NOT ALLOWED. REFER TO LIGO-E0900364

7. ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH LIGO SPECIFICATION E0900364.

8. ALL MATERIAL IS TO BE VIRGIN MATERIAL (i.e. NO WELD REPAIRS, PLUGS OR RECYCLED MATERIAL). NO REPAIRS SHALL BE MADE UNLESS APPROVED IN ADVANCE, AND IN WRITING, BY LIGO LABORATORY. REFER TO LIGO-E0900364.

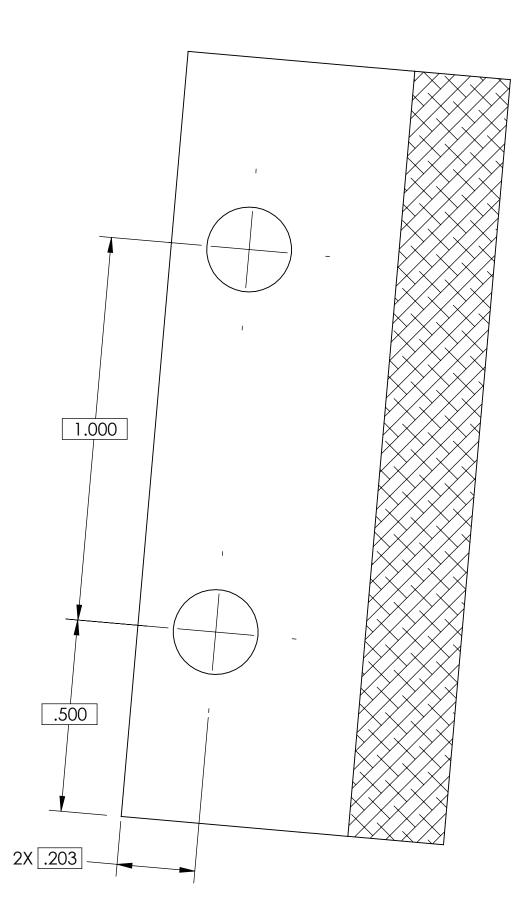

SECTION B-B SCALE 4 : 1

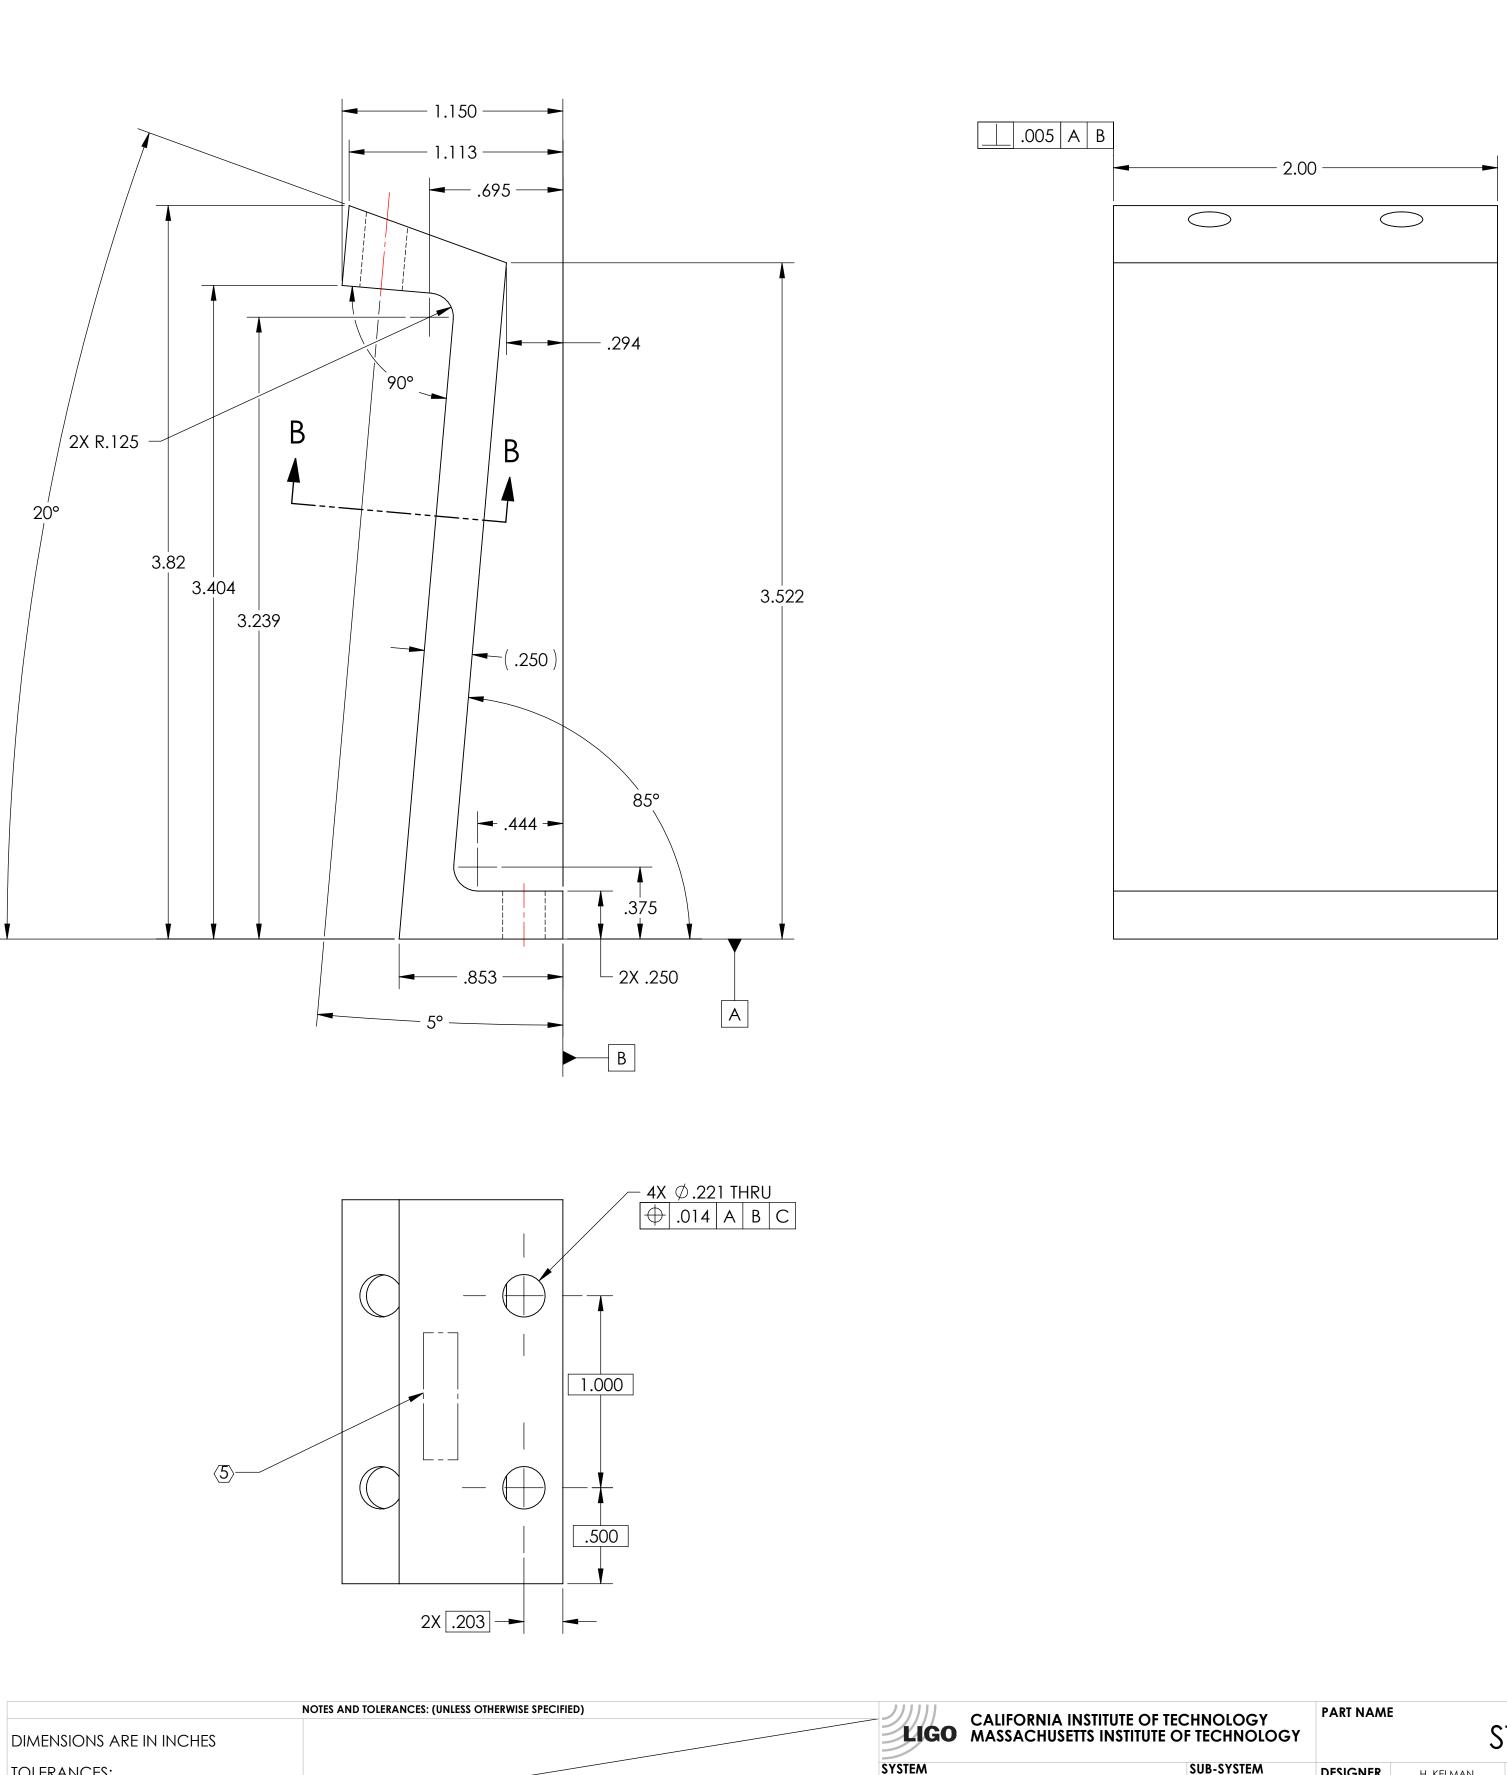

¥ 4

TOLE	rances	•
.XX		
.XXX	± .005	

6

MATERIAL

6061-T6 AI

ANGULAR ± 0.5°

63 µinch

FINISH

4


NEXT ASSY

D1002863 3

ADVANCED LIGO

3

DRAWING TREE #	DCN #	DATE	REV.
 _	E1000822-v1	19 MAY 2011	v1
-	-	-	-
-	-	-	-
0			
0			

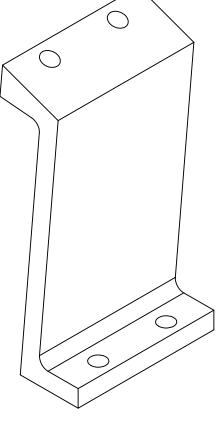

G

D

GENERAL VIEW FOR REFERENCE ONLY NO SCALE

