


REVISIONS			
REV.	DESCRIPTION	APPROVED	DATE
A	RELEASED	AJL	11-5-96

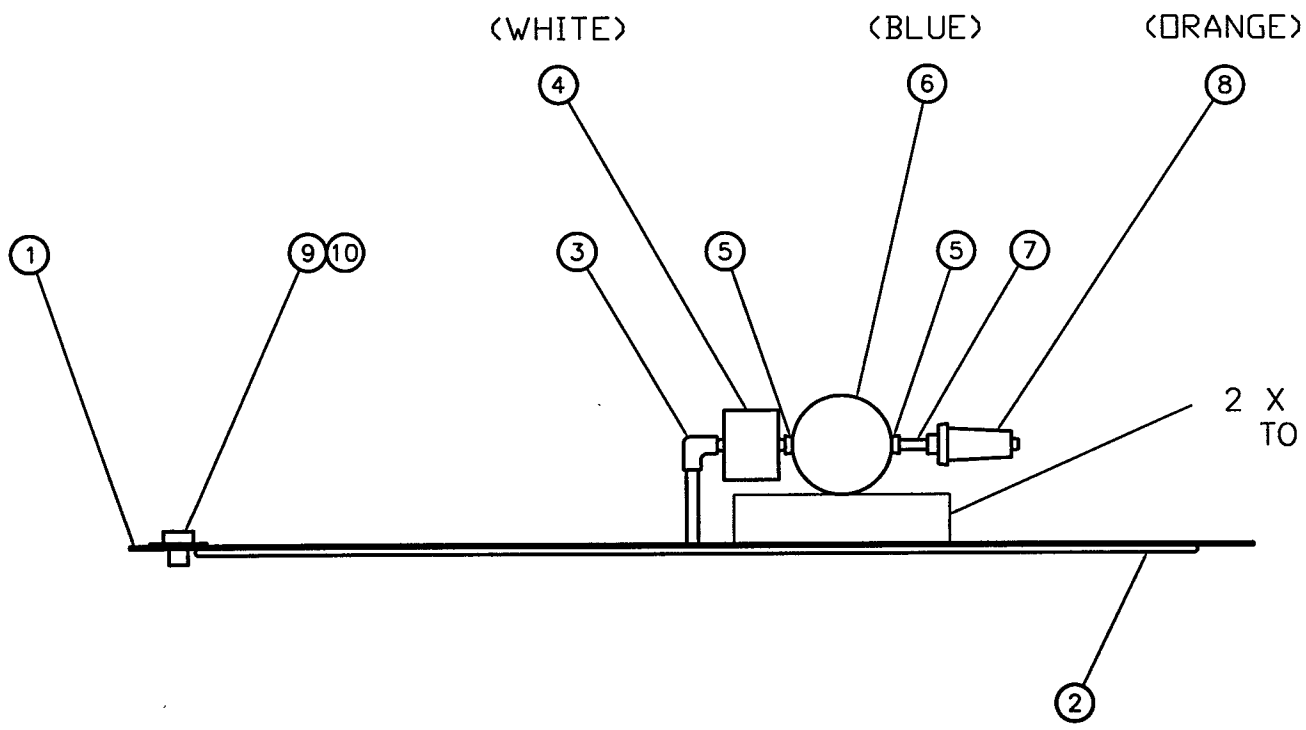

MIGO-D961679-A-V DEC 19 1996
 PSI DWG # V049-8-563

ITEM	QTY.	PART NO.	DESCRIPTION
10	24		7/8" FLAT WASHER, PLATED STEEL
9	24		HHCS, 7/8-9 UNC X 1, NICKEL-PLATED STEEL
8	1	#6ZC63	(W.W. GRAINGER) DISPOSABLE IN-LINE DESSICANT FILTER/DRYER
7	1		1/4" X 1/4" NIPPLE, PVC
6	1	#4422K2	(McMASTER-CARR) EASY-VIEW FILTER
5	2		3/8" X 1/4" HEX BUSHING, PVC
4	1	#43825K11	(McMASTER-CARR) SUBMICRONIC FILTER
3	1		1/4" X 1/4" 90 DEGREE EL, PVC
2	1		O-RING, BUNA, 3/16" C/S, 47.40 I.D.
1	1	B103759	WELDMENT, SHIPPING COVER, CARRIAGE SIDE FLANGE

PART LIST		MATERIAL SPECIFICATION: 304 SST	
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FINISH DECIMALS ANGLES .XX ± .01 ± 1° 32' .XXX ± .005</small>		GNB Corporation SCIENTIFIC AND INDUSTRIAL EQUIPMENT 30971 San Benito Ct. HAYWARD, CALIFORNIA 94544 (510) 441-1900 FAX: (510) 441-0939	
<small>UNSPECIFIED FILLETS: R.015 BREAK EDGES .010 ± 45° REMOVE ALL BURRS</small>		TITLE ASSEMBLY, SHIPPING COVER, CARRIAGE SIDE FLANGE	
<small>THIRD ANGLE PROJECTION</small> 		DRAFTER AJL DATE 11-5-96 CHECKER ENGINEER	
<small>DO NOT SCALE DRAWING</small>		DWG. NO. 103758 SCALE: NONE SHEET 1 OF 1	
USED ON CAUD FILE NAME B103758A		REV. A	