
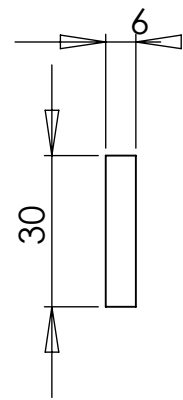


NOTES CONTINUED:

⑤ SCRIBE, ENGRAVE, OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER AND REVISION ON NOTED SURFACE FOLLOWED ON THE NEXT LINE BY A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE .07" HIGH CHARACTERS. EXAMPLE: DXXXXXXX-VY, S/N 001. A VIBRATORY TOOL MAY BE USED.

⑥ MACHINE ALL SURFACES.

REV.	DATE	DCN #	DRAWING TREE #

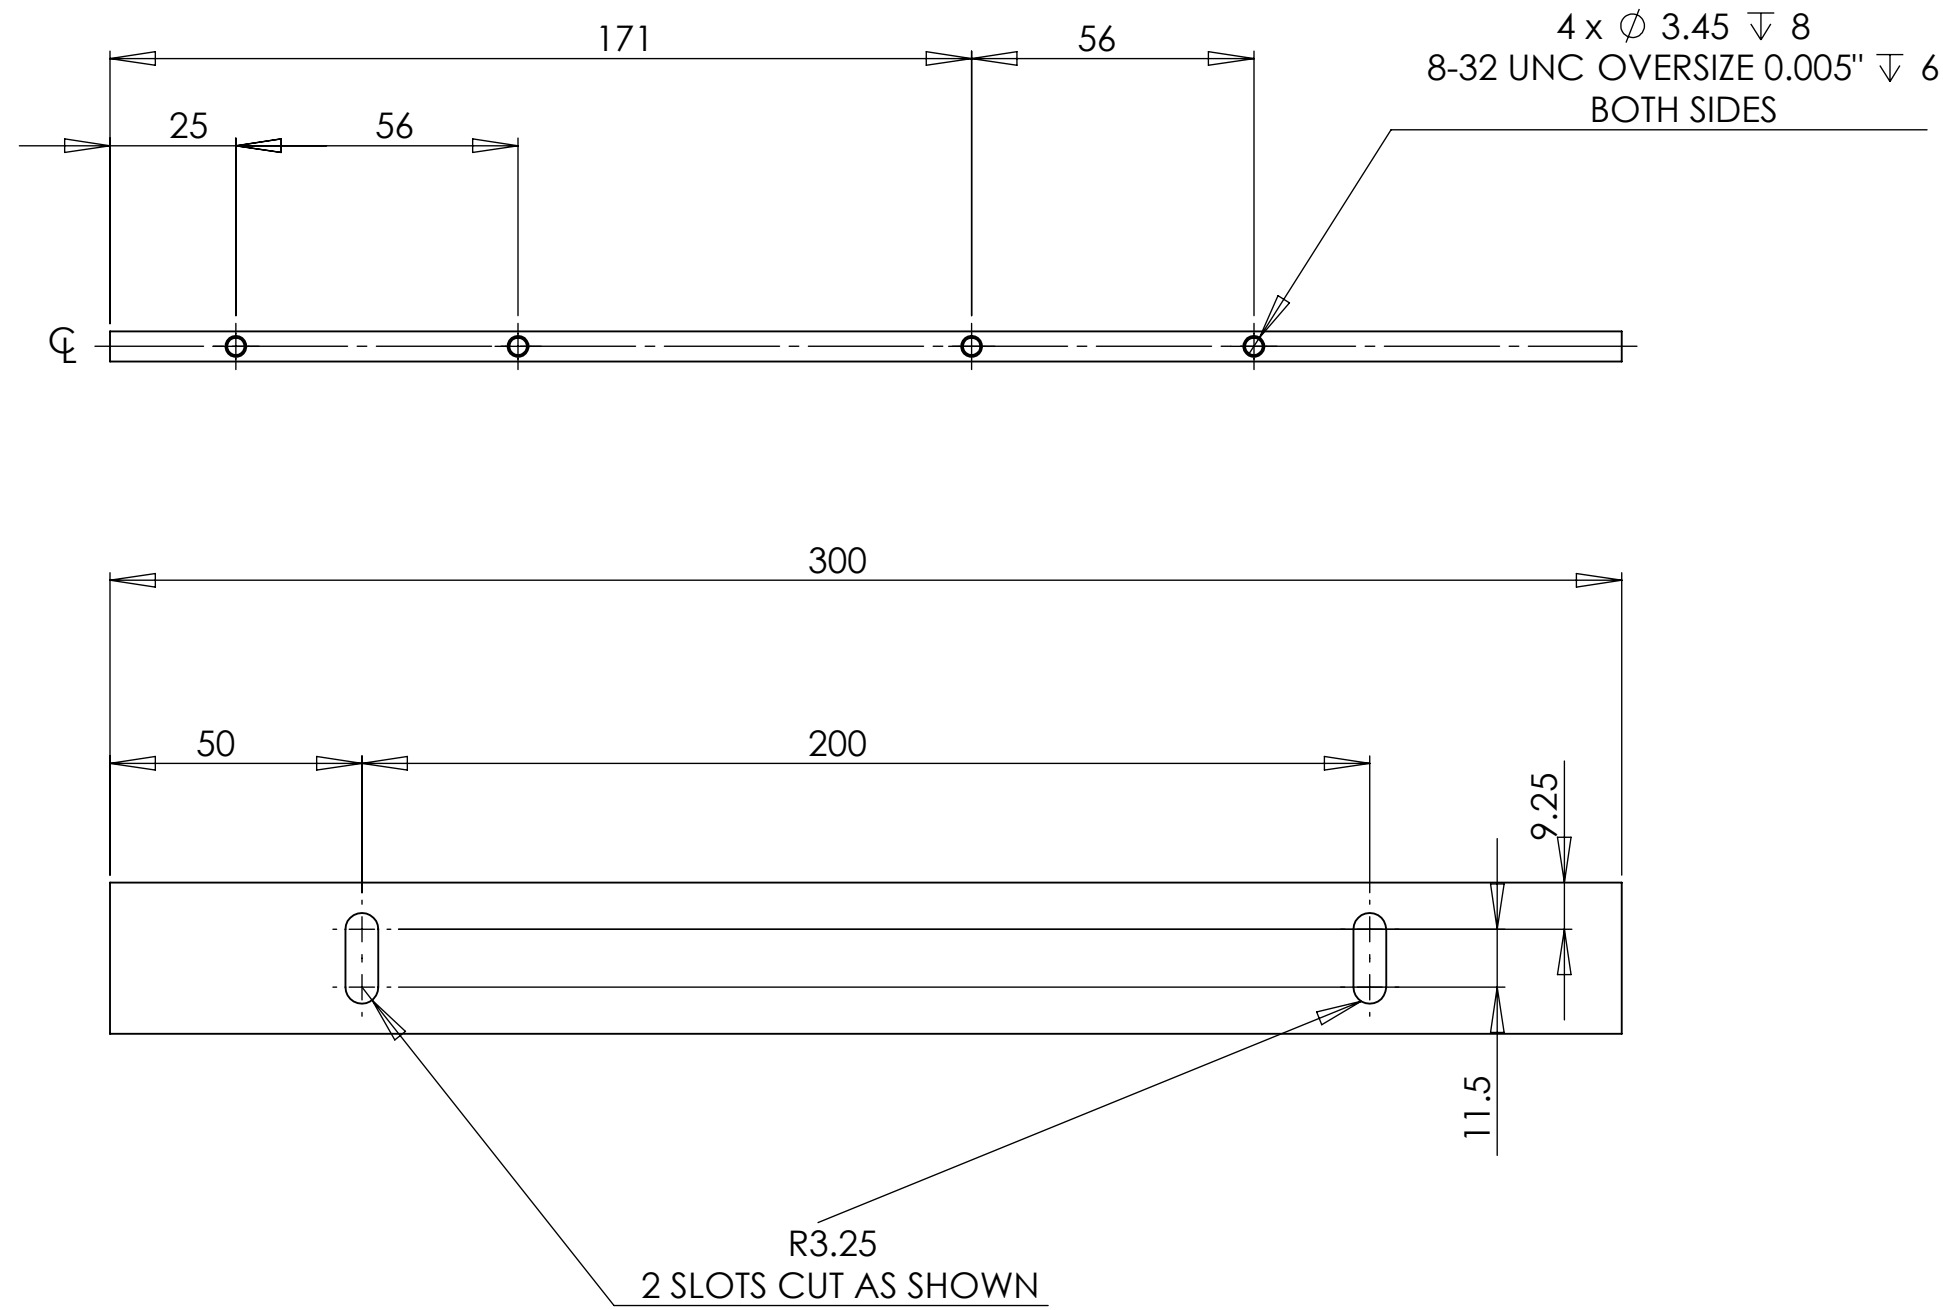

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

1. INTERPRET DRAWING PER ASME Y14.5-1994.
2. REMOVE ALL SHARP EDGES, R.02 MIN.
3. DO NOT SCALE FROM DRAWING.
4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.

**MATERIAL** 6061-T6 Al **FINISH** 1.6 μm



**SYSTEM** ADVANCED LIGO **SUB-SYSTEM** SUS

**NEXT ASSY**

**PART NAME** FIBRE BOW HOLDER BASE

<b>DESIGNER</b> L.CUNNINGHAM	<b>SIZE</b> c	<b>DWG. NO.</b> D1001827	<b>REV.</b> v1
<b>DRAFTER</b> L.Cunningham			
<b>CHECKER</b>			
<b>APPROVAL</b>	<b>SCALE:</b> 1:1.5	<b>PROJECTION:</b>	<b>SHEET</b> 1 OF 1