



- NOTES:**
1. FOR PLAN SYMBOLS SEE DWG WA-E-002.
 2. WIRING FOR FIRE DETECTION SHALL BE CLASS "A", FOR FIRE ALARM DEVICES SHALL BE CLASS "B".
 3. DUCT MOUNTED SMOKE DETECTORS SHALL BE PROVIDED WITH AN AUXILIARY RELAY CONTACT (N.C.) FOR EQUIPMENT SHUT-DOWN.
 4. NOT USED.
 5. COORDINATE AND LOCATIONS AND DUCT MOUNTED SMOKE DETECTORS.

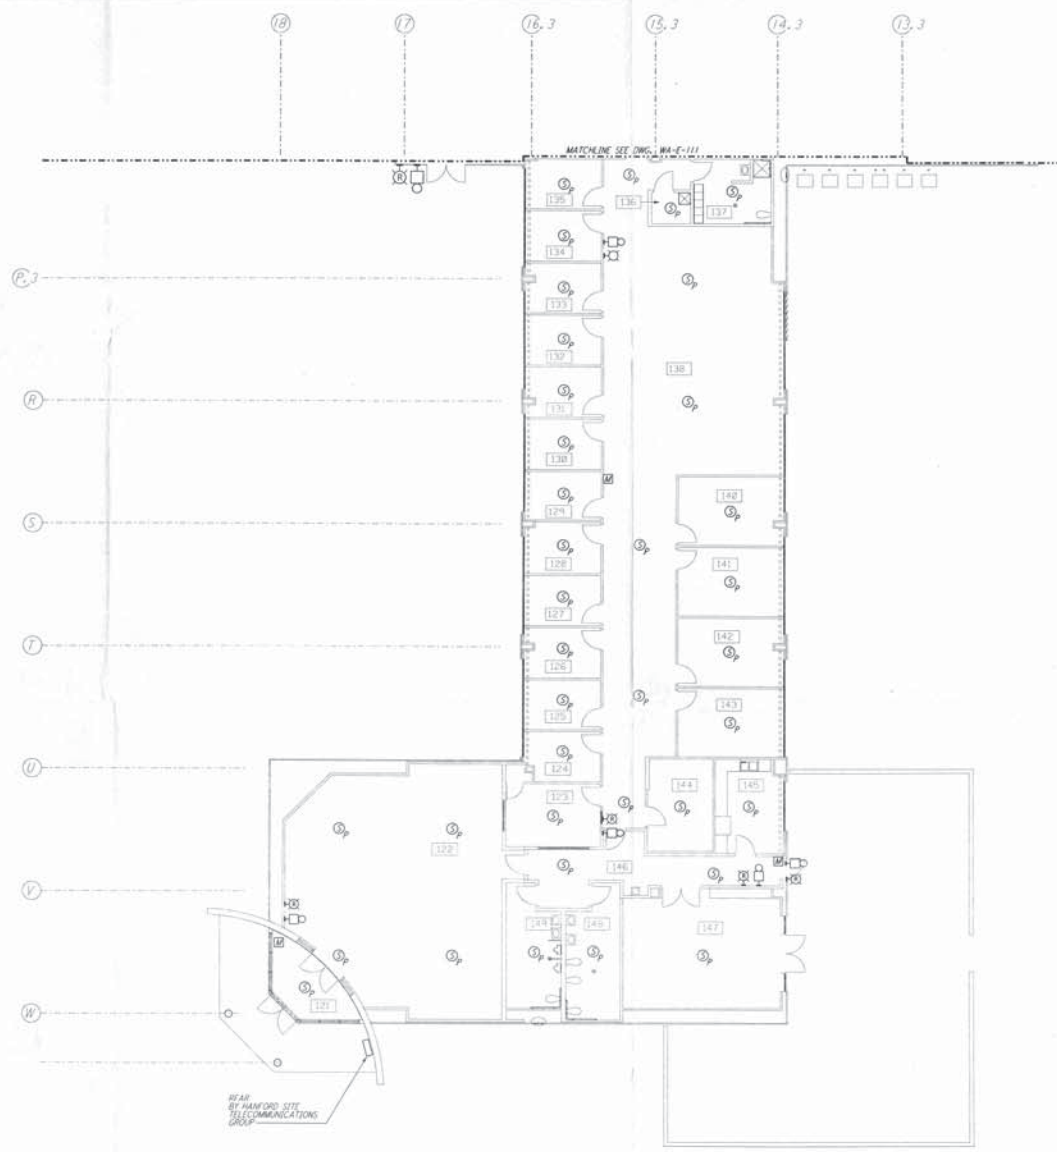

This document and the design it covers are the property of PARSONS. They are loaned only with the borrower's expressed written agreement that they will not be reproduced, copied, loaned, exhibited, or used in any other way, except by written consent from PARSONS to the borrower.

NO.	DATE	BY	CHKD	ENGR	PROJ	DESCRIPTION

ISSUED FOR CONSTRUCTION
 DRAWN M.M. 6-25-96
 CHECKED *[Signature]* 7-2-96
 ENGINEER *[Signature]* 7-2-96
 PROJ. *[Signature]* 7-2-96




PARSONS
 100 WEST WALNUT STREET
 PASADENA, CALIFORNIA


 CALIFORNIA INSTITUTE OF TECHNOLOGY
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY

LASER INTERFEROMETER
 GRAVITATIONAL-WAVE OBSERVATORY
 SITE NO. 1 - HANFORD, WASHINGTON
 TITLE: ELECTRICAL CORNER STATION OSB OFFICE AREA FIRE DET & SECURITY PLAN
 AS NOTED PPI50969 8094
WA-E-110