


1. CLEAR ANODIZE PER MIL-A-8625

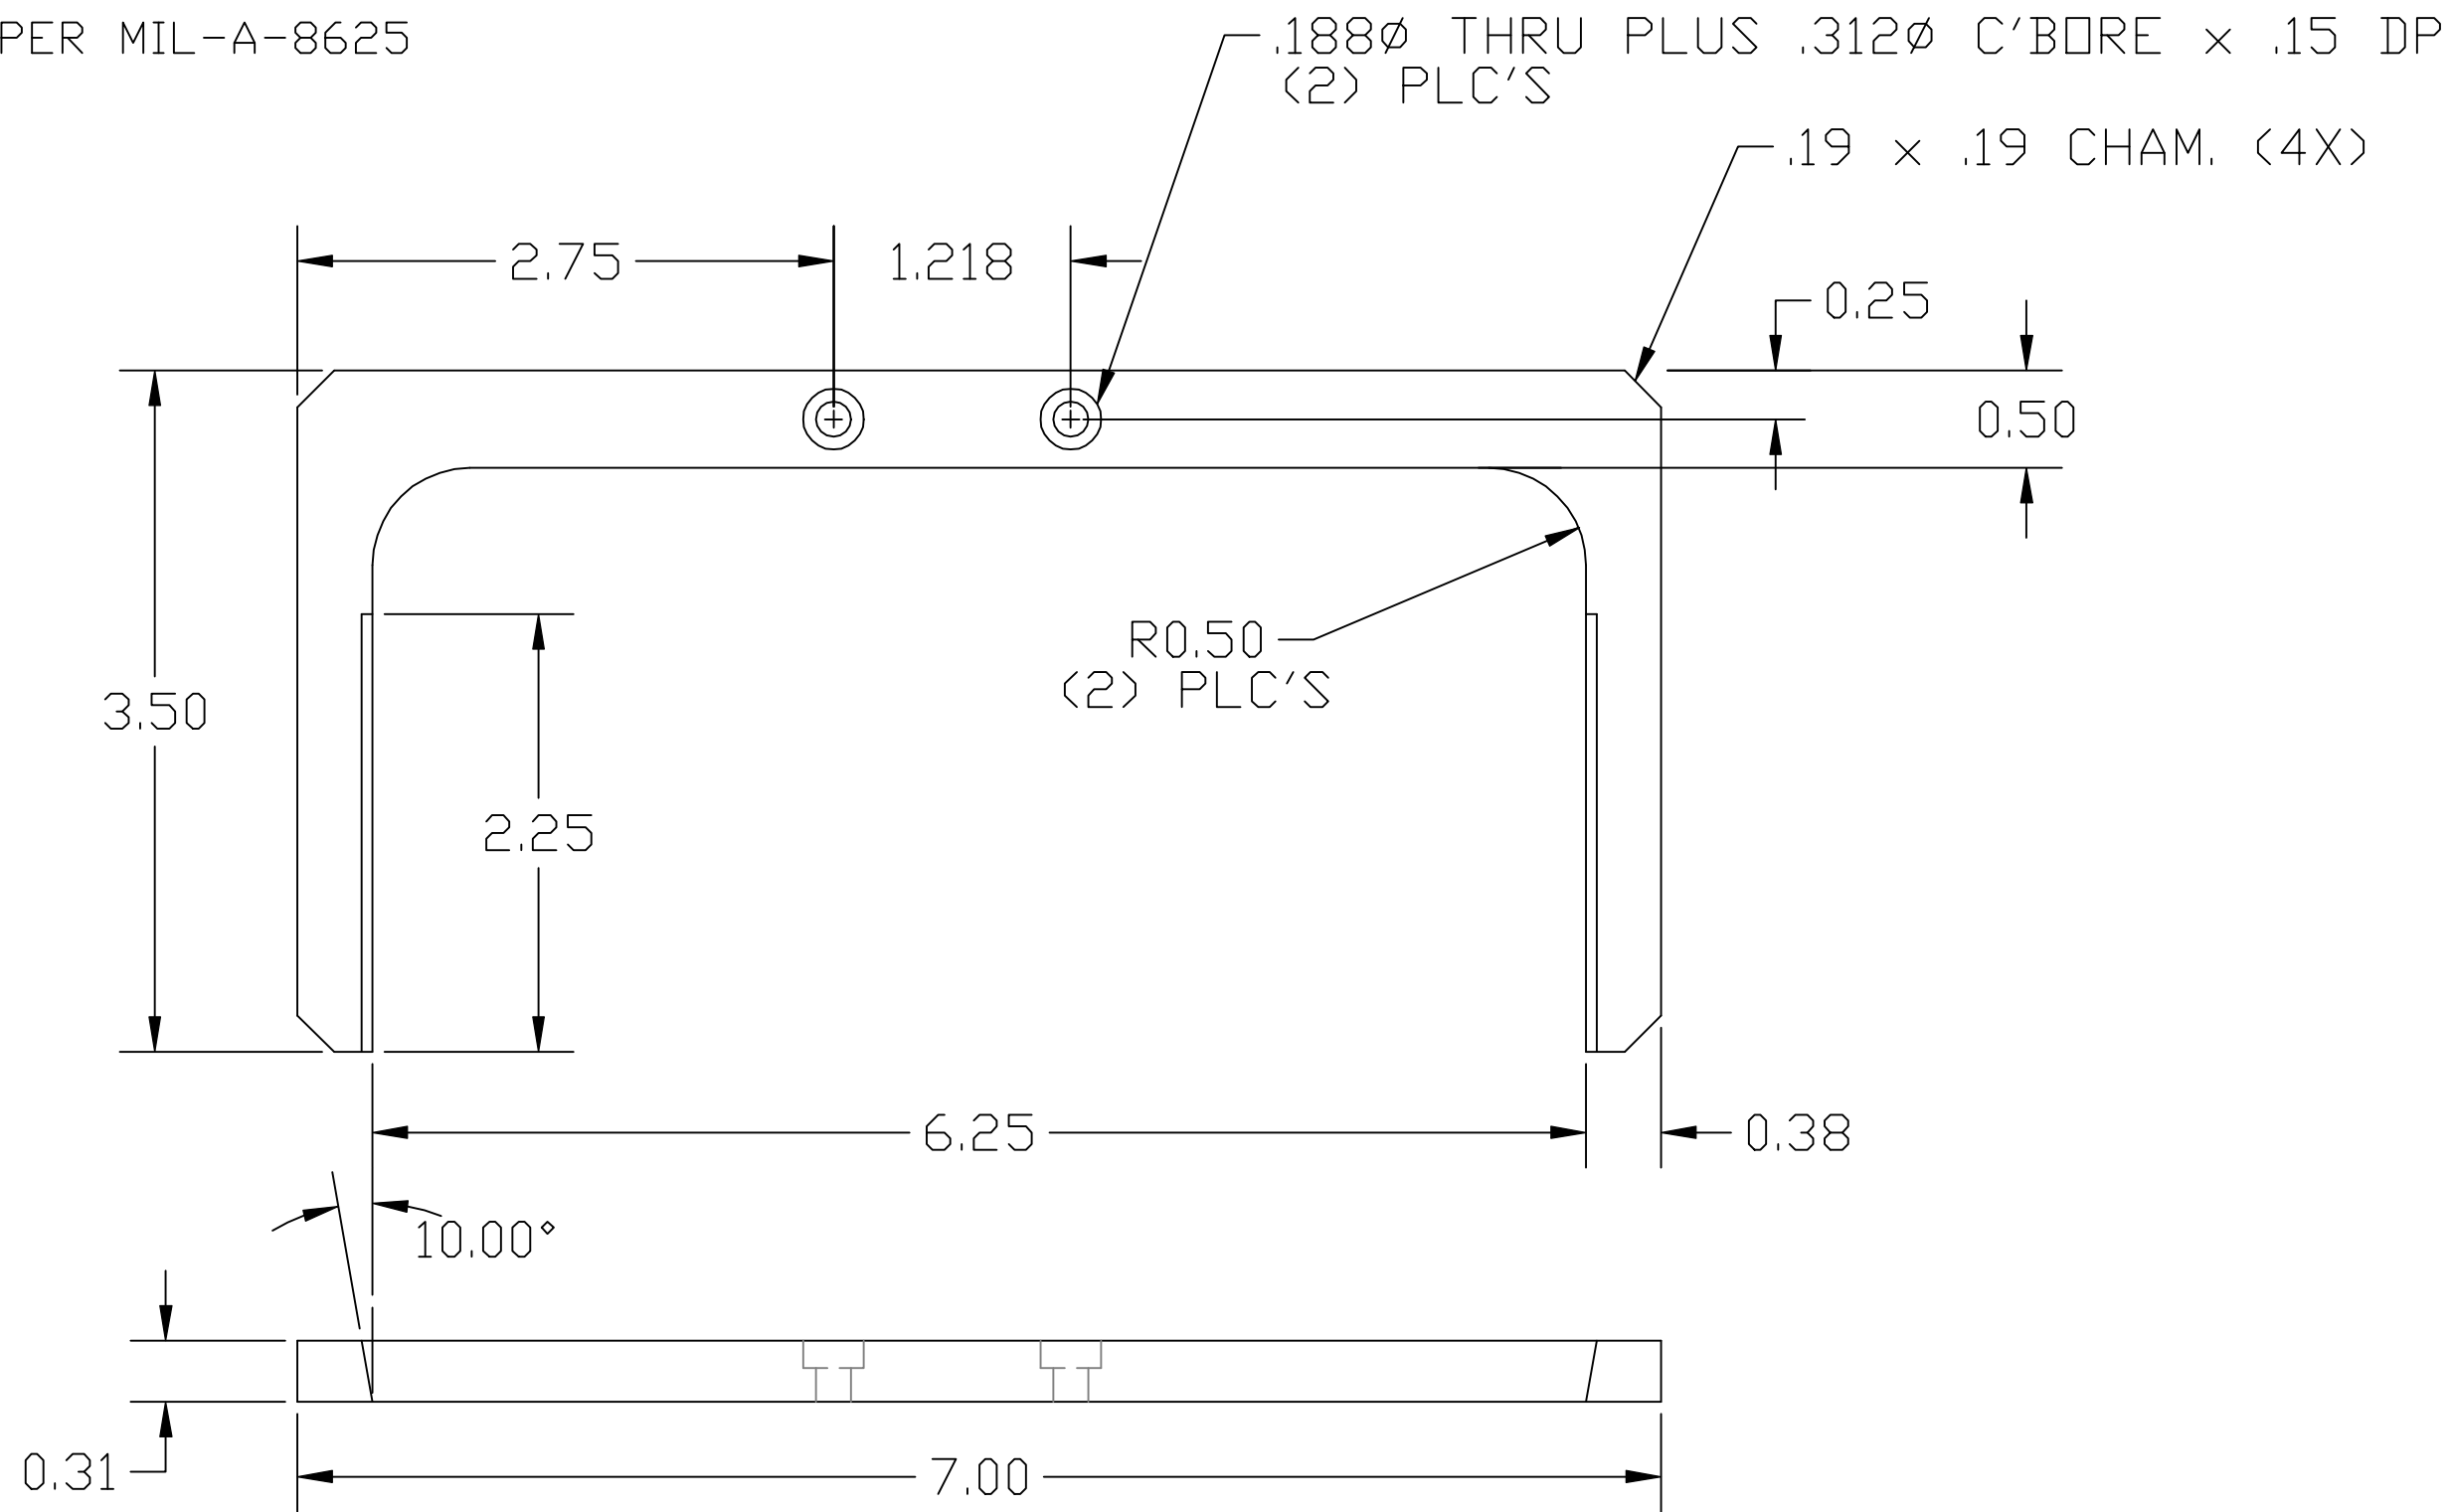

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES:
FRACTIONAL ±1/16(.16)
ANGULAR ± 1°
TWO PLACE DECIMAL ±.01(.025)
THREE PLACE DECIMAL ±.005(.013)

FINISHED SURFACE RMS 63
BREAK CORNERS IN: .02
REMOVE ALL BURRS

MATERIAL: 6061-T6 ALUM.
HEAT TREAT: -
FINISH: -

USED ON: IAS FIELD STATION
NEXT ASSY: D980410-A-D

REV	DESCRIPTION	DCC	SYS	DET	CDS	VE	CC	BT	CHECK	DRWN	DATE
A	INITIAL RELEASE									MASON	1/10/00
00	PRE-RELEASE									K.MASON	9/21/98

MIT
CALIFORNIA INSTITUTE OF TECHNOLOGY
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

STOP
LASER AUTOCOLLIMATOR
MOUNT
IAS FIELD STATION

CAD FILE: D980436-A.dwg
SCALE: 1:1
SHEET: 1 OF 1

DWG. NO.	DESCRIPTION
6	REFERENCE DRAWINGS