


NOTES:

1. CLEAR ANODIZE PER MIL-A-8625

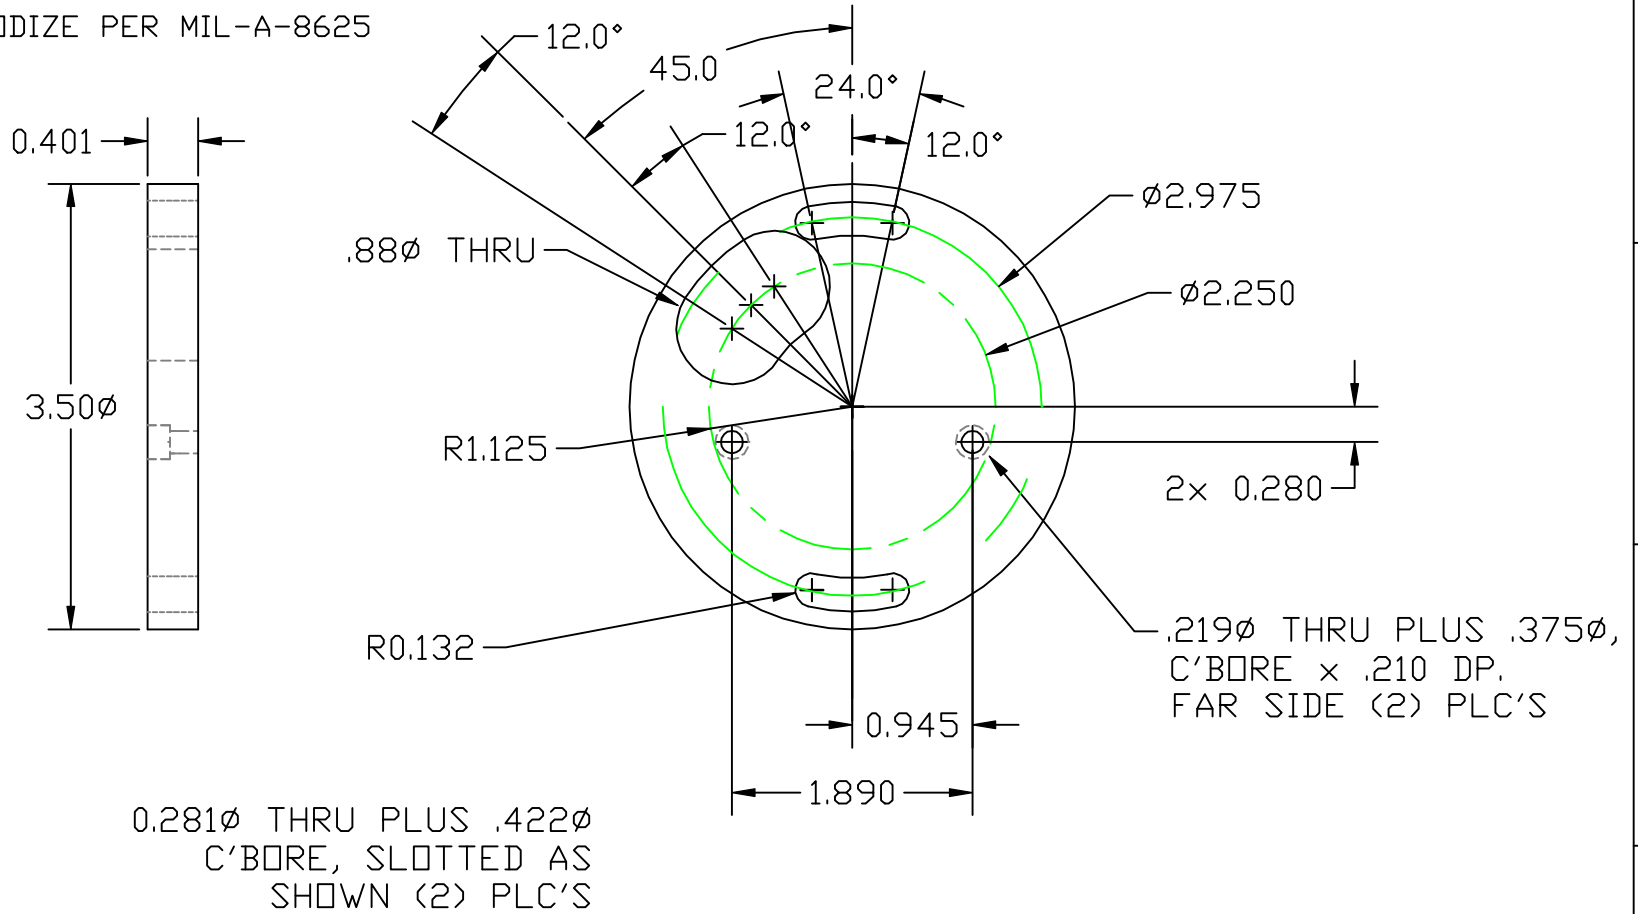

0.281 $\phi$  THRU PLUS .422 $\phi$   
C'BORE, SLOTTED AS  
SHOWN (2) PLC'S

.219 $\phi$  THRU PLUS .375 $\phi$ ,  
C'BORE  $\times$  .210 DP.  
FAR SIDE (2) PLC'S

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		TOLERANCES: FRACTIONAL $\pm 1/16(.16)$ ANGULAR $\pm 1^\circ$ TWO PLACE DECIMAL $\pm .01(.025)$ THREE PLACE DECIMAL $\pm .005(.013)$		FINISHED SURFACE RMS 63 BREAK CORNERS IN .02 REMOVE ALL BURRS		MATERIAL: 6061-T6 ALUM.		HEAT TREAT: -		FINISH: SEE NOTE 1		CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY	
A RELEASE		J1 make .88 dia hole slotted		00 PRE-RELEASE		SMITH 07/99		SMITH 07/99		FOLDING MIRROR BASE ETM, TRANSMISSION MONITOR		D990406-A	
DWG. NO.	DESCRIPTION	REV	DESCRIPTION	ISSUE DESCRIPTION	DATE	CHECK	DRWN	DATE	SCALE	FULL	SHEET	1 OF 1	
6	REFERENCE DRAWINGS	5	USED ON ETM	NEXT ASSY: D990414	4								