

6

5

4



3

2


1

1. CLEAR ANODIZE PER MIL-A-8625

NOTES:

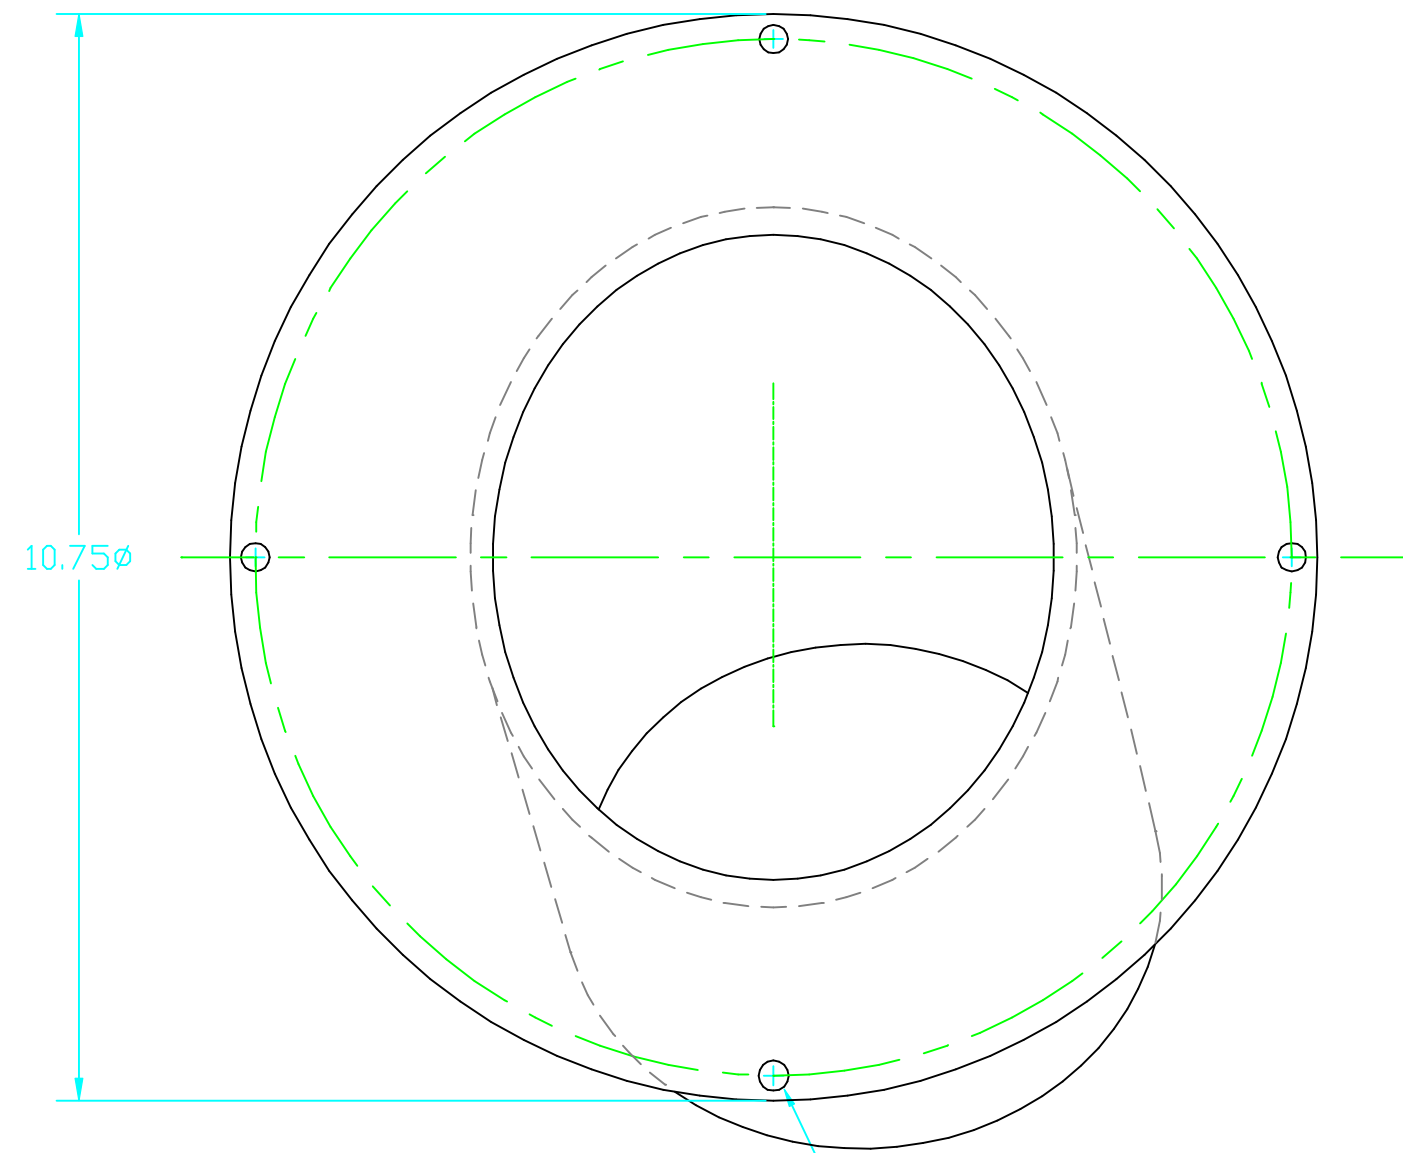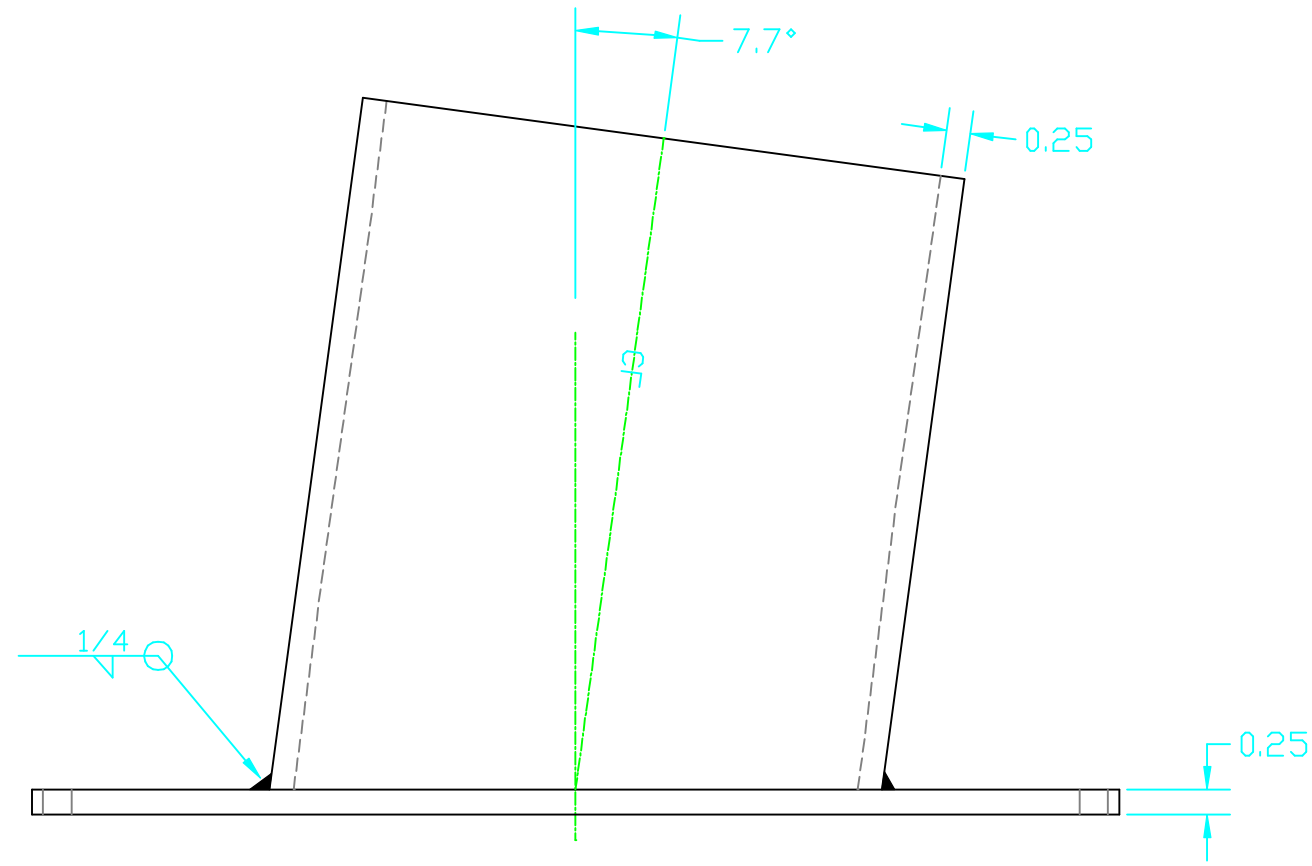

.281∅ THRU (4) HOLES EQ SP ON A
10.250∅ B.C.

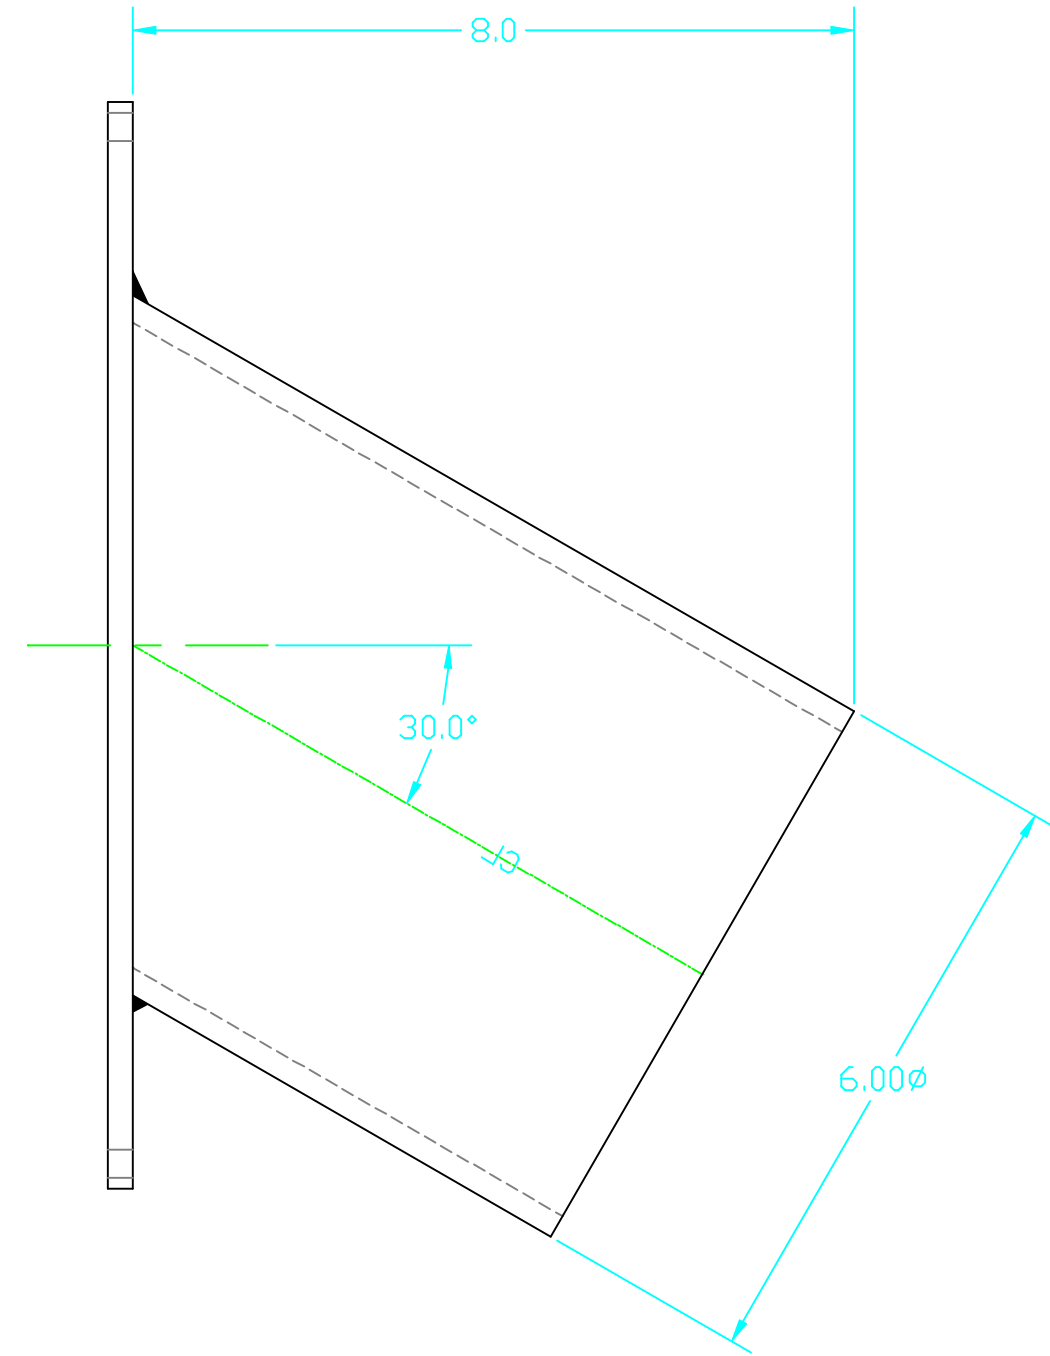

REF	QTY	PART or DRWG No.	CDS										MATERIAL	
PARTS and MATERIAL LIST														
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN FEET (cm) TOLERANCES: FRACTIONAL ± 1/16(.16) FINISHED SURFACE RMS 63 ANGULAR ± 1° BREAK CORNERS: .02 TWO PLACE DECIMAL ± .01(.025) REMOVE ALL BURRS THREE PLACE DECIMAL ± .005(.013)														
MATERIAL: 6061-T6 ALUM			HEAT TREAT: -			FINISH: -			A INITIAL RELEASE			K.MASON 11/19/99		
USED ON: -			NEXT ASS'Y: -			00 PRE-RELEASE			MASON 8/17/99			SCALE 1:2		
DWG. NO. REFERENCE DRAWINGS			DESCRIPTION			DCC			SYS			DET		
6			5			4			3			2		
1			1			1			1			1		

MIT
 CALIFORNIA INSTITUTE OF TECHNOLOGY
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY
 VIEWPORT ADAPTER
 ITM_y
 ISC TABLE ASSEMBLY
 CAD FILE: D990520-A.dwg
 DWG. NO.: D990520-A-D
 SHEET 1 of 1