
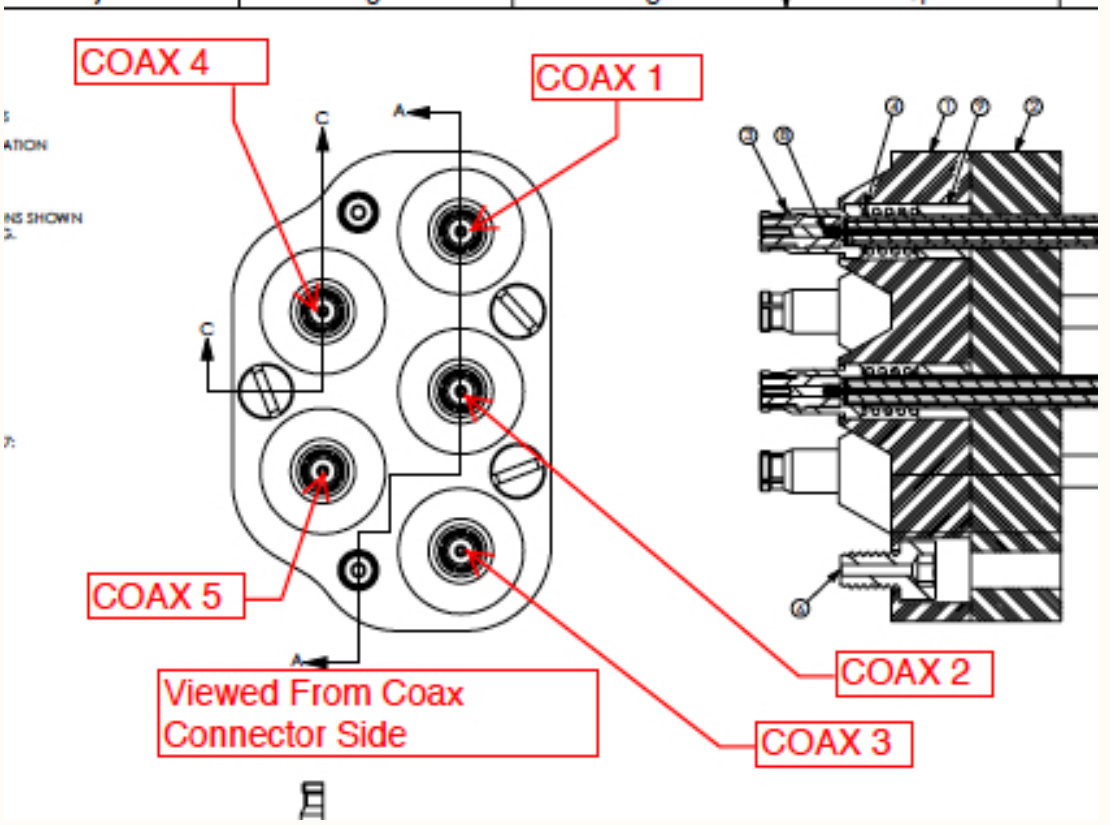


A

B

C

D

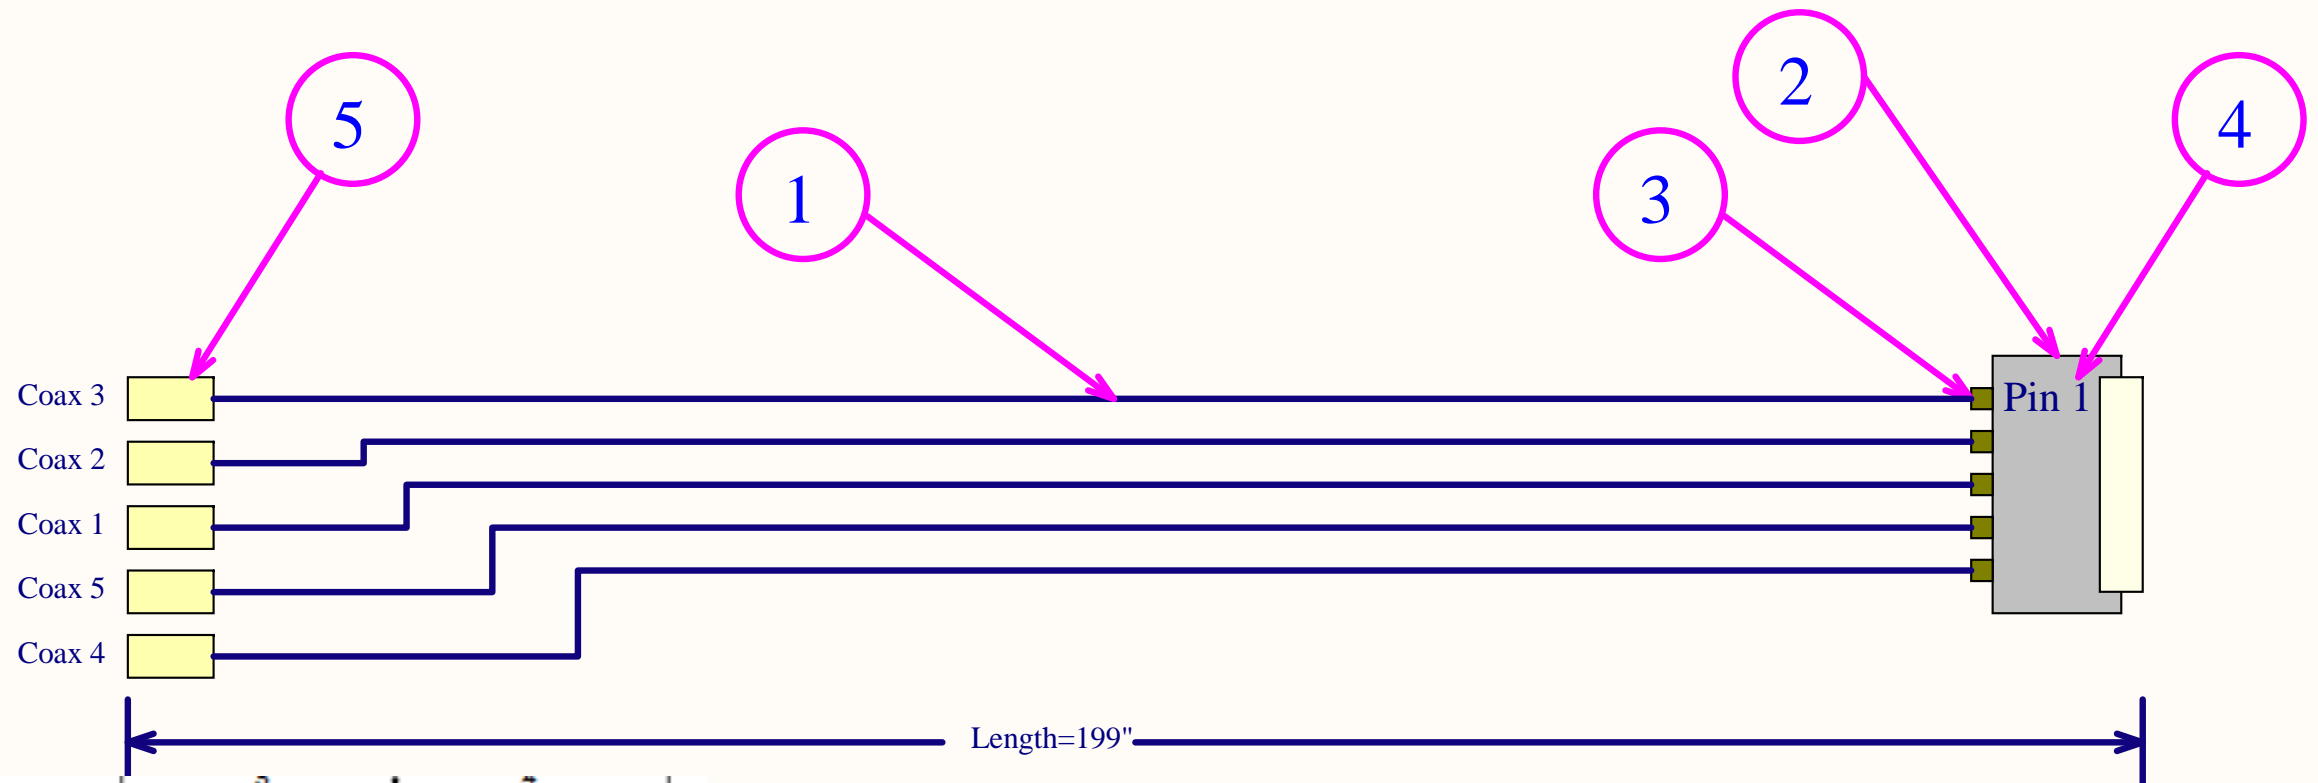

PARTS LIST			
ITEM #	QNTY	PART NUMBER	DESCRIPTION
1	5	9316	Alpha Wire part number 9316 RG-316 Digi-Key part number A315-1000-ND
2	1	25D-5CX-PKP	Accuglass Male UHV D style coax connector backshell
3	5	Various	Each Coax Connection Contains: AccuGlass Part Number 110963 with custom PEEK insert
4	1	Pin 1	Pin 1 is defined as the coax connector that is offset from the regular spacing of the other 4 connectors.
5	5	930259-1-199	SRI Coax Connector and attached coax. The last number of the part number designates the length of coax attached to the connector by SRI. In this case the length is 199 inches. Ref Drawing D1101689 for coax locations