

Test Report 126 MOPA #102

Test Report 126-MOPA #102

by

Werner Wiechmann

Tom Kane

Lightwave Electronics Corporation

1161 San Antonio Road

Mountain View, CA 94043

January 13, 1998

1. Performance

1.1. Performance Target Specifications as per LIGO-E970055-02-D

<i>Parameter</i>	<i>Specification</i>
1. Power in circular TEM ₀₀ mode	> 10 W
2. Total power in all non-TEM ₀₀ modes	< 1 W ($M_{\text{horizontal}} \times M_{\text{vertical}} < 1.1$)
3. Relative spot size fluctuations, $\delta w/w$	< 2 % peak-to-peak
Relative Power Fluctuations, $\delta P(f)/P$:	
4. Drift over 24 hours	< 1 % peak-to-peak
5. Drift over 500 hours	< 3 % peak-to-peak
6. 1-100 Hz	< [-100 + 40 log(100 Hz/ f)] dB/ Hz
7. 100 Hz - 10 kHz	< -100 dB/ Hz
8. 10 kHz - 3 MHz	< -120 dB/ Hz
9. 10 MHz	< -163 dB/ Hz (within 2 dB of the shot noise limit for 10 mA photodetected current)
Relative Power Fluctuations, $\delta P(f)/P$, at 60 Hz Line Frequency and Harmonics:	
10. 60 Hz and 120 Hz	< 1×10^{-5} rms
11. Between 150 Hz and 10 kHz	< 1×10^{-5} rms
12. Between 10 kHz and 3 MHz	< 2.4×10^{-6} rms
13. Relative power fluctuations, $\delta P(f)/P$, at Model 126 power supply switching frequency (~80 kHz) and power amplifier power supply switching frequency	< 2×10^{-5} rms
Frequency Fluctuations:	
14. Between 40 Hz and 100 Hz	< [54 + 50 log(100 Hz/ f)] dB Hz ² / Hz
15. Between 100 Hz and 10 kHz	< [54 + 20 log(100 Hz/ f)] dB Hz ² / Hz

Test Report 126 MOPA #102

<i>Parameter</i>	<i>Specification</i>
Frequency Drift:	
16. At constant ambient temperature	< 50 MHz/ hour
17. At constant ambient temperature	< 1 GHz/ month
18. Per degree ambient temperature change	< 30 MHz
Frequency-to-Intensity Conversion:	
19. Fractional power change (W/W) per Hz of frequency change	< 2×10^{-10}
Relative Pointing Angle Fluctuations, $\delta\theta / (\theta_d / 2)$, (divergence half angle, $\theta_d / 2 = \lambda / (\pi \times w_0)$):	
20. Drift over 24 hours	< 2.5×10^{-2} peak-to-peak
21. 40 Hz to 150 Hz	< $[-110 + 40 \log(150 \text{ Hz} / f)] \text{ dB/ Hz}$
22. > 150 Hz	< -110 dB/ Hz
Relative Transverse Position Fluctuations, $\delta x / w$:	
23. Drift over 24 hours	< 2.5×10^{-2} peak-to-peak
24. 40 Hz to 150 Hz	< $[-110 + 40 \log(150 \text{ Hz} / f)] \text{ dB/ Hz}$
25. > 150 Hz	< -110 dB/ Hz
26. Polarization extinction ratio	> 300:1
27. Electromagnetic interference (EMI) emissions	In compliance with CE mark, EN 55011 Class A
Reliability:	
28. Mean time between failure (MTBF)	> 10,000 hours
29. Minimum time between required beam alignment adjustment	> 2,500 hours

1.2. 126-MOPA #102 Measured Performance

Parameter	Measured Performance	Meets Specification ?		
		Yes	No	Comment
1. Power in circular TEM ₀₀ mode	10.0 W	(x)		beam not circular;
2. Total power in all non-TEM ₀₀ modes	0.7 W ($M_{\text{horizontal}} = 1.049$, $M_{\text{vertical}} = 1.020$)	x		
3. Relative spot size fluctuations, $\delta w/w$	horizontal: 1.4±1.0 % peak-to-peak vertical: 1.2±1.0 % peak-to-peak	x x		300 samples at 1 sample per second;
Relative Power Fluctuations, $\delta P(f)/P$:				
4. Drift over 24 hours	0±1.0 % peak-to-peak	x		10 day measurement;
5. Drift over 500 hours	< 1 % peak-to-peak	x		
6. 1-100 Hz	see Fig. 1	x		
7. 100 Hz - 10 kHz	see Fig. 1	x		
8. 10 kHz - 3 MHz	see Fig. 1	(x)		except 10-15 kHz;
9. 10 MHz	-163.5 dB/ Hz (see Fig. 1)	x		
Relative Power Fluctuations, $\delta P(f)/P$, at 60 Hz Line Frequency and Harmonics:				
10. 60 Hz and 120 Hz	6.09×10^{-6} & 4.65×10^{-6} rms	x		peak near 950 Hz in Fig. 1 is acoustically driven (see Fig. 4-1);
11. Between 150 Hz and 10 kHz	3.32×10^{-6} at 180 kHz	x		
12. Between 10 kHz and 3 MHz	no detectable (at 0.3 Hz bandwidth) 60-Hz harmonics above 180 Hz	x		
13. Relative power fluctuations, $\delta P(f)/P$, at Model 126 power supply switching frequency (~80 kHz) and power amplifier power supply switching frequency	1.16×10^{-5} rms near 73 kHz	x		

Test Report 126 MOPA #102

Parameter	Measured Performance	Meets Specification ?		
		Yes	No	Comment
Frequency Fluctuations:				
14. Between 40 Hz and 100 Hz	see Fig. 2	x		
15. Between 100 Hz and 10 kHz	see Fig. 2	x		
Frequency Drift:				
16. At constant ambient temperature (MHz/hour)	8 MHz/hour (from beat-note measurement with second NPRO)	x		
17. At constant ambient temperature (MHz/month)	not measured	?		
18. Per degree ambient temperature change	not measured	?		
Frequency-to-Intensity Conversion:				
19. Fractional power change (W/W) per Hz of frequency change	see Fig. 3		x	
Relative Pointing Angle Fluctuations, $\delta\theta / (\theta_d / 2)$, (divergence half angle, $\theta_d / 2 = \lambda / (\pi \times w_0)$):				
20. Drift over 24 hours	horizontal: $< 0.2 \times 10^{-2}$ peak-to-peak vertical: $< 4.0 \pm 3 \% \times 10^{-2}$ peak-to-peak	x	(x)	data are a superposition of relative transverse position and pointing angle fluctuations;
21. 40 Hz to 150 Hz	horizontal: see Fig. 4-1 vertical: see Fig 4-3	x (x)		except near 100 Hz vertical and near 160 Hz horizontal;
22. > 150 Hz	horizontal: see Fig. 4-2 vertical: see Fig 4-4	(x) x		

2. Configuration

2.1. Configuration Target Specification as per LIGO-E970055-02-D

<i>Parameter</i>	<i>Specification</i>
30. Type of laser	Nd ³⁺ :YAG
31. Wavelength	1064 nm
32. Optical scheme	Master Oscillator Power Amplifier, double-pass
33. Amplifier pumping	8 x 20-W diode bar, direct-coupled, side pumped
Frequency Control:	
34. Thermal tuning range, continuous	10 GHz
35. Thermal tuning range, total	30 GHz
36. Thermal tuning rate	1 GHz/ sec
37. Piezo tuning range, ±15 V	30 MHz
38. Piezo response bandwidth, small signal	> 30 kHz
39. Warm-up time	< 1 hour
Laser head, mechanical:	
40. Support structure	2 ft. x 2 ft., ¼ in.-20 tapped holes on 1 in. square grid
41. Modules/ components	a. Model 126-1064-700 master oscillator b. Power amplifier, sealed c. Coupling and beam control optics
42. Beam height above support structure	TBD ±0.05 in.
43. Cover	Removable dust protective cover, metal
44. Total laser height	< 1 ft.
45. Distance from laser head to power supplies	Up to 50 ft.

Test Report 126 MOPA #102

<i>Parameter</i>	<i>Specification</i>
Laser head, optical: 46. Output beam waist spot size, w_0 47. Output beam waist location	0.25 mm TBD \pm 0.1 mm TBD \pm 50 mm from output aperture
Laser chiller: 48. Type 49. Manufacturer, Model 50. Cooling capacity 51. Pumping capacity 52. Dimensions (h x w x d) 53. Distance from laser head to chiller 54. Distance from chiller microprocessor controller to chiller	Low-temperature, bath circulator Neslab, RTE-140M 600 W at 10 °C, at ambient temp. of 20 °C 0.9 gpm through 100 ft. length of 3/8 in. ID hose 66.0 cm x 31.4 cm x 48.3 cm (> 12 in. clearance at front and rear for ventilation) Up to 50 ft. Up to 50 ft.
55. Laser safety	In compliance with federal register 21 CFR 1040.10 & 1040.11 laser safety standard
56. Transportability	Transportable by commercial carrier without performance degradation

2.2. 126-MOPA #102 Configuration

Parameter	Configuration	Meets Specification ?		
		Yes	No	Comment
30. Type of laser	Nd ³⁺ :YAG	x		
31. Wavelength	1064 nm	x		
32. Optical scheme	Master Oscillator Power Amplifier, double-pass	x		
33. Amplifier pumping	8 x 20-W diode bar, direct-coupled, side pumped	x		
Frequency Control:				
34. Thermal tuning range, continuous	10 GHz	x		
35. Thermal tuning range, total	30 GHz	x		
36. Thermal tuning rate	1 GHz/ sec	x		
37. Piezo tuning range, ±10 V	DC: 5.3 MHz/V AC: 5.1 MHz/V	x		
38. Piezo response bandwidth, small signal	> 30 kHz	x		
39. Warm-up time	< 1 hour	x		
Laser head, mechanical:				
40. Support structure	2 ft. x 2 ft., ¼ in.-20 tapped holes on 1 in. square grid	x		
41. Modules/ components	a. Model 126-1064-700 master oscillator b. Power amplifier, sealed c. Coupling and beam control optics	x		
42. Beam height above support structure	2.35 in. ±0.05 in.	x		
43. Cover	Removable dust protective cover, metal	x		
44. Total laser height	8.2 in. ±0.2 in.	x		
45. Distance from laser head to power supplies	Up to 50 ft.	x		

Test Report 126 MOPA #102

Parameter	Configuration	Meets Specification ?		
		Yes	No	Comment
Laser head, optical:				
46. Output beam waist spot size, w_0	horizontal: 0.37 mm \pm 0.1 mm vertical: 0.44 mm \pm 0.1 mm	x		
47. Output beam waist location	horizontal: +6 mm \pm 20 mm from output aperture (outside laser) vertical: - 10 mm \pm 20 mm from output aperture (inside laser)	x		
Laser chiller:				
48. Type	Low-temperature, bath circulator	x		
49. Manufacturer, Model	Neslab, RTE-140M	x		
50. Cooling capacity	600 W at 10 °C, at ambient temp. of 20 °C	x		
51. Pumping capacity	0.9 gpm through 100 ft. length of 3/8 in. ID hose	x		
52. Dimensions (h x w x d)	66.0 cm x 31.4 cm x 48.3 cm (> 12 in. clearance at front and rear for ventilation)	x		
53. Distance from laser head to chiller	Up to 50 ft.	x		
54. Distance from chiller microprocessor controller to chiller	Up to 50 ft.	x		
55. Laser safety	In compliance with federal register 21 CFR 1040.10 & 1040.11 laser safety standard	x		
56. Transportability	May require minor realignment when transported by commercial carrier		x	

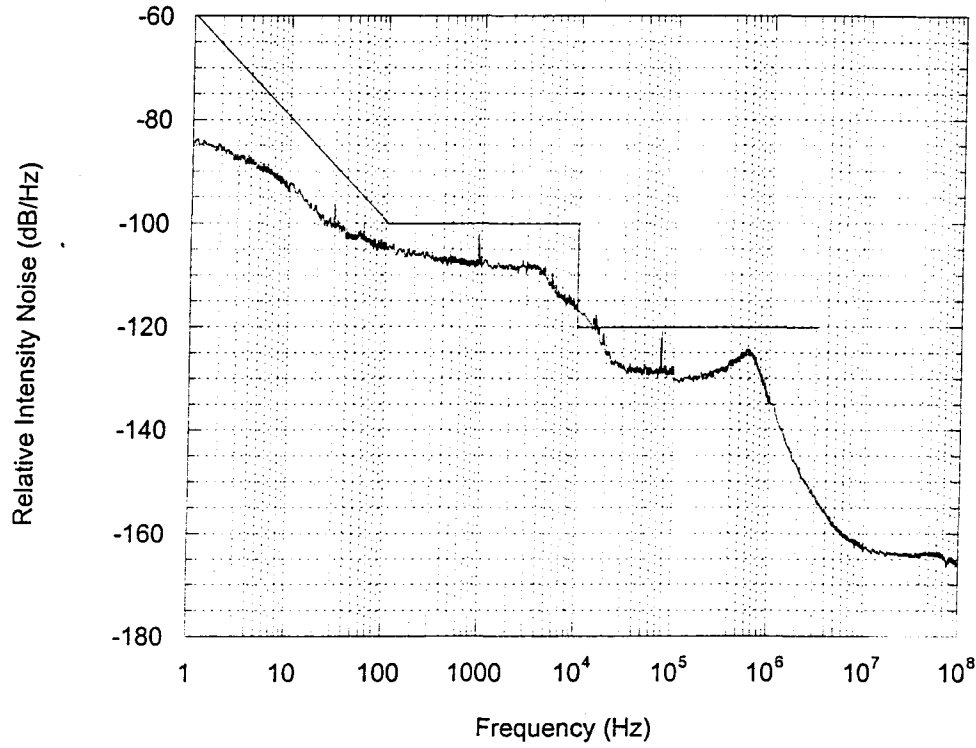


Fig. 1. Measured relative intensity noise of the amplified output at 10 mA photodetected current. The straight line shows specification 6, 7 and 8 of LIGO-E970055-02-D.

Test Report 126 MOPA #102

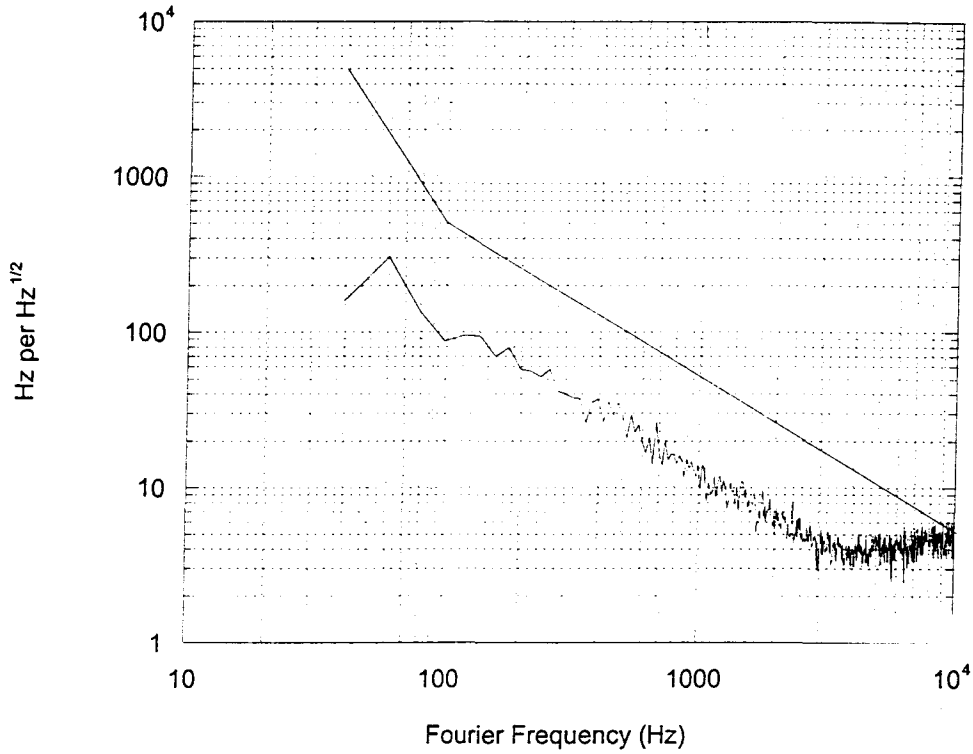


Fig. 2. Measured phase noise of the amplified output. The straight line shows specifications 14 and 15 of LIGO-E970055-02-D.

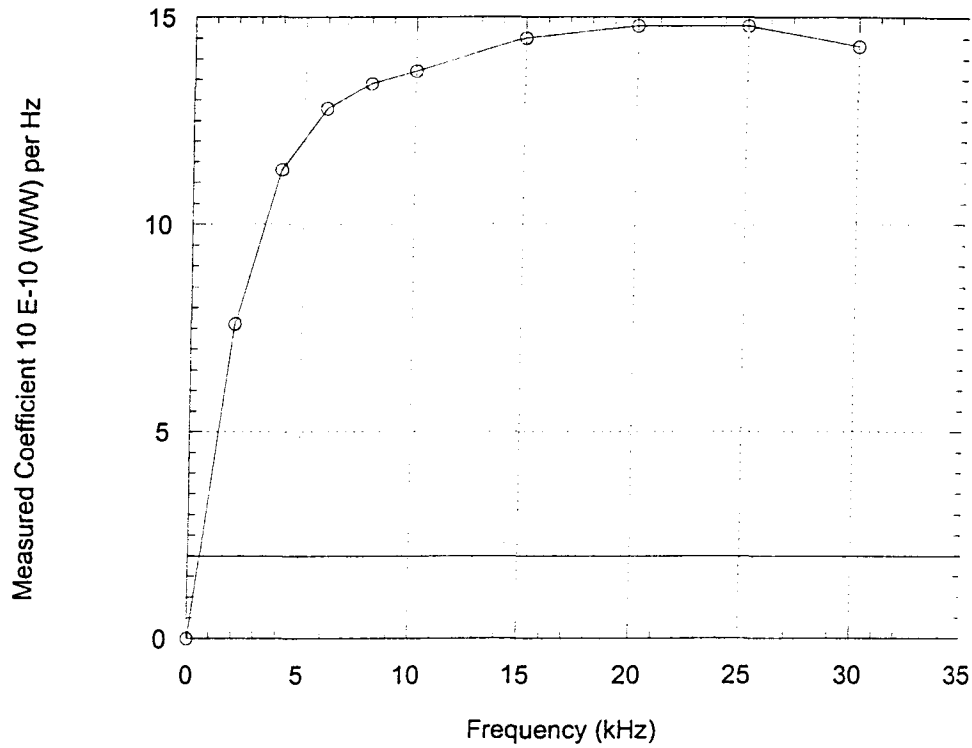


Fig. 3. Measured fractional power change (W/W) per Hz of frequency change. The straight line shows the coefficient defined in specification 19 of LIGO-E970055-02-D.

BATCH
START

STAPLE
OR
DIVIDER

Test Report 126-MOPA #102

(Refurbished with New Focus Mirror Mounts)

by

Werner Wiechmann

Tom Kane

Glen Truong

Lightwave Electronics Corporation

1161 San Antonio Road

Mountain View, CA 94043

May 21, 1998

1. Performance

1.1. Performance Target Specifications as per LIGO-E970055-02-D

<i>Parameter</i>	<i>Specification</i>
1. Power in circular TEM ₀₀ mode	> 10 W
2. Total power in all non-TEM ₀₀ modes	< 1 W ($M_{\text{horizontal}} \times M_{\text{vertical}} < 1.1$)
3. Relative spot size fluctuations, $\delta w/w$	< 2 % peak-to-peak
Relative Power Fluctuations, $\delta P(f)/P$:	
4. Drift over 24 hours	< 1 % peak-to-peak
5. Drift over 500 hours	< 3 % peak-to-peak
6. 1-100 Hz	< [-100 + 40 log(100 Hz/ f)] dB/ Hz
7. 100 Hz - 10 kHz	< -100 dB/ Hz
8. 10 kHz - 3 MHz	< -120 dB/ Hz
9. 10 MHz	< -163 dB/ Hz (within 2 dB of the shot noise limit for 10 mA photodetected current)
Relative Power Fluctuations, $\delta P(f)/P$, at 60 Hz Line Frequency and Harmonics:	
10. 60 Hz and 120 Hz	< 1×10^{-5} rms
11. Between 150 Hz and 10 kHz	< 1×10^{-5} rms
12. Between 10 kHz and 3 MHz	< 2.4×10^{-6} rms
13. Relative power fluctuations, $\delta P(f)/P$, at Model 126 power supply switching frequency (~80 kHz) and power amplifier power supply switching frequency	< 2×10^{-5} rms
Frequency Fluctuations:	
14. Between 40 Hz and 100 Hz	< [54 + 50 log(100 Hz/ f)] dB Hz ² / Hz
15. Between 100 Hz and 10 kHz	< [54 + 20 log(100 Hz/ f)] dB Hz ² / Hz

Test Report 126 MOPA #102

<i>Parameter</i>	<i>Specification</i>
Frequency Drift:	
16. At constant ambient temperature	< 50 MHz/ hour
17. At constant ambient temperature	< 1 GHz/ month
18. Per degree ambient temperature change	< 30 MHz
Frequency-to-Intensity Conversion:	
19. Fractional power change (W/W) per Hz of frequency change	< 2×10^{-10}
Relative Pointing Angle Fluctuations, $\delta\theta/(\theta_d/2)$, (divergence half angle, $\theta_d/2 = \lambda/(\pi \times w_0)$):	
20. Drift over 24 hours	< 2.5×10^{-2} peak-to-peak
21. 40 Hz to 150 Hz	< $[-110 + 40 \log(150 \text{ Hz}/ f)] \text{ dB/ Hz}$
22. > 150 Hz	< -110 dB/ Hz
Relative Transverse Position Fluctuations, $\delta x/ w$:	
23. Drift over 24 hours	< 2.5×10^{-2} peak-to-peak
24. 40 Hz to 150 Hz	< $[-110 + 40 \log(150 \text{ Hz}/ f)] \text{ dB/ Hz}$
25. > 150 Hz	< -110 dB/ Hz
26. Polarization extinction ratio	> 300:1
27. Electromagnetic interference (EMI) emissions	In compliance with CE mark, EN 55011 Class A
Reliability:	
28. Mean time between failure (MTBF)	> 10,000 hours
29. Minimum time between required beam alignment adjustment	> 2,500 hours

1.2. 126-MOPA #102 Measured Performance

Parameter	Measured Performance	Meets Specification ?		
		Yes	No	Comment
1. Power in circular TEM ₀₀ mode	10.3 W	(x)		beam not circular;
2. Total power in all non-TEM ₀₀ modes	0.97 W (M _{horizontal} = 1.070 , M _{vertical} = 1.020)	x		
3. Relative spot size fluctuations, $\delta w/w$	horizontal: 1.5±1.0 % peak-to-peak vertical: 1.5±1.0 % peak-to-peak	x x		300 samples at 1 sample per second;
Relative Power Fluctuations, $\delta P(f)/P$:				
4. Drift over 24 hours	0±1.0 % peak-to-peak	x		
5. Drift over 500 hours	see Test Report Jan. 13, 1998			
6. 1-100 Hz	see Test Report Jan. 13, 1998			
7. 100 Hz - 10 kHz	see Test Report Jan. 13, 1998			
8. 10 kHz - 3 MHz	see Test Report Jan. 13, 1998			
9. 10 MHz	see Test Report Jan. 13, 1998			
Relative Power Fluctuations, $\delta P(f)/P$, at 60 Hz Line Frequency and Harmonics:				
10. 60 Hz and 120 Hz	see Test Report Jan. 13, 1998			
11. Between 150 Hz and 10 kHz	see Test Report Jan. 13, 1998			
12. Between 10 kHz and 3 MHz	see Test Report Jan. 13, 1998			
13. Relative power fluctuations, $\delta P(f)/P$, at Model 126 power supply switching frequency (~80 kHz) and power amplifier power supply switching frequency	see Test Report Jan. 13, 1998			

Test Report 126 MOPA #102

Parameter	Measured Performance	Meets Specification ?		
		Yes	No	Comment
Frequency Fluctuations: 14. Between 40 Hz and 100 Hz 15. Between 100 Hz and 10 kHz	see Test Report Jan. 13, 1998 see Test Report Jan. 13, 1998			
Frequency Drift: 16. At constant ambient temperature (MHz/hour) 17. At constant ambient temperature (MHz/month) 18. Per degree ambient temperature change	see Test Report Jan. 13, 1998 not measured not measured			
Frequency-to-Intensity Conversion: 19. Fractional power change (W/W) per Hz of frequency change	see Test Report Jan. 13, 1998			
Relative Pointing Angle Fluctuations, $\delta\theta / (\theta_d / 2)$, (divergence half angle, $\theta_d / 2 = \lambda / (\pi \times w_0)$): 20. Drift over 24 hours 21. 40 Hz to 150 Hz 22. > 150 Hz	horizontal: $< 2.8 \times 10^{-2}$ peak-to-peak vertical: $< 2.3 \times 10^{-2}$ peak-to-peak horizontal: see Fig. 1-1 vertical: see Fig 1-3 horizontal: see Fig. 1-2 vertical: see Fig 1-4	x (x) (x) x	(x) x x	data are a superposition of relative transverse position and pointing angle fluctuations; except near 120 Hz and 195Hz horizontal; except near 310 Hz horizontal

Test Report 126 MOPA #102

Parameter	Measured Performance	Meets Specification ?		
		Yes	No	Comment
Relative Transverse Position Fluctuations, $\delta x/w$:				
23. Drift over 24 hours	horizontal: $< 2.8 \times 10^{-2}$ peak-to-peak vertical: $< 2.3 \times 10^{-2}$ peak-to-peak	x	(x)	data are a superposition of relative transverse position and pointing angle fluctuations;
24. 40 Hz to 150 Hz	horizontal: see Fig. 1-1 vertical: see Fig 1-3	(x) x		except near 120 Hz and 195Hz horizontal;
25. > 150 Hz	horizontal: see Fig. 1-2 vertical: see Fig 1-4	(x) x		except near 310 Hz horizontal
26. Polarization extinction ratio	> 10,000:1	x		
27. Electromagnetic interference (EMI) emissions	Built to be in compliance with CE mark, EN 55011 Class A (not tested)	(x)		not tested
Reliability:				
28. Mean time between failure (MTBF)	TBD	?		MO diode current 35.3 % below manufacturer's Iop, PA diode current 13.1 % below manufacturer's Iop
29. Minimum time between required beam alignment adjustment	TBD	?		

2. Configuration

2.1. Configuration Target Specification as per LIGO-E970055-02-D

<i>Parameter</i>	<i>Specification</i>
30. Type of laser	Nd ³⁺ :YAG
31. Wavelength	1064 nm
32. Optical scheme	Master Oscillator Power Amplifier, double-pass
33. Amplifier pumping	8 x 20-W diode bar, direct-coupled, side pumped
Frequency Control:	
34. Thermal tuning range, continuous	10 GHz
35. Thermal tuning range, total	30 GHz
36. Thermal tuning rate	1 GHz/ sec
37. Piezo tuning range, ±15 V	30 MHz
38. Piezo response bandwidth, small signal	> 30 kHz
39. Warm-up time	< 1 hour
Laser head, mechanical:	
40. Support structure	2 ft. x 2 ft., ¼ in.-20 tapped holes on 1 in. square grid
41. Modules/ components	a. Model 126-1064-700 master oscillator b. Power amplifier, sealed c. Coupling and beam control optics
42. Beam height above support structure	TBD ±0.05 in.
43. Cover	Removable dust protective cover, metal
44. Total laser height	< 1 ft.
45. Distance from laser head to power supplies	Up to 50 ft.

Test Report 126 MOPA #102

<i>Parameter</i>	<i>Specification</i>
Laser head, optical:	
46. Output beam waist spot size, w_0	0.25 mm TBD ± 0.1 mm
47. Output beam waist location	TBD ± 50 mm from output aperture
Laser chiller:	
48. Type	Low-temperature, bath circulator
49. Manufacturer, Model	Neslab, RTE-140M
50. Cooling capacity	600 W at 10 °C, at ambient temp. of 20 °C
51. Pumping capacity	0.9 gpm through 100 ft. length of 3/8 in. ID hose
52. Dimensions (h x w x d)	66.0 cm x 31.4 cm x 48.3 cm (> 12 in. clearance at front and rear for ventilation)
53. Distance from laser head to chiller	Up to 50 ft.
54. Distance from chiller microprocessor controller to chiller	Up to 50 ft.
55. Laser safety	In compliance with federal register 21 CFR 1040.10 & 1040.11 laser safety standard
56. Transportability	Transportable by commercial carrier without performance degradation

2.2. 126-MOPA #102 Configuration

Parameter	Configuration	Meets Specification ?		
		Yes	No	Comment
30. Type of laser	Nd ³⁺ :YAG	x		
31. Wavelength	1064 nm	x		
32. Optical scheme	Master Oscillator Power Amplifier, double-pass	x		
33. Amplifier pumping	8 x 20-W diode bar, direct-coupled, side pumped	x		
Frequency Control:				
34. Thermal tuning range, continuous	10 GHz	x		
35. Thermal tuning range, total	30 GHz	x		
36. Thermal tuning rate	1 GHz/ sec	x		
37. Piezo tuning range, ±10 V	DC: 5.3 MHz/V AC: 5.1 MHz/V	x		
38. Piezo response bandwidth, small signal	> 30 kHz	x		
39. Warm-up time	< 1 hour	x		
Laser head, mechanical:				
40. Support structure	2 ft. x 2 ft., ¼ in.-20 tapped holes on 1 in. square grid	x		
41. Modules/ components	a. Model 126-1064-700 master oscillator b. Power amplifier, sealed c. Coupling and beam control optics	x		
42. Beam height above support structure	2.35 in. ±0.05 in.	x		
43. Cover	Removable dust protective cover, metal	x		
44. Total laser height	8.2 in. ±0.2 in.	x		
45. Distance from laser head to power supplies	Up to 50 ft.	x		

Test Report 126 MOPA #102

Parameter	Configuration	Meets Specification ?		
		Yes	No	Comment
Laser head, optical:				
46. Output beam waist spot size, w_0	horizontal: 0.19 mm \pm 0.1 mm vertical: 0.23 mm \pm 0.1 mm	x		
47. Output beam waist location	horizontal: +8 mm \pm 20 mm from output aperture (outside laser) vertical: -28 mm \pm 20 mm from output aperture (inside laser)	x		
Laser chiller:				
48. Type	Low-temperature, bath circulator	x		
49. Manufacturer, Model	Neslab, RTE-140M	x		
50. Cooling capacity	600 W at 10 °C, at ambient temp. of 20 °C	x		
51. Pumping capacity	0.9 gpm through 100 ft. length of 3/8 in. ID hose	x		
52. Dimensions (h x w x d)	66.0 cm x 31.4 cm x 48.3 cm (> 12 in. clearance at front and rear for ventilation)	x		
53. Distance from laser head to chiller	Up to 50 ft.	x		
54. Distance from chiller microprocessor controller to chiller	Up to 50 ft.	x		
55. Laser safety	In compliance with federal register 21 CFR 1040.10 & 1040.11 laser safety standard	x		
56. Transportability	May require minor realignment when transported by commercial carrier		x	

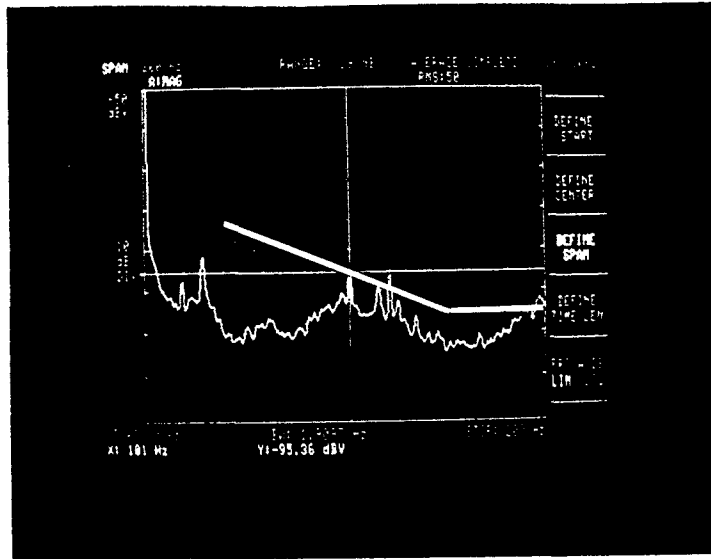


Fig. 1-1. Beam relative pointing angle and transverse position fluctuations, horizontal component, 0 - 200 Hz. The thick white line shows specifications 21 and 22 of LIGO-E970055-02-D in units dBVolt.

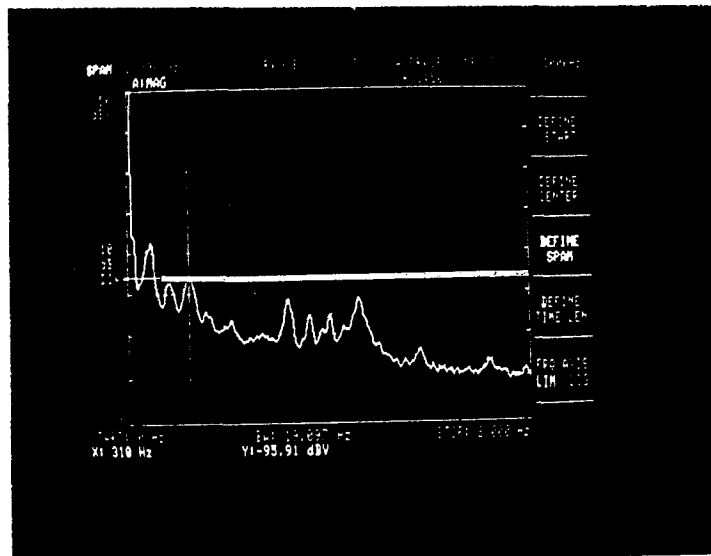


Fig. 1-2. Beam relative pointing angle and transverse position fluctuations, horizontal component, 0 - 2000 Hz. The thick white line shows specifications 21 and 22 of LIGO-E970055-02-D in units dBVolt.

