



The GEO600 detector: Status and Plans




Stefan Hild (AEI Hannover)
for the GEO-Collaboration

LIGO-G070172-00-Z

Leibniz
Universität Hannover 

 UNIVERSITY OF
BIRMINGHAM




 **Universitat de les
Illes Balears**

 **CARDIFF
UNIVERSITY**



- **The GEO600 detector**
- **Participation / Performance in S5**
- **Recent efforts**
 - gain understanding of detector
 - improving the detector / reduction of glitches
 - necessary maintenance work
 - test mass discharging
- **Plans for the future**


The GEO600 Interferometer

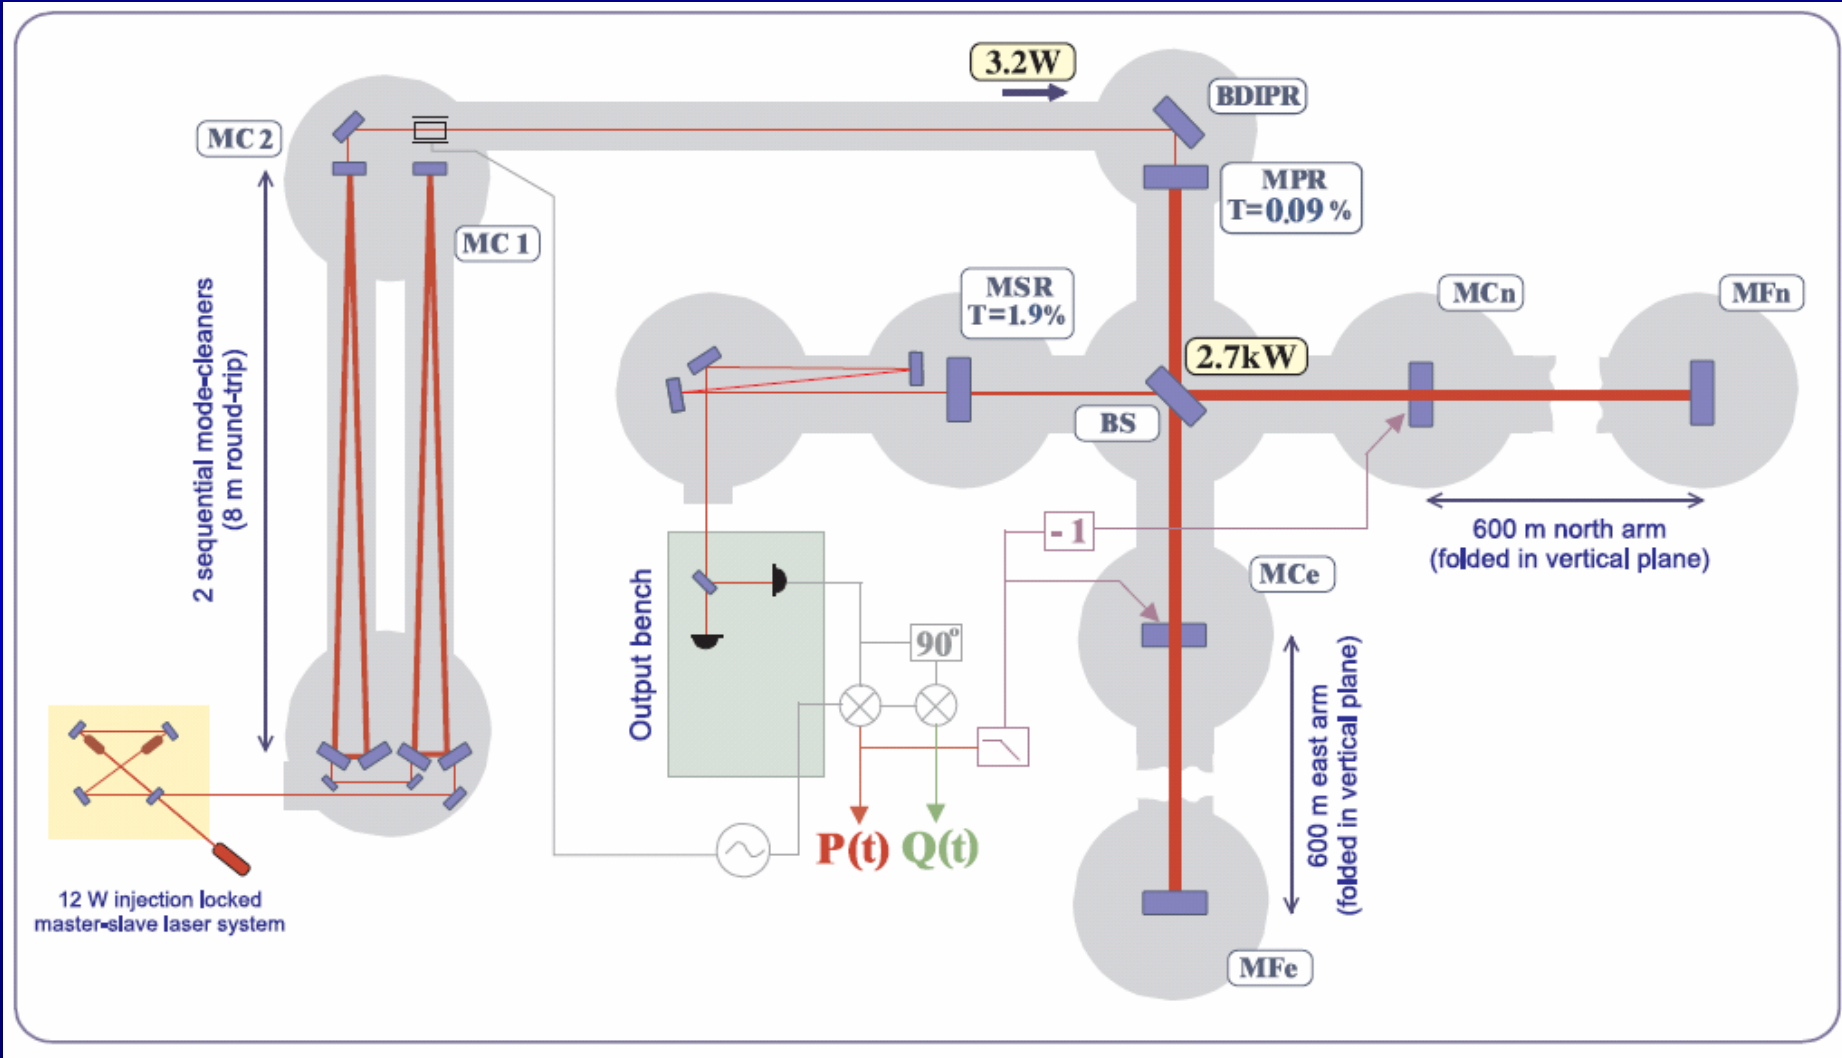

The GEO600 Interferometer

No arm cavities, but folded arms:


- High PR factor (~1000)
- High power in BS substrate (~kW)
- Very low absorption of BS substrate (< 0.25 ppm/cm)

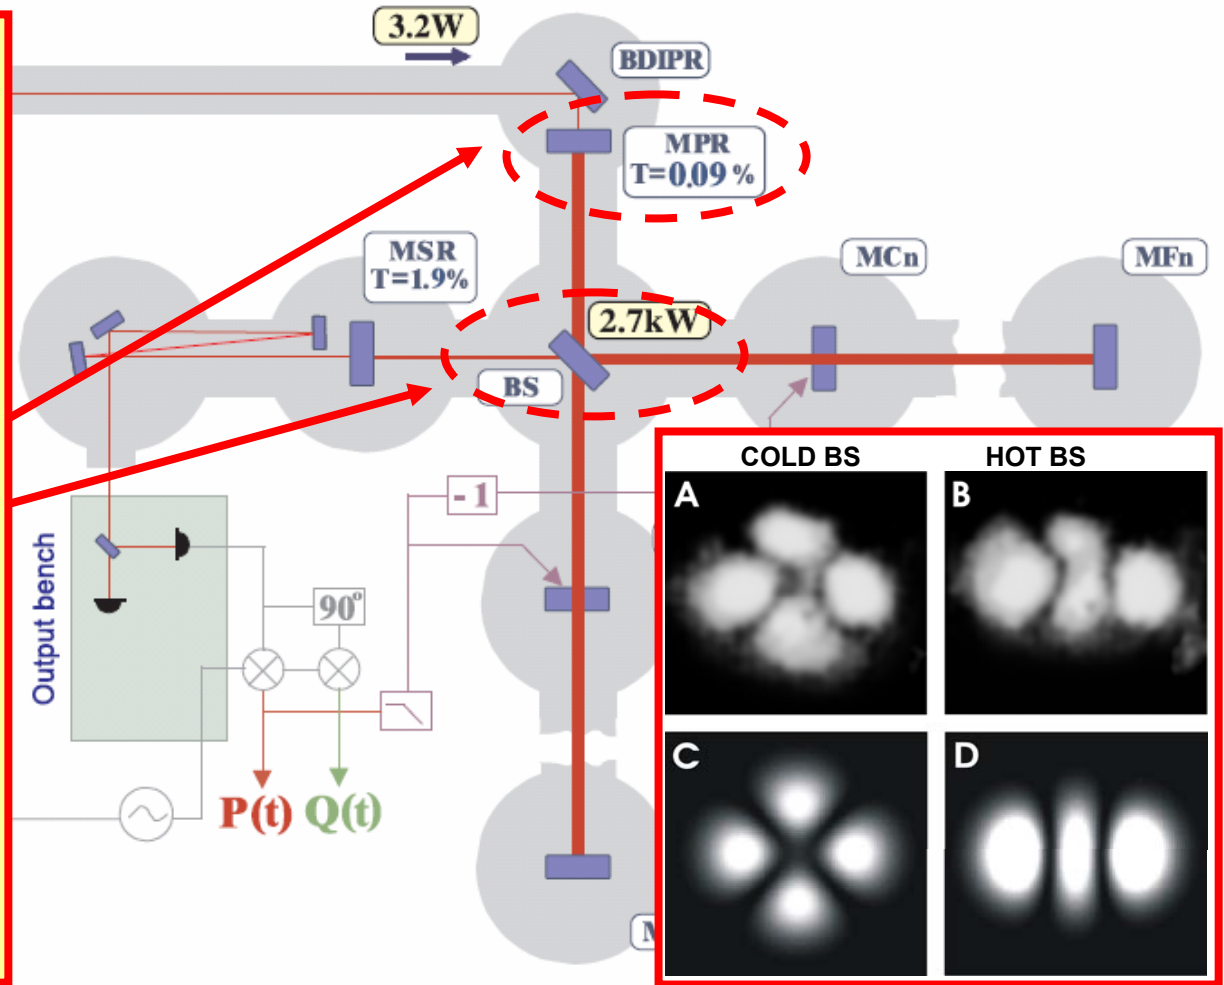


The GEO600 Interferometer



Triple suspensions:

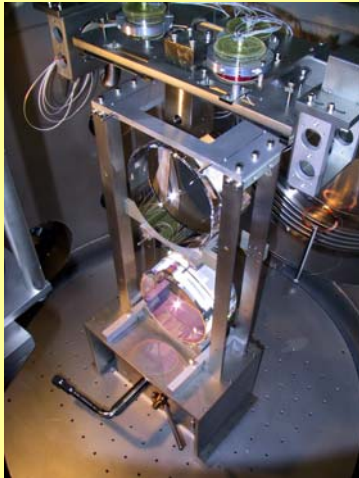


- Monolithic stages
- Split-feedback (3 stage hierarchical control)

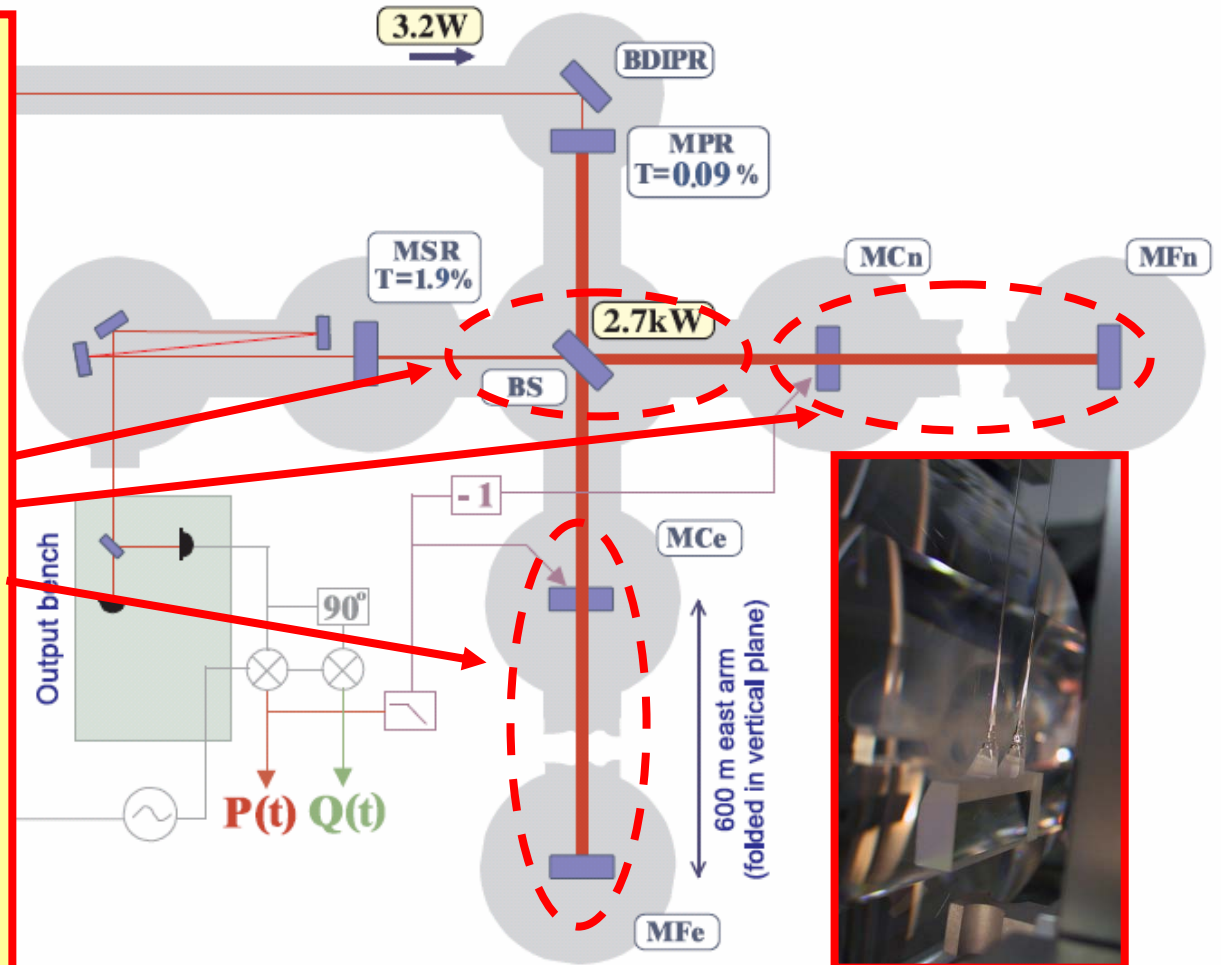


Electro-Static Drives:

- Used for fast control of diff. armlength

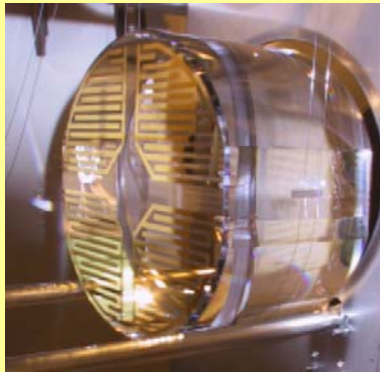


- Near future: also used for autoalignment.

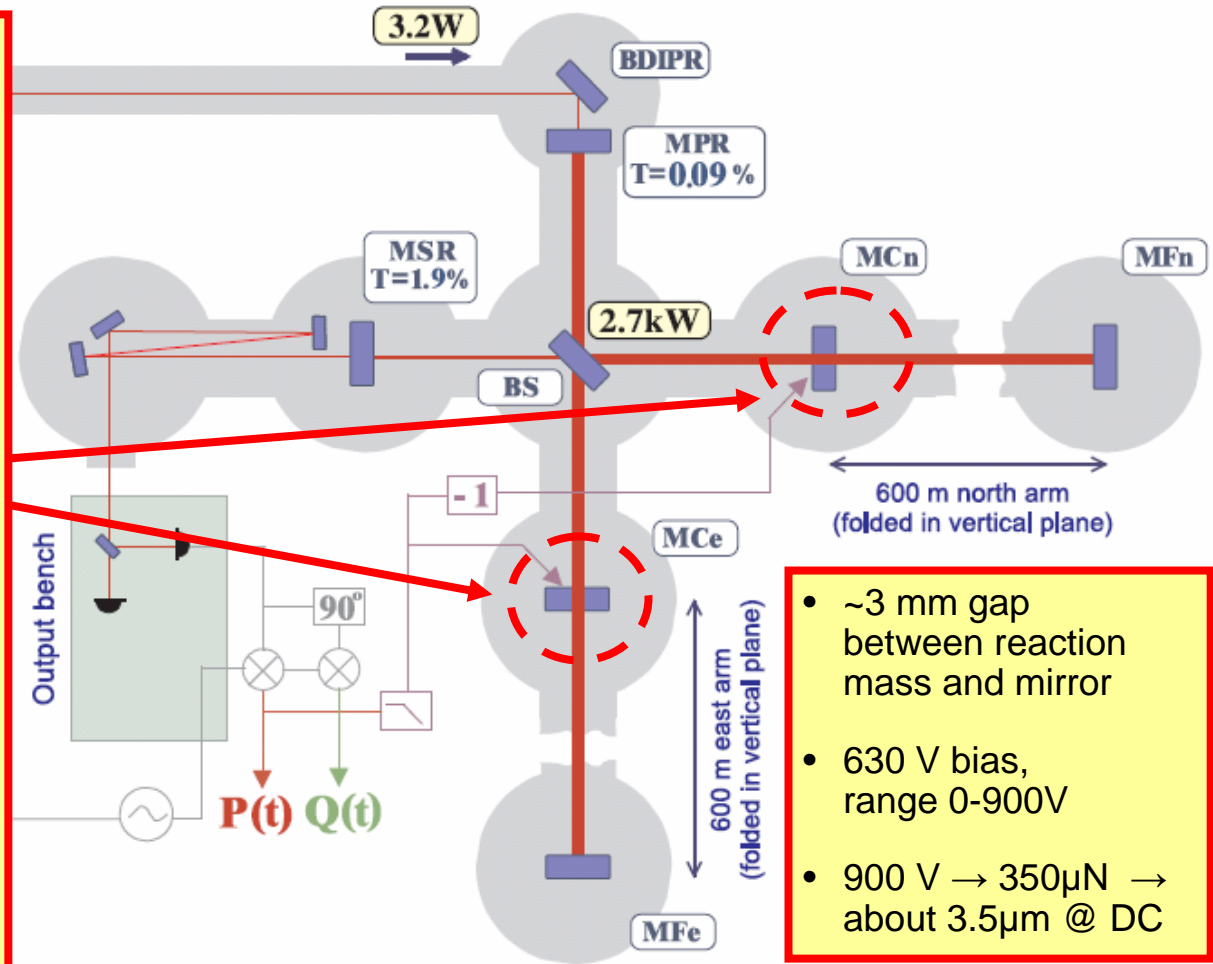

- ~3 mm gap between reaction mass and mirror
- 630 V bias, range 0-900V
- 900 V → 350μN → about 3.5μm @ DC

Signal-Recycling:


- Shaping detector response
- Complicated detector (resonance conditions with detuned SR)
- GW signal is spread over both quadratures P and Q .

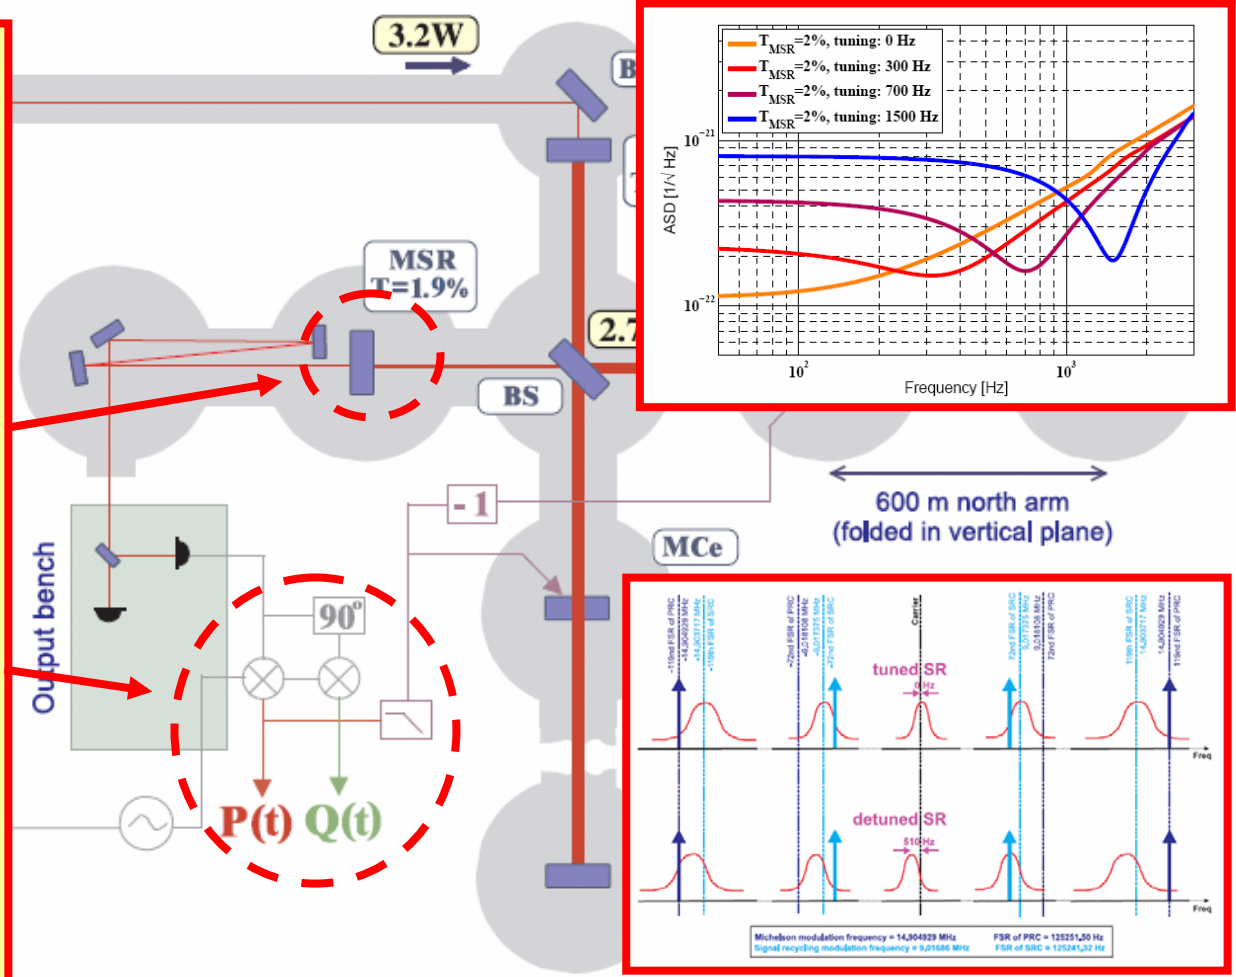



Most of 2006 GEO600 participated in S5.

O&WE-mode 1:
20th January – 1st May
Science time = 46.5%

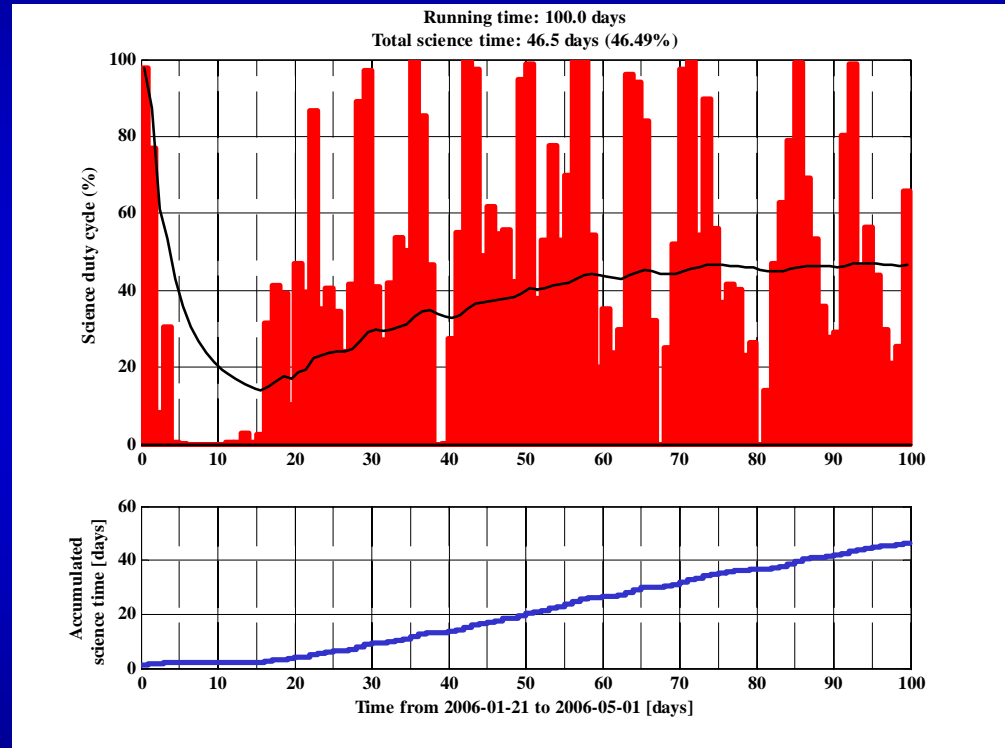



Most of 2006 GEO600 participated in S5.

O&WE-mode 1:


20th January – 1st May

Science time = 46.5%

24/7:

1st May – 16th October

Science time = 90.7%

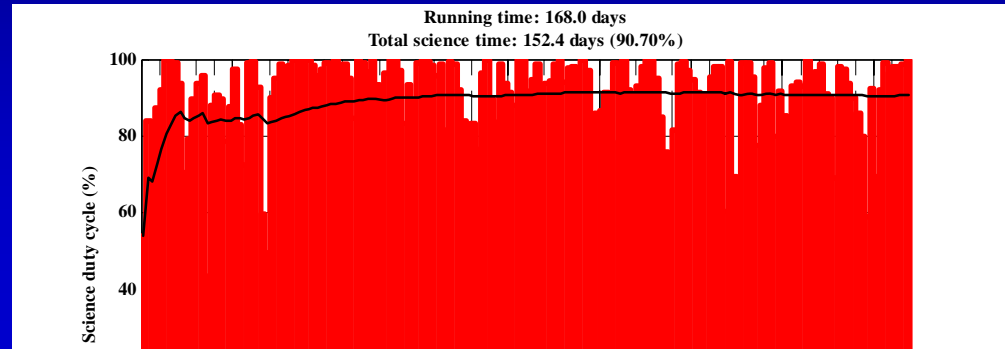

Strategic Decision @ October GEO-meeting:

- **Input:** LSC data analysis groups, LSC operations committee, Benefit/Risk-analysis from commissioning team.
- **Result:** O&WE-mode period 2
 - Gain understanding of the detector
 - Improving GEO600
 - Maintenance work required to prepare GEO for a long science run in 2008




Most of 2006 GEO600 participated in S5.


O&WE-mode 1:
 20th January – 1st May
 Science time = 46.5%

24/7:
 1st May – 16th October
 Science time = 90.7%

O&WE-mode 2:
 16th October – 1st February 2007
 Science time = 51.1%

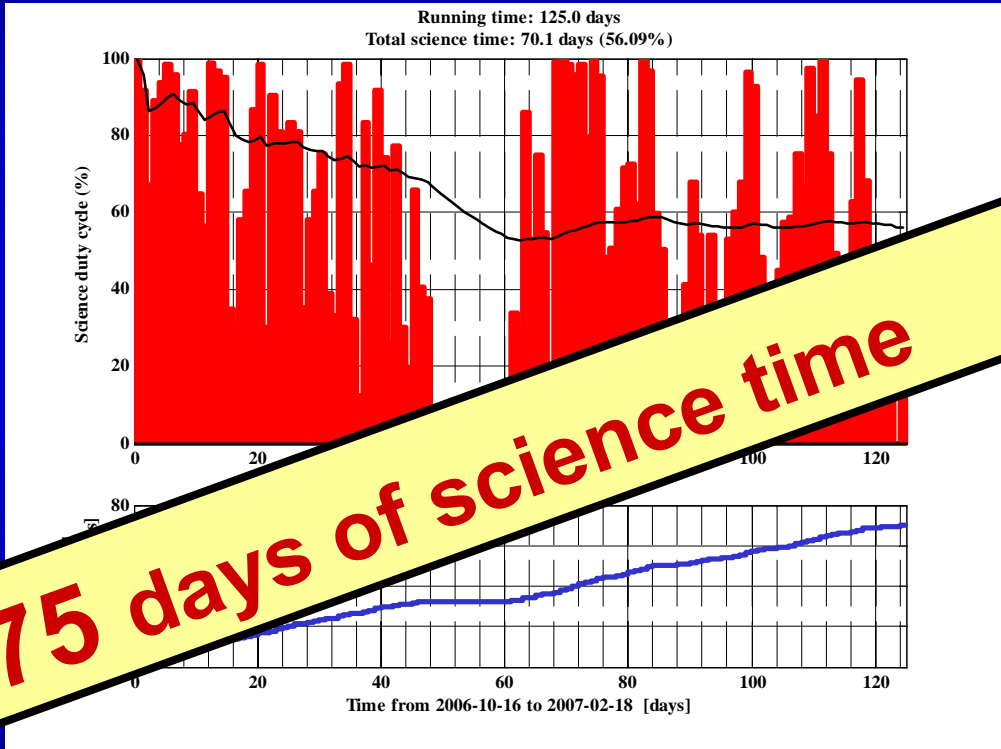


Strain sensitivity of LSC IFOs in S5

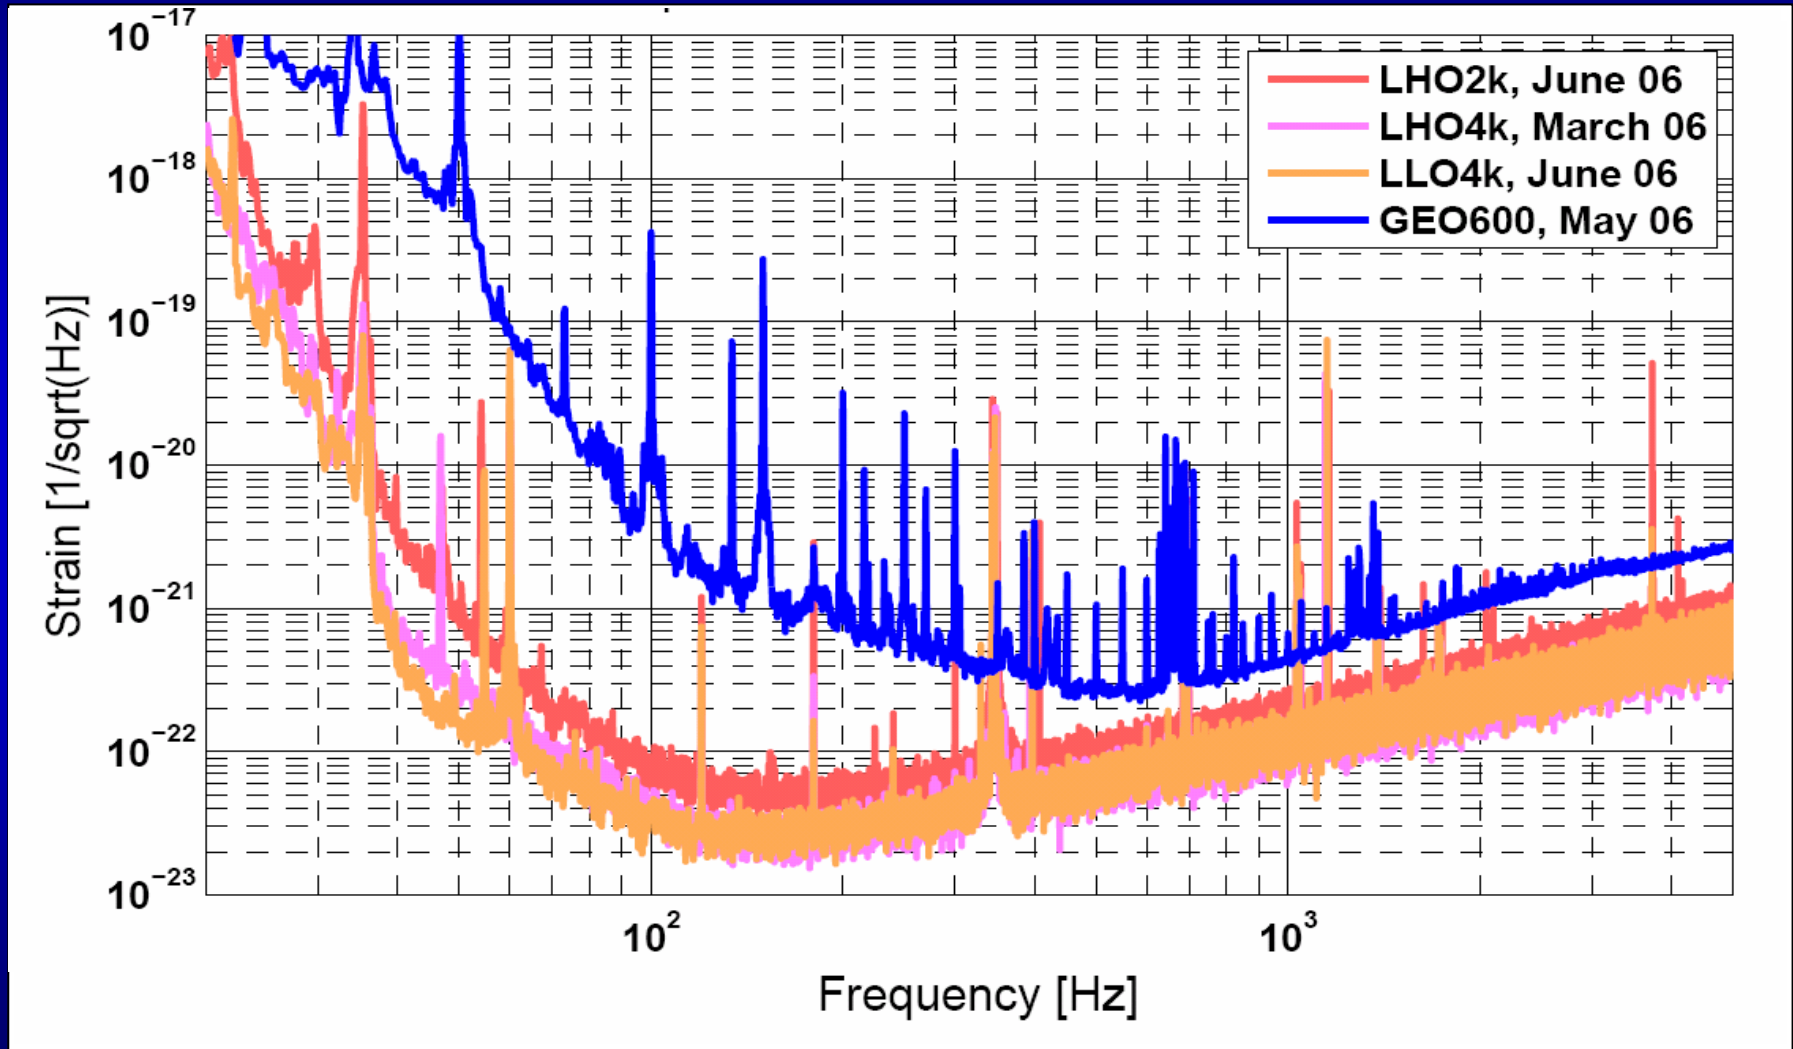




Displacement sensitivities in S5

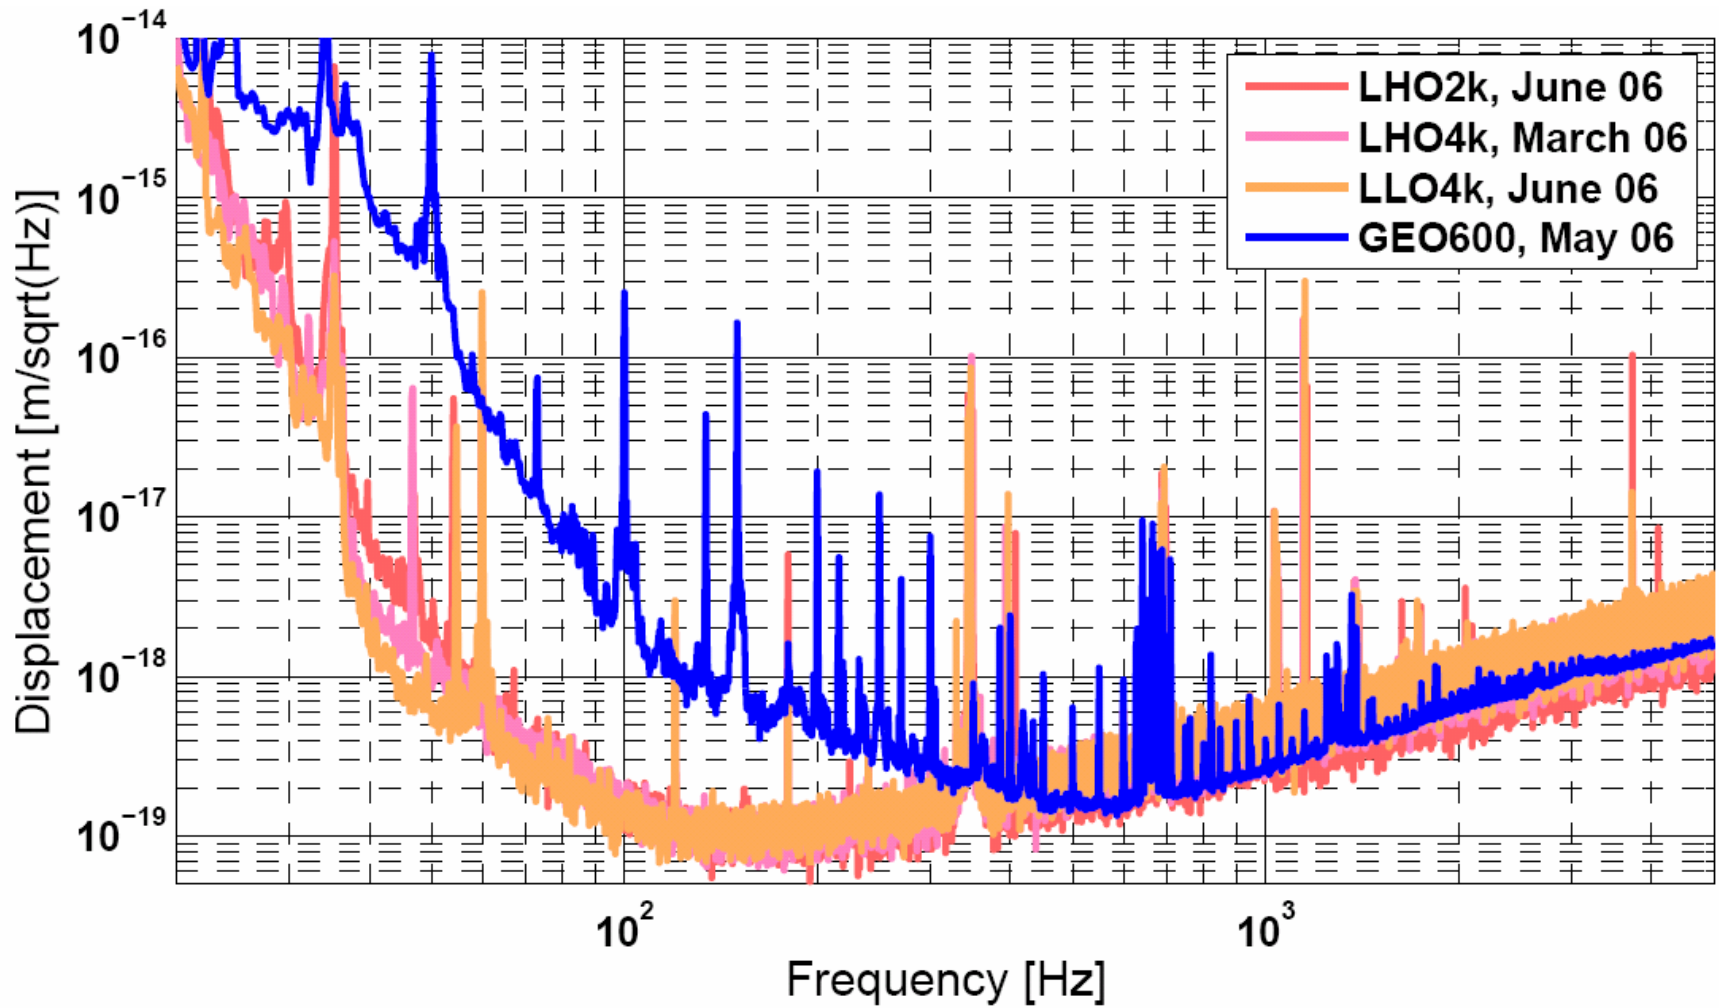




Detector stability in S5


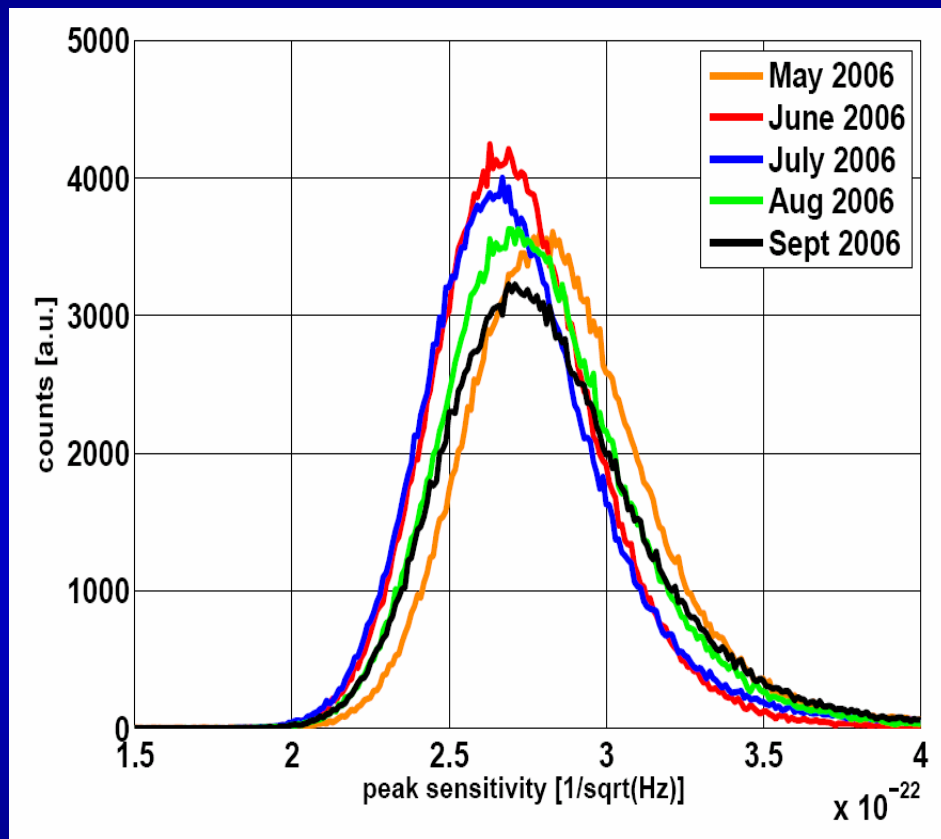


Average peak sensitivity better than $3e-22/\text{sqrt}(\text{Hz})$

Lots of DC info available.

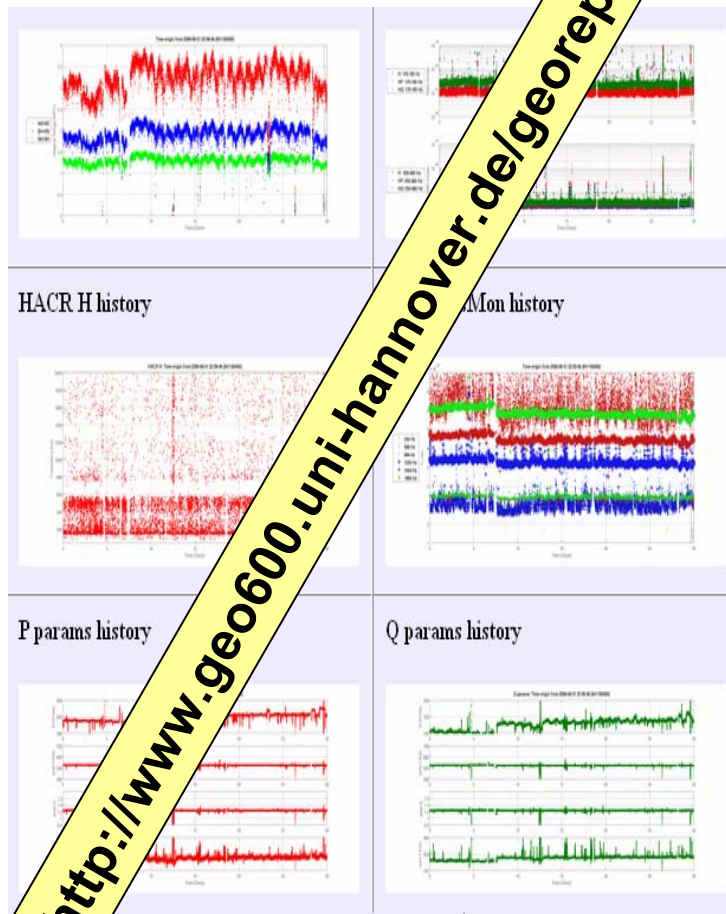

Glitches and vetoes

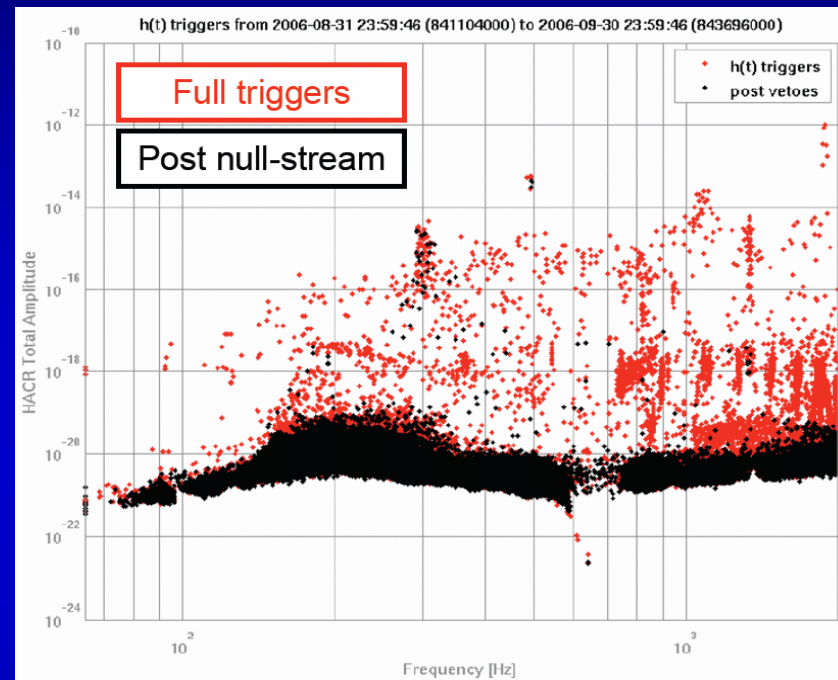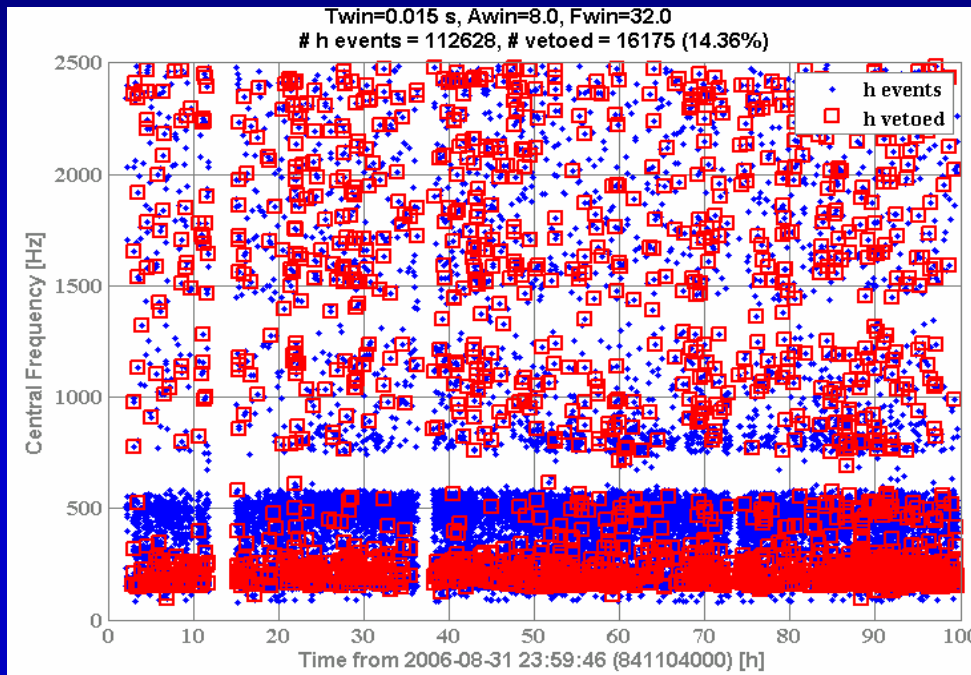

- Nullstream veto
- Chi² veto
- Noise projection vetos
- Statistical vetos

M Hewitson et al: Using the null-stream of GEO 600 to veto transient events in the detector output, CQG 22 No 22, 4903-4912

M Hewitson: Detector and data characterisation at GEO 600, in preparation

P Ajith et al: Robust vetoes for gravitational-wave burst triggers using known instrumental couplings, CQG 23 No 20, 5825-5837

S Hild et al: A statistical veto employing an amplitude consistency check, submitted to CQG



- **The GEO600 detector**

- **Participation / Performance in S5**

- **Recent efforts**

- gain understanding of detector
- improving the detector / reduction of glitches
- necessary maintenance work
- test mass discharging


- **Plans for the future**



Improved understanding of the detector: Laser power noise coupling



Laser power noise TFs using FINESSE match our measurements.



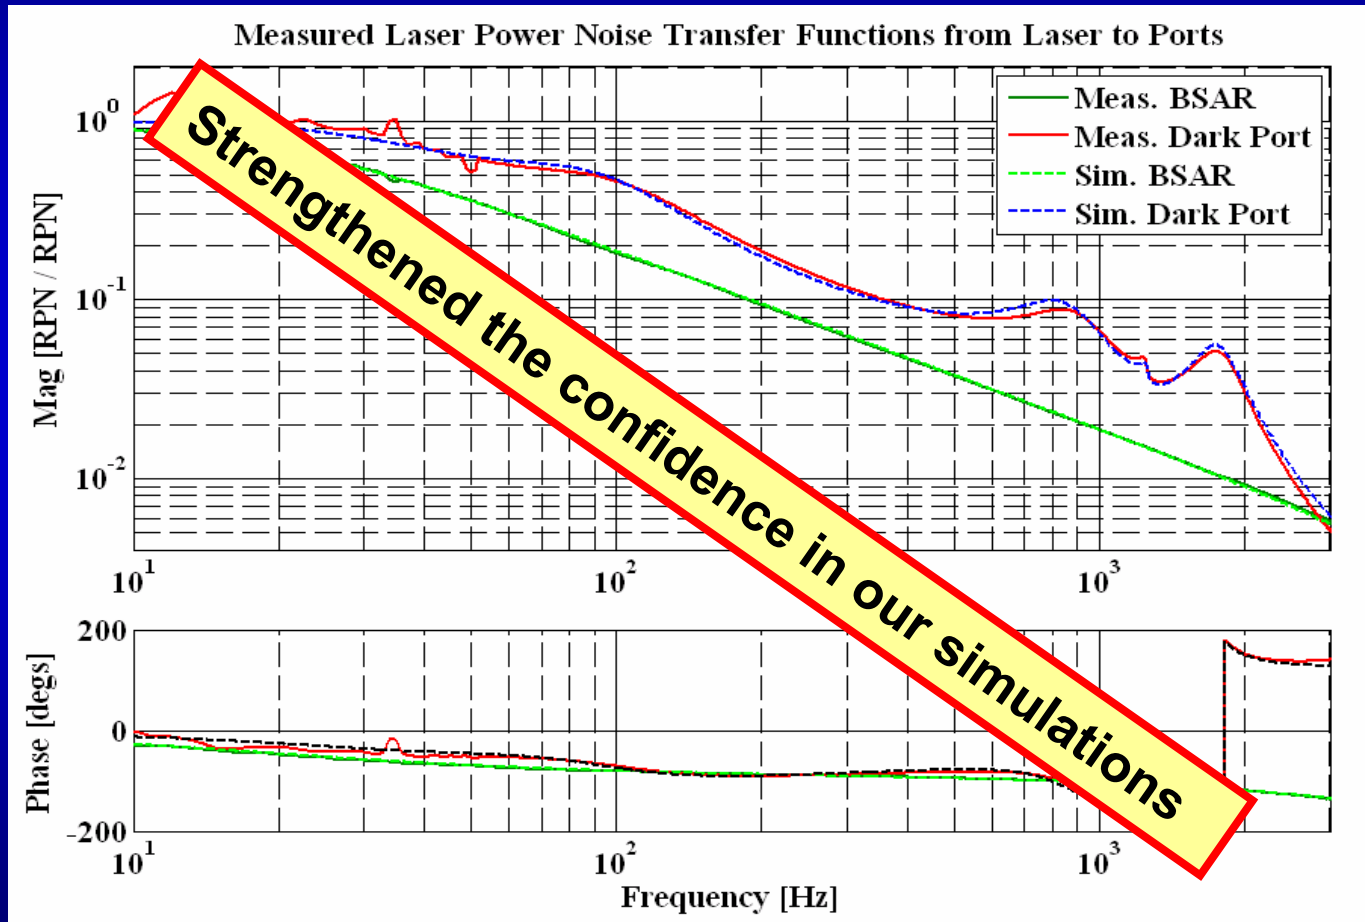


"Laser power noise coupling in GEO600", JR Smith, A Freise, H Grote, M Hewitson, S Hild, H Lück, KA Strain, B Willke, in preparation

Installation of mains filter




- Found many glitches in GW signal at hour boundary (10 sec after)
- Coincident events in mains monitors
- Control signals created by power companies.
- Solution: Installation of mains filter.

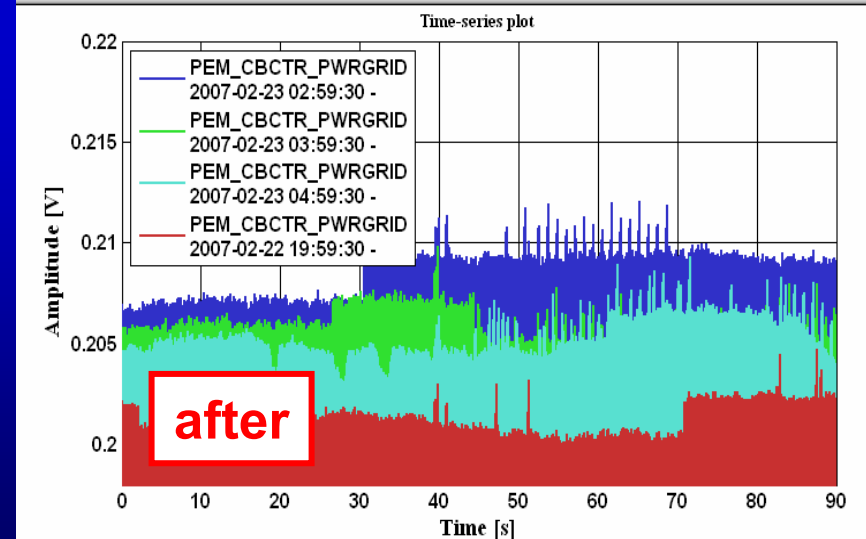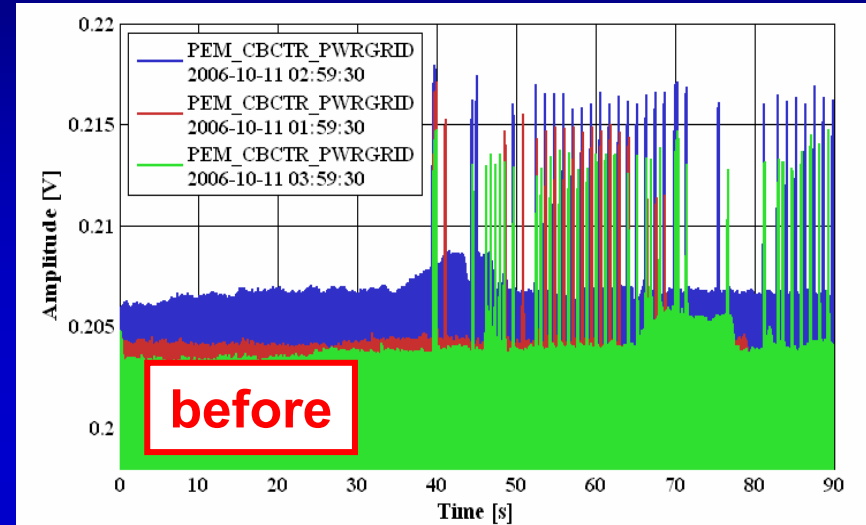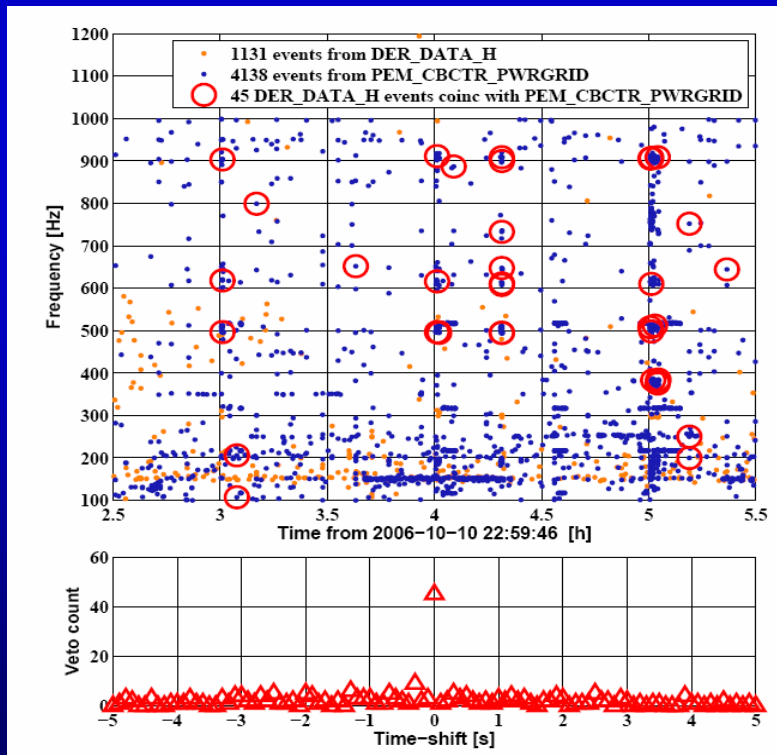




Reduction of particle concentration in the cleanroom

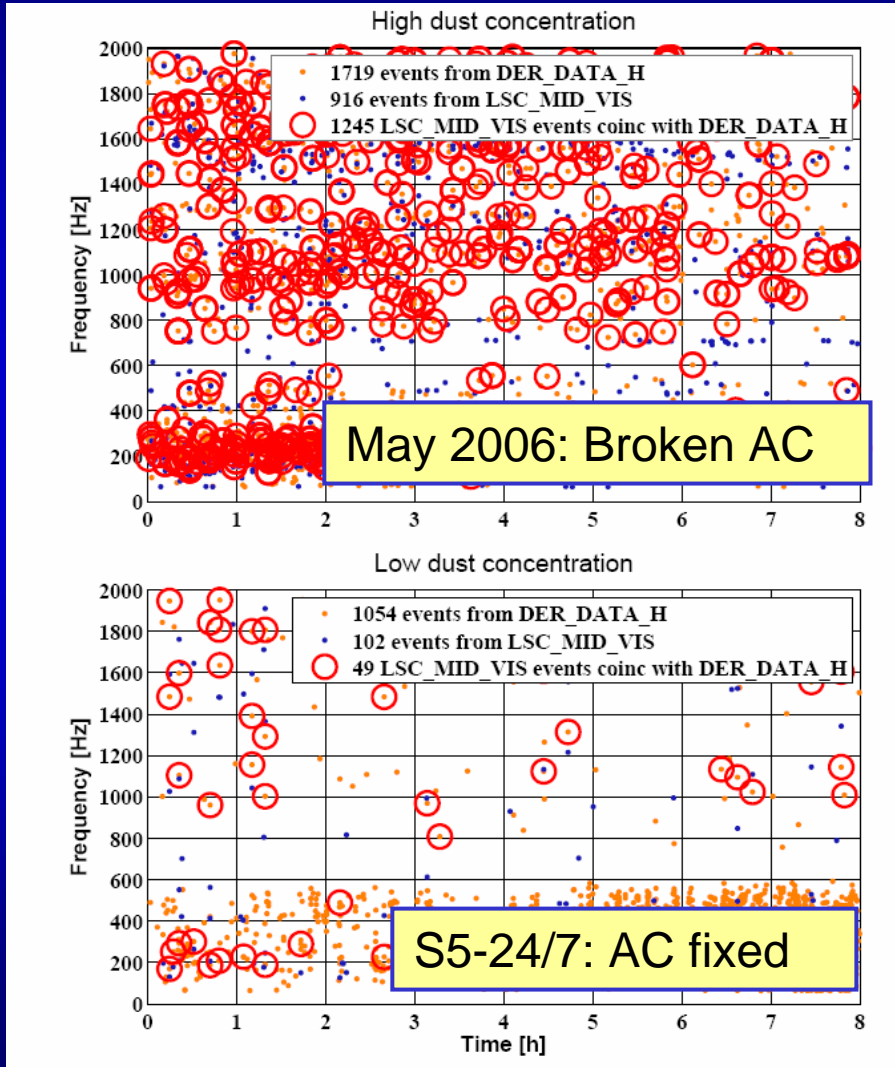

Glitches caused by dust falling through the laser beam in front of main photo diode.


(veto available for dust glitches)

January 2007:
Improved dust filtering

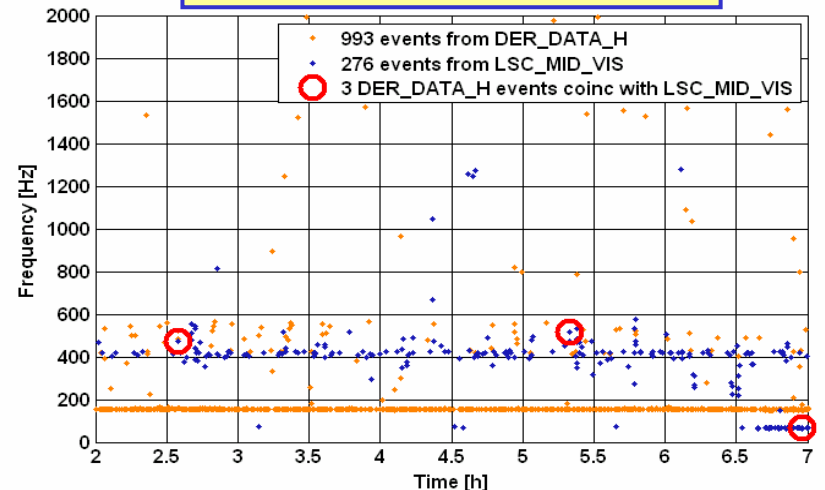



Exchanged HV-feedthroughs

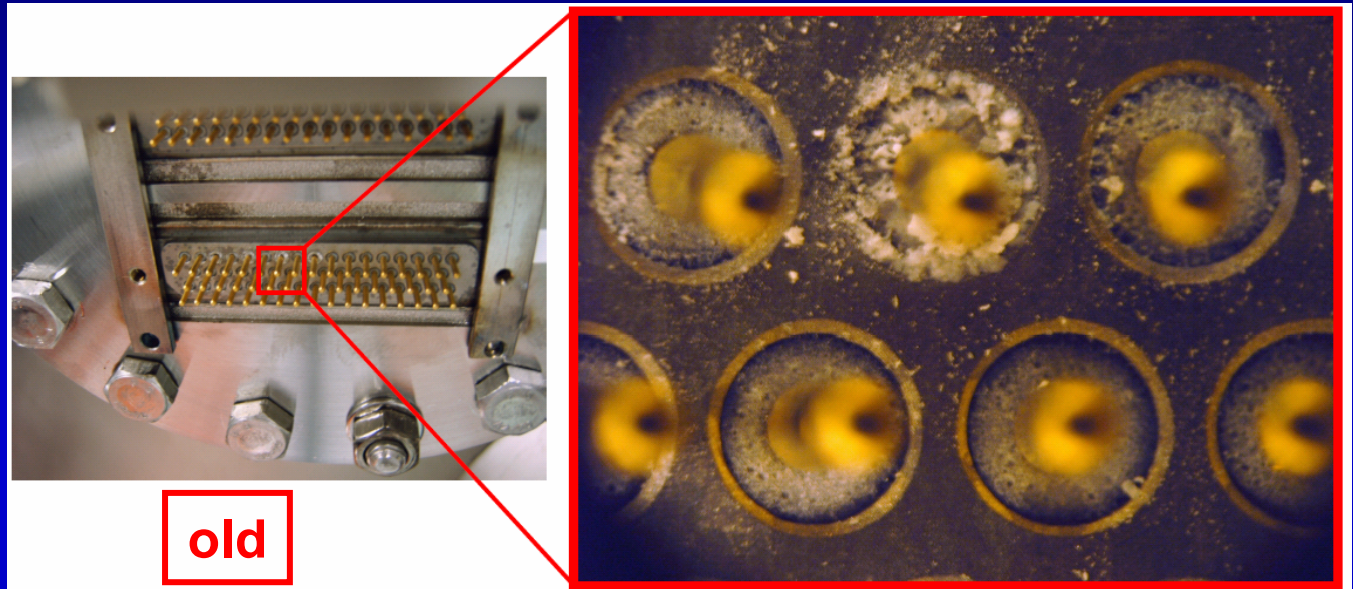

Installation in March 2001

Failed due to corrosion in August 2004


Since then using the spares !!

Replaced in February 2007






Fixed beam clipping inside Signal-Recycling cavity

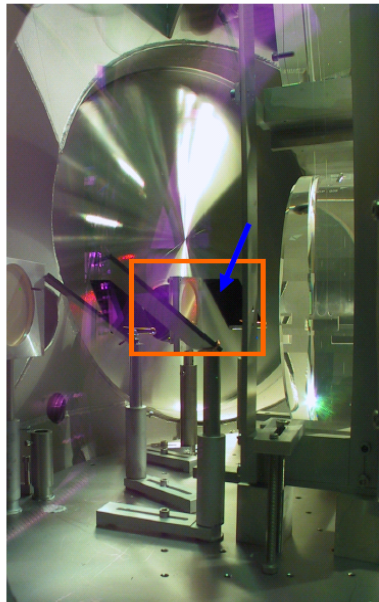

Suspect the beam dump to clip the beam (blue arrows)



old

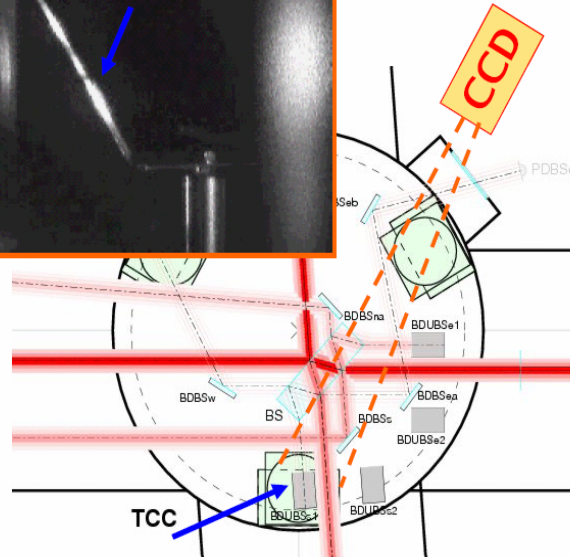

new



Solution:
Beam dump on translation stage



- Piezo actuator
- Range of 28 mm
- Load: up to few 100g



Charges on test masses after vacuum work

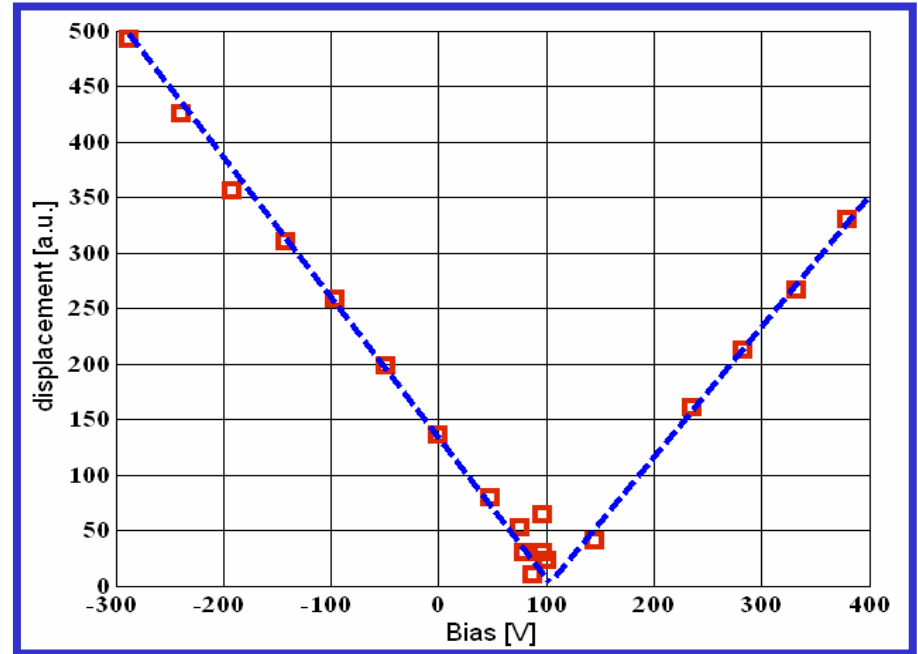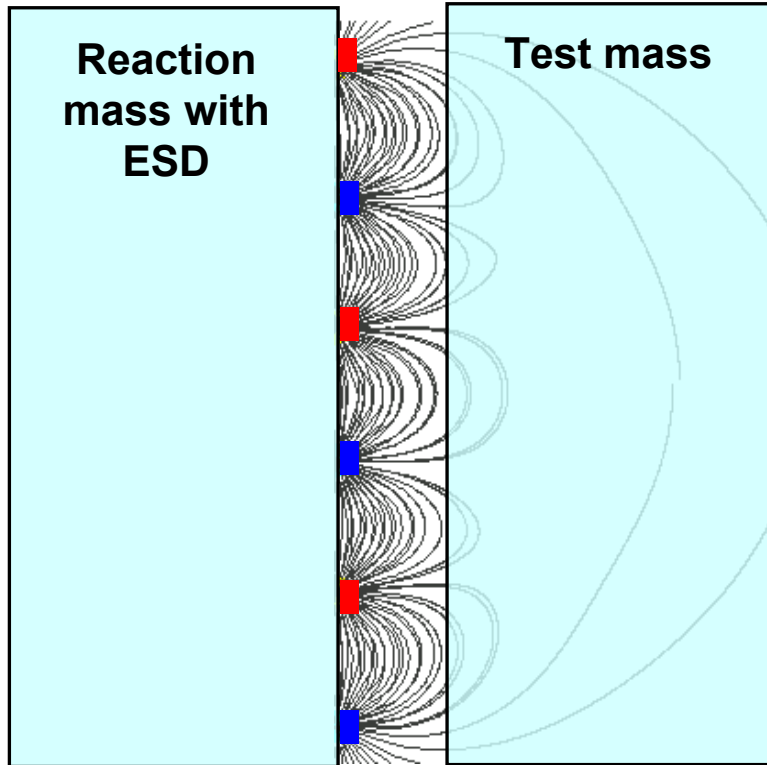

$$\begin{aligned}
 \mathbf{F} &= U^2 \epsilon_0 \epsilon_r \mathbf{d}^{3/2} \mathbf{A} = (U_{\text{bias}} + U_{\text{signal}})^2 \cdot \text{const} \\
 &= \mathbf{F}_{\text{Offset}} + U_{\text{bias}} \cdot U_{\text{signal}} \cdot \text{const} + U_{\text{signal}}^2 \cdot \text{const}
 \end{aligned}$$

After the vacuum work we found the test masses to be charged (+100V/+30V)

Uncharching test mass by UV light






*S. Rowan et al, CQG.
14 1537–1541 (1997):*

**Discharging by
use of UV light to
free electrons.**

In our case:

- UV transmitted through test mass
- electrons are freed of the ESD electrodes
- electrons compensate positive charge on test mass

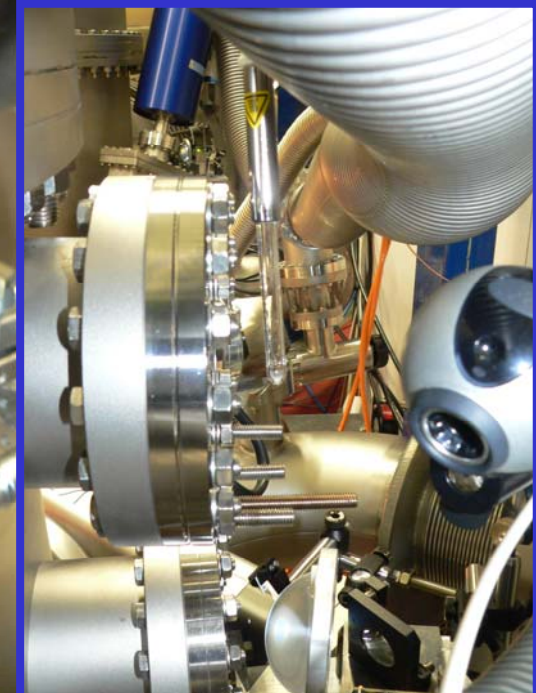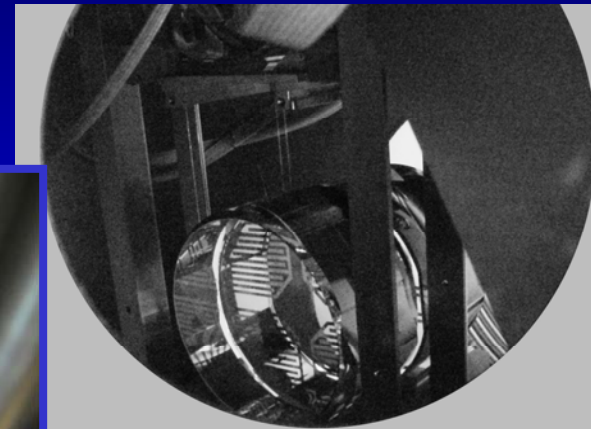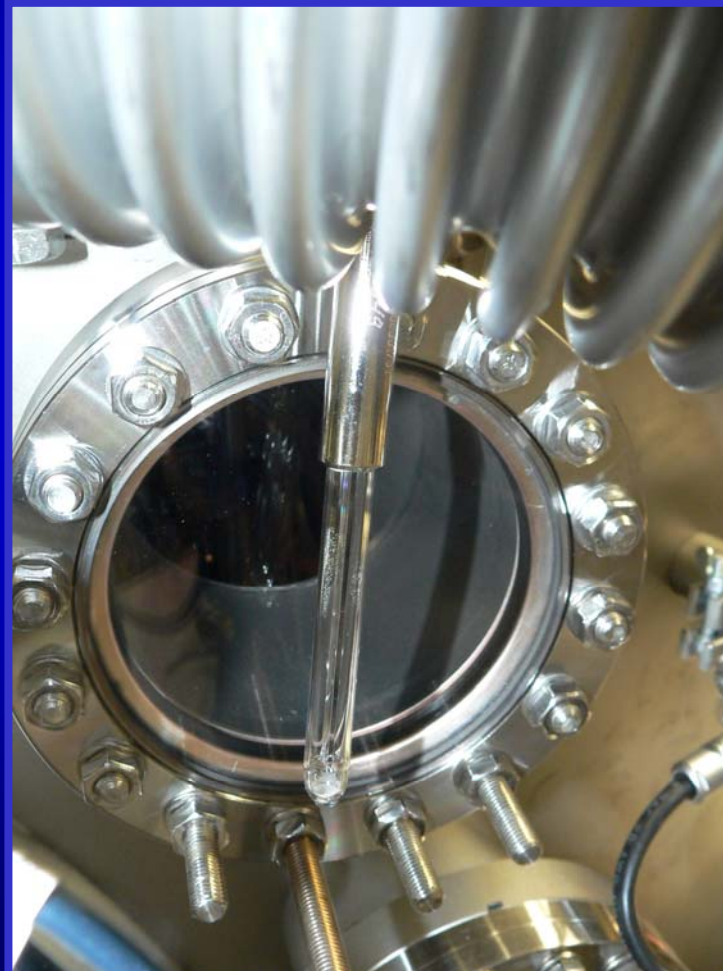





Successfully discharged the test masses



BEFORE

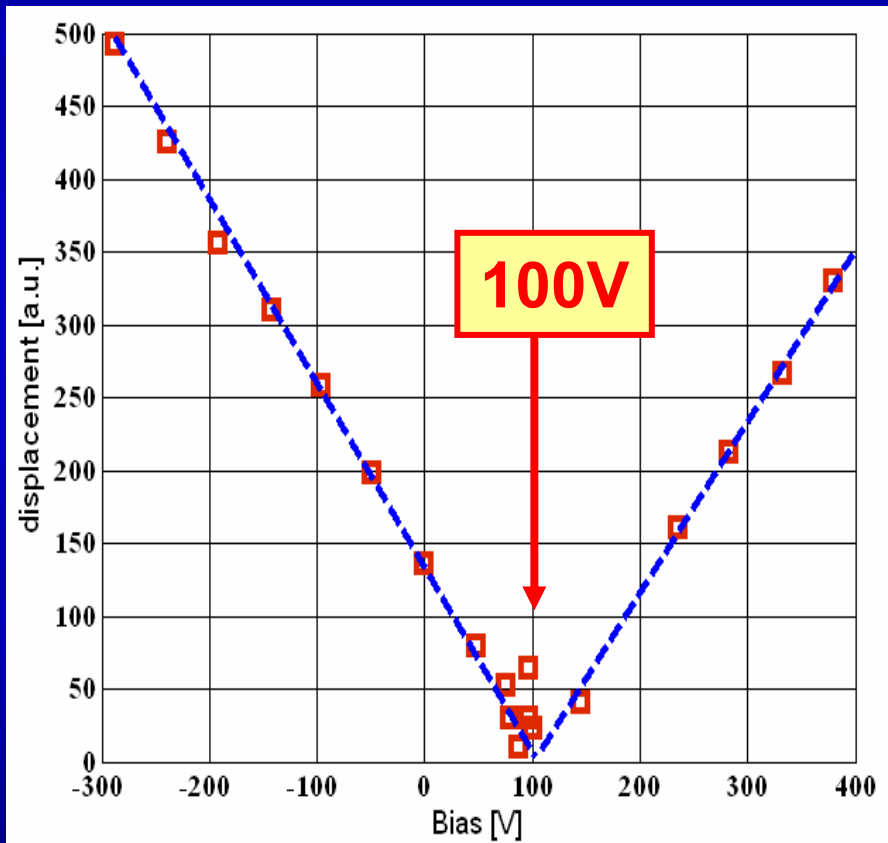


AFTER

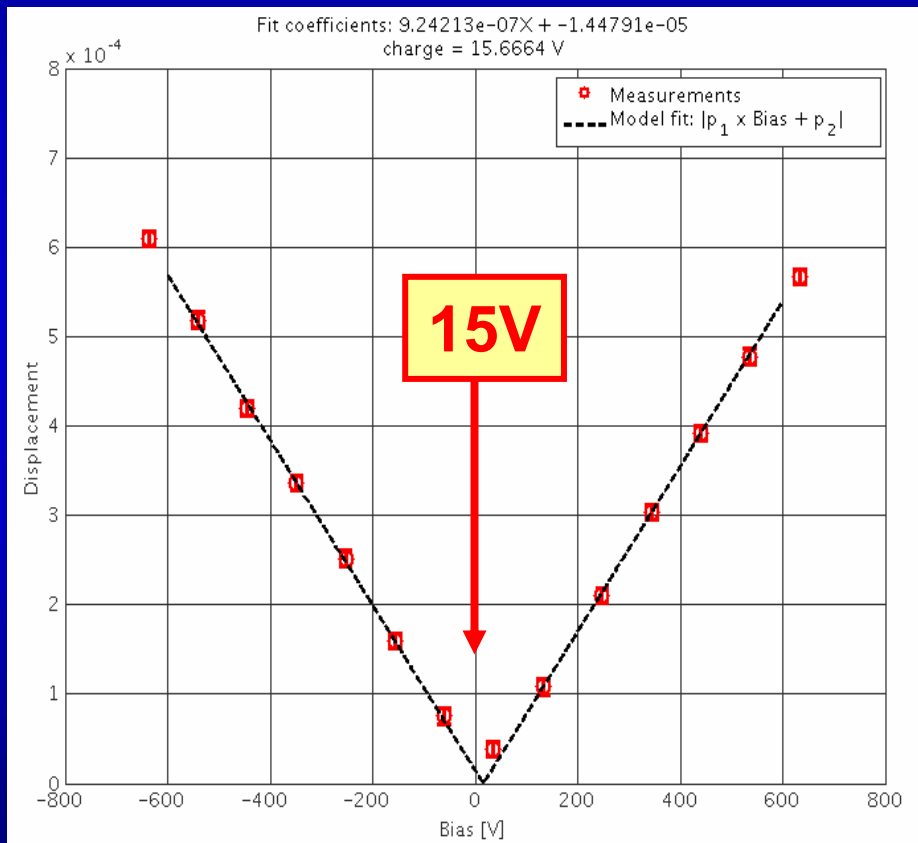



Noise projections

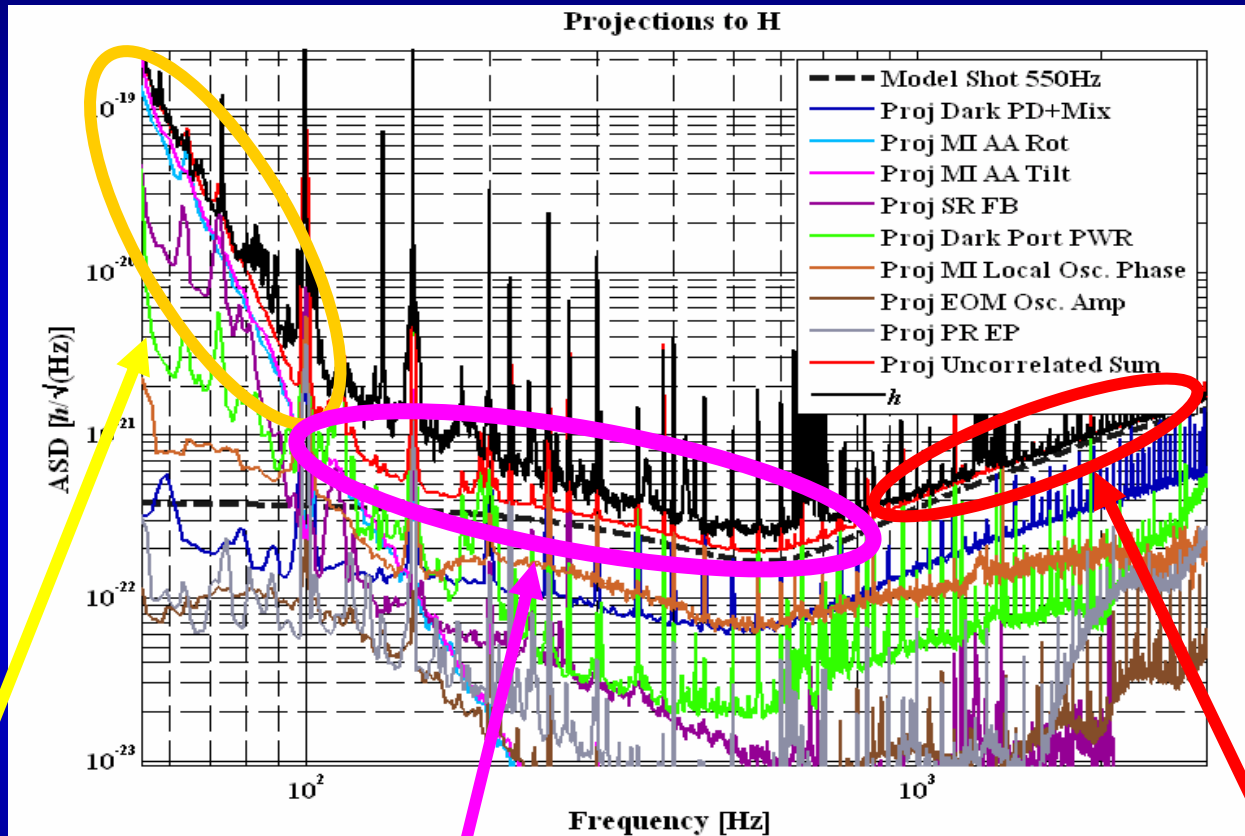

Feedback noise
 ⇒ ESD for fast AA

unexplained
 ⇒ Strong indication for scattering
 ⇒ larger viewports in the endstations

Shot noise
 ⇒ Increase light power




- **The GEO600 detector**
- **Participation / Performance in S5**
- **Recent efforts**
 - gain understanding of detector
 - improving the detector / reduction of glitches
 - necessary maintenance work
 - test mass discharging

● **Plans for the future**



Different SR-tunings

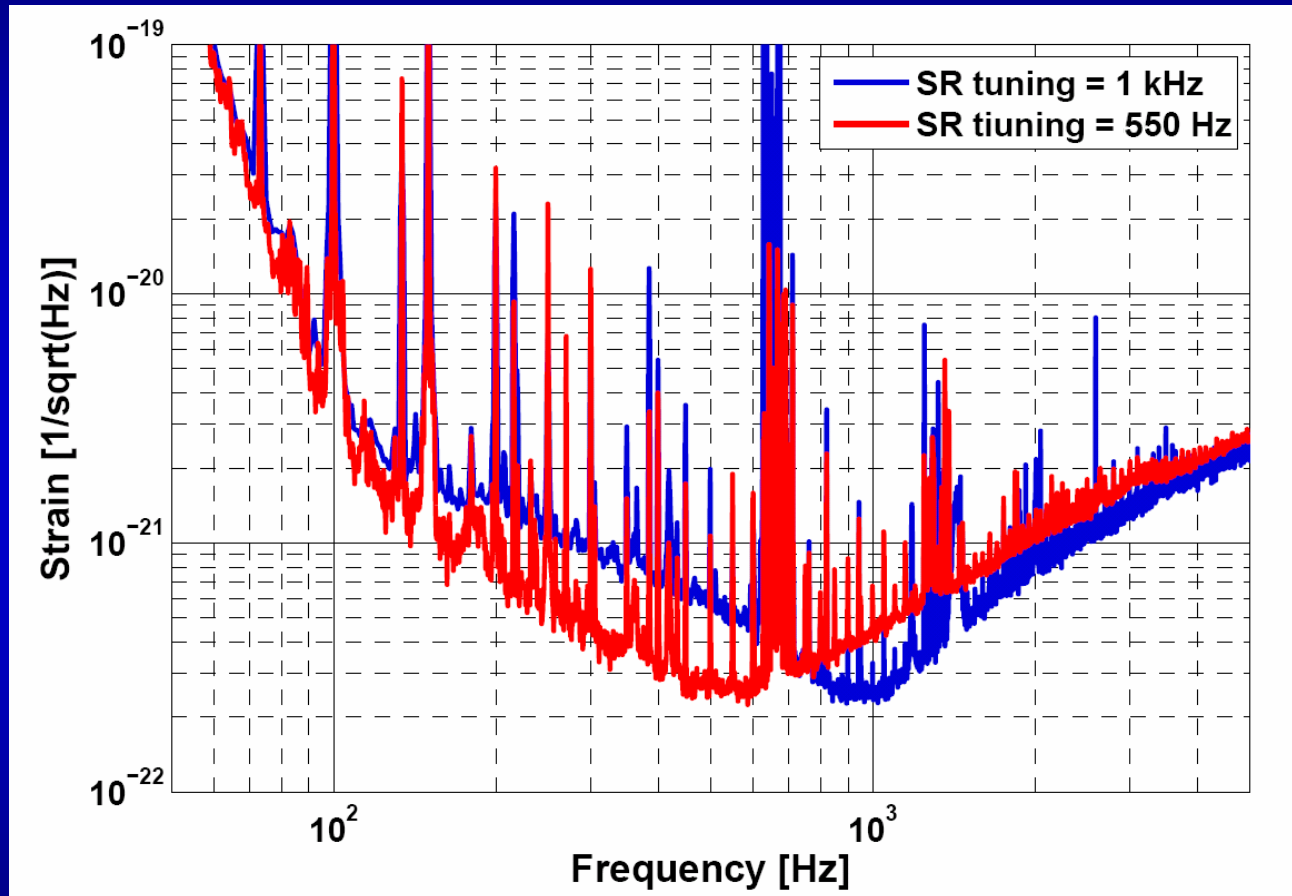


Peak sensitivity better than $3e-22/\text{sqrt}(\text{Hz})$ for both tunings.



SR tuning of 1kHz



Around 1kHz GEO600 is about a factor 2 worse than the LIGO 4km Instruments.

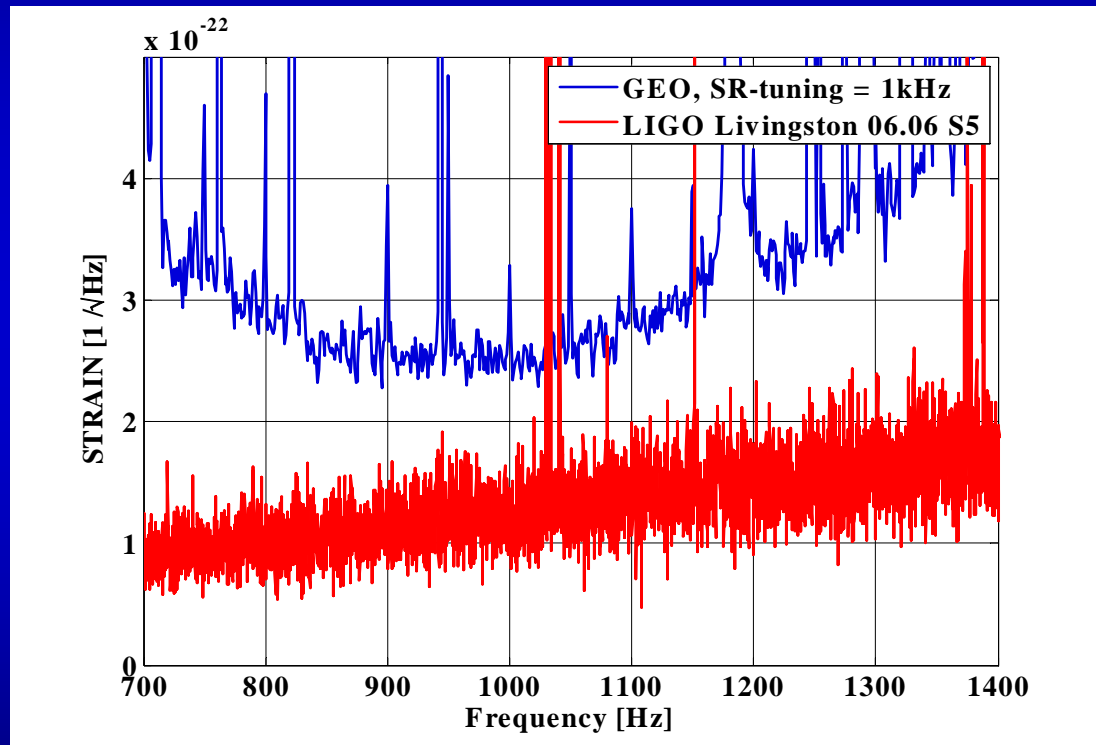


Consider to use this tuning in the near term in order to improve the science impact of GEO600.



IDEA:

- Turning down the RF-modulation (*factor 10 is possible*)
 - Using an offset from dark fringe (*of the order of 50pm*)
- ⇒ Dark port dominated by carrier light

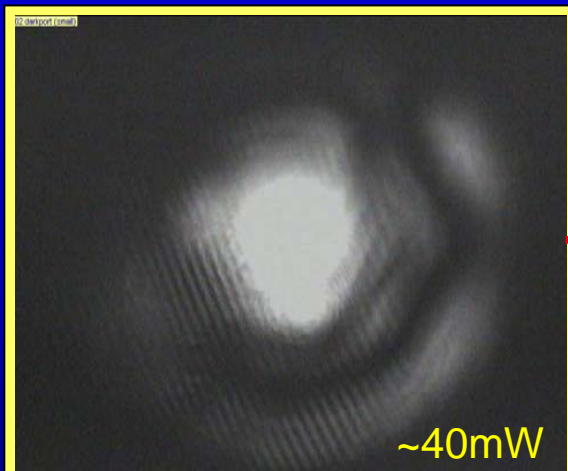

Nominal heterodyne



Heterodyne with only 10% modulation




Offset to dark fringe (~ 50pm)



Results from first Experiments with DC-readout




- Stable interferometer with reduced modulation and dark fringe offset:
 - Locking with heterodyne signal, readout with DC signal
 - Locking with DC (homodyne) signal, readout with DC signal
- Above 1kHz a sensitivity competitive to heterodyne readout is achieved
- So far no optimisation or noise hunting took place

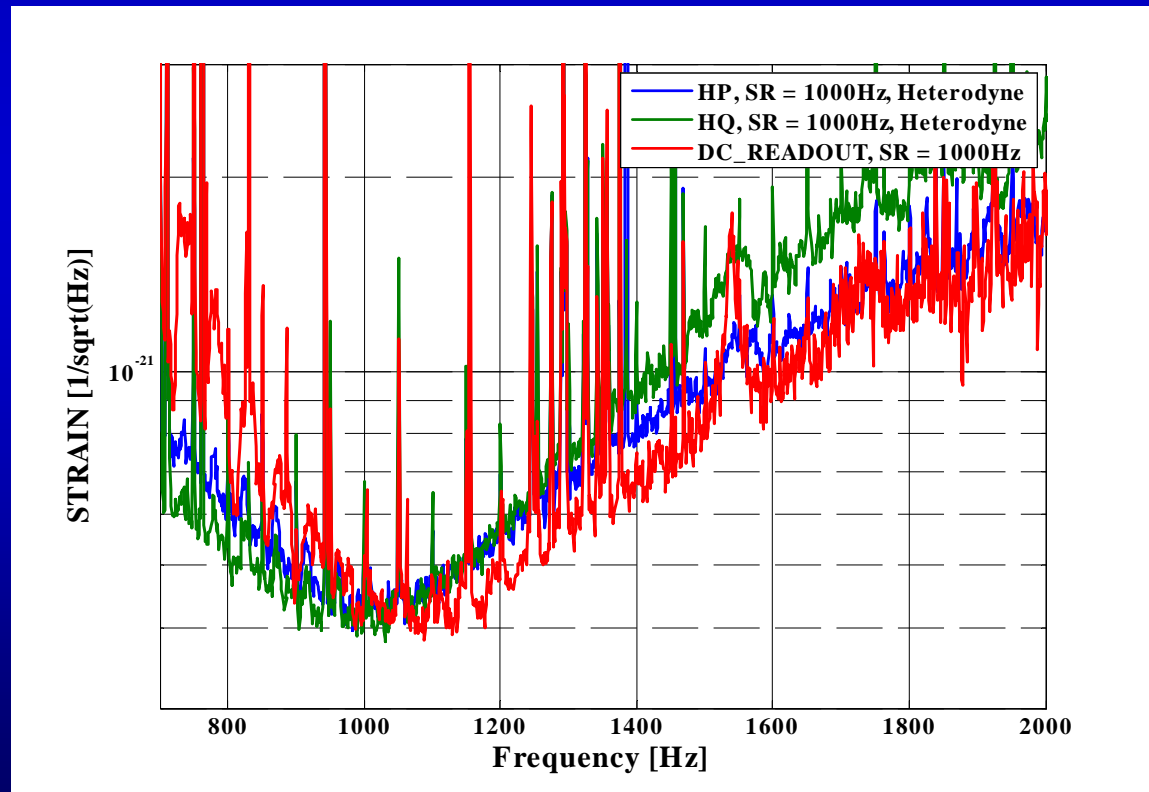



What might be gained from DC-readout

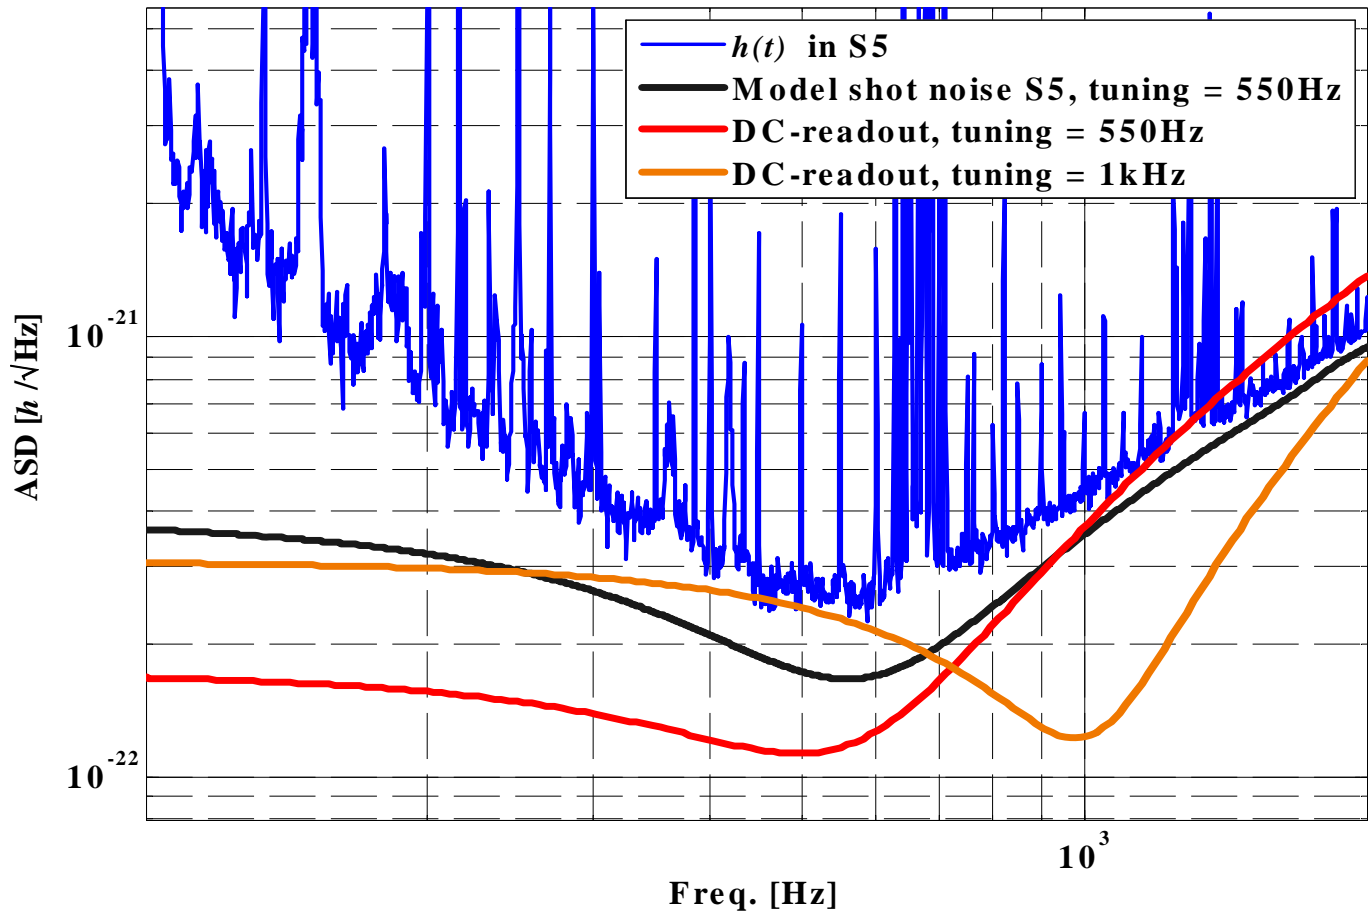



- **Improving sensitivity & detector stability:**
 - Implement ESD-Autoalignment
 - Reduce scattered light (larger viewports in endstations)
 - Increase circulating light power
 - Tuning flexibility
 - DC-readout scheme

- **Datataking in 2008 to cover the period when LIGO and Virgo are going to upgrade.**



Combination of tuned SR and squeezed – An option for GEO HF?




- Squeezed light is available for injection

“Coherent Control of Vacuum Squeezing in the Gravitational-Wave Detection Band”, Vahlbruch et al, PRL 97, 011101 (2006)


- Tuned Signal-Recycling operation was demonstrated

„Demonstration and comparison of tuned and detuned Signal-Recycling in a large scale gravitational wave detector“, S Hild et al, CQG. 24 No 6, 1513-1523.

⇒ No need for long filter cavity !

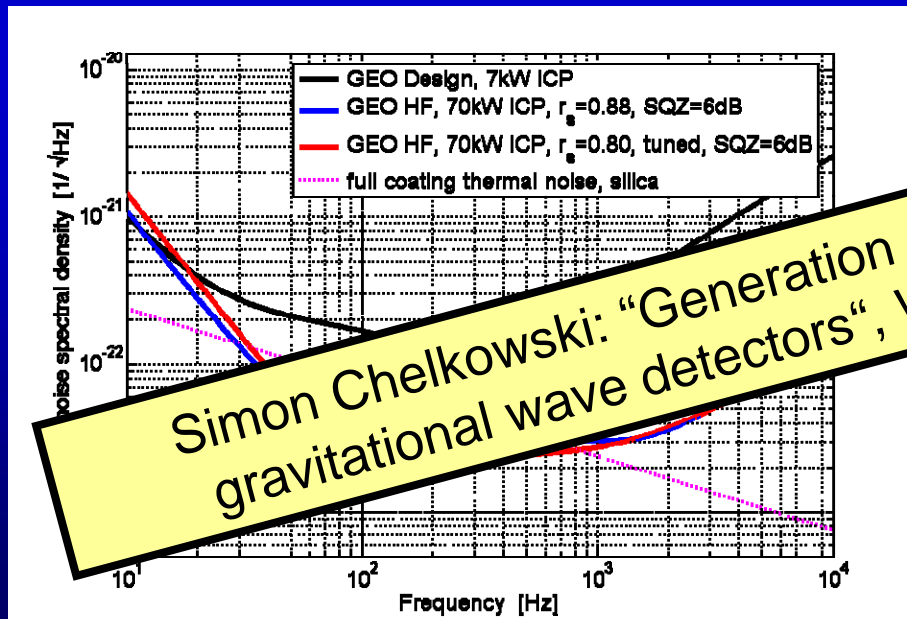








Simon Chelkowski: “Generation of squeezed states for gravitational wave detectors”, Wednesday 10:50 AM

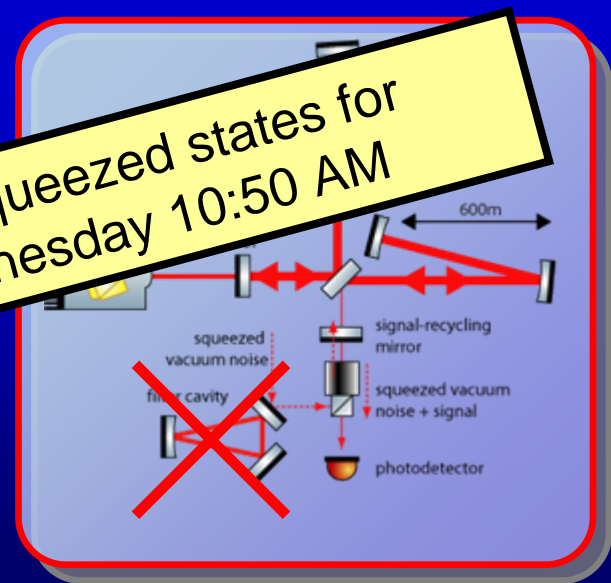

Plans of the GEO collaboration



- operate GEO600 / GEO-HF as LSC detector
- LSC data analysis
- laser and suspensions for AdvLIGO (laser for Enh. LIGO)
- contribute to AdvVIRGO design
- R&D and design towards third generation detectors

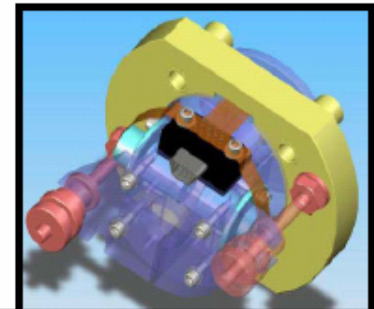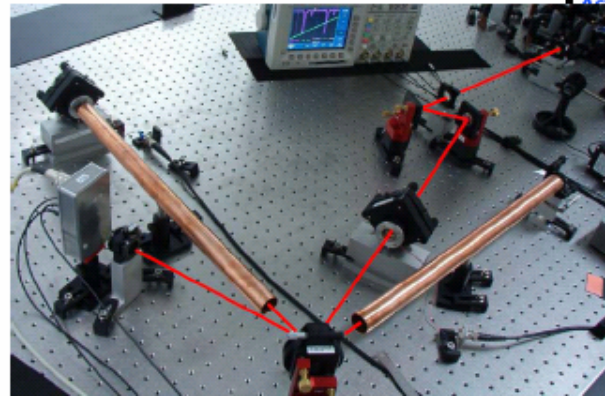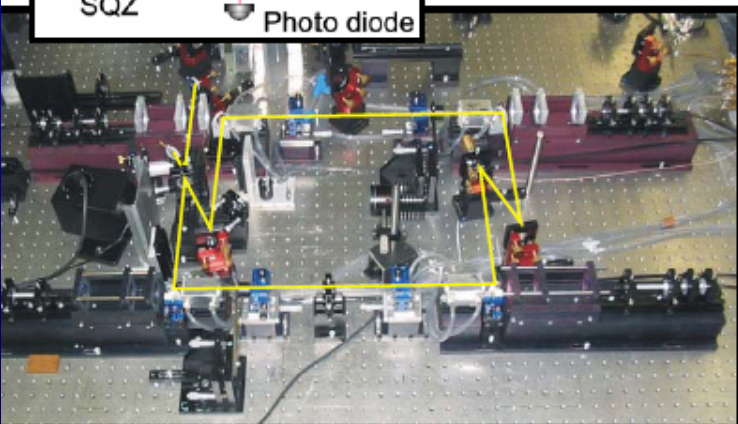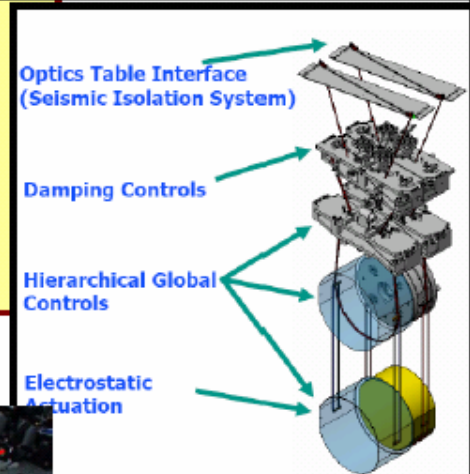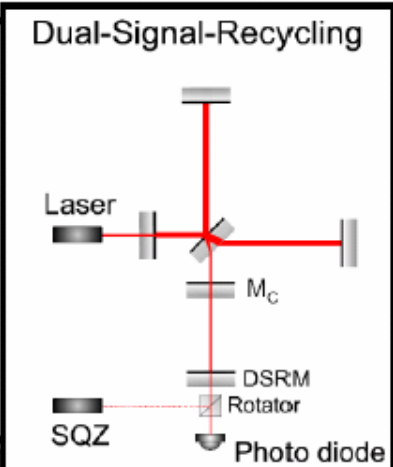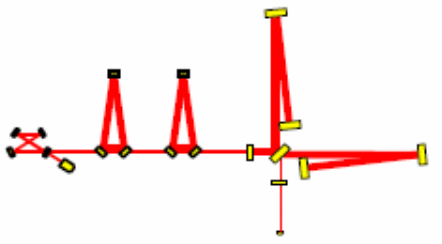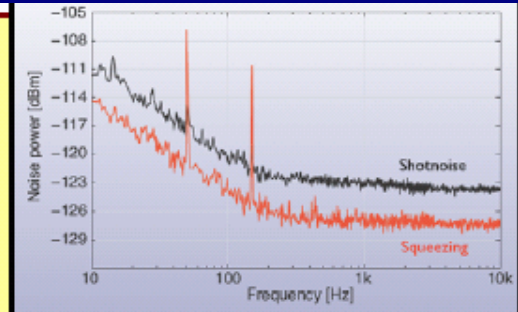



END