

8

7

6

5

4

3

2


1

NOTES CONTINUED:

5. SCRIBE, ENGRAVE, LASER MARK OR MECHANICALLY STAMP (NO DYES OR INKS) A UNIQUE THREE DIGIT SERIAL NUMBER & REVISION NUMBER ON EACH PART. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. BAG AND TAG PARTS WITH THEIR DRAWING PART NUMBER, REVISION, VARIANT OR "TYPE" (IF APPLICABLE), AND QUANTITY. IF PARTS ARE TOO SMALL TO SCRIBE, BAGGING AND TAGGING ALONE IS SUFFICIENT.
 EXAMPLE (PART): 001-v1
 EXAMPLE (TAG): DXXXXXX-VY, TYPE-XX, QTY: TBD

6. ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH LIGO SPECIFICATION E0900364.

REV.	DATE	DCN #	DRAWING TREE #
v1	20 JUL 2011	E1100335	-
v2	17 AUG 2011	E1100355	-
-	-	-	-

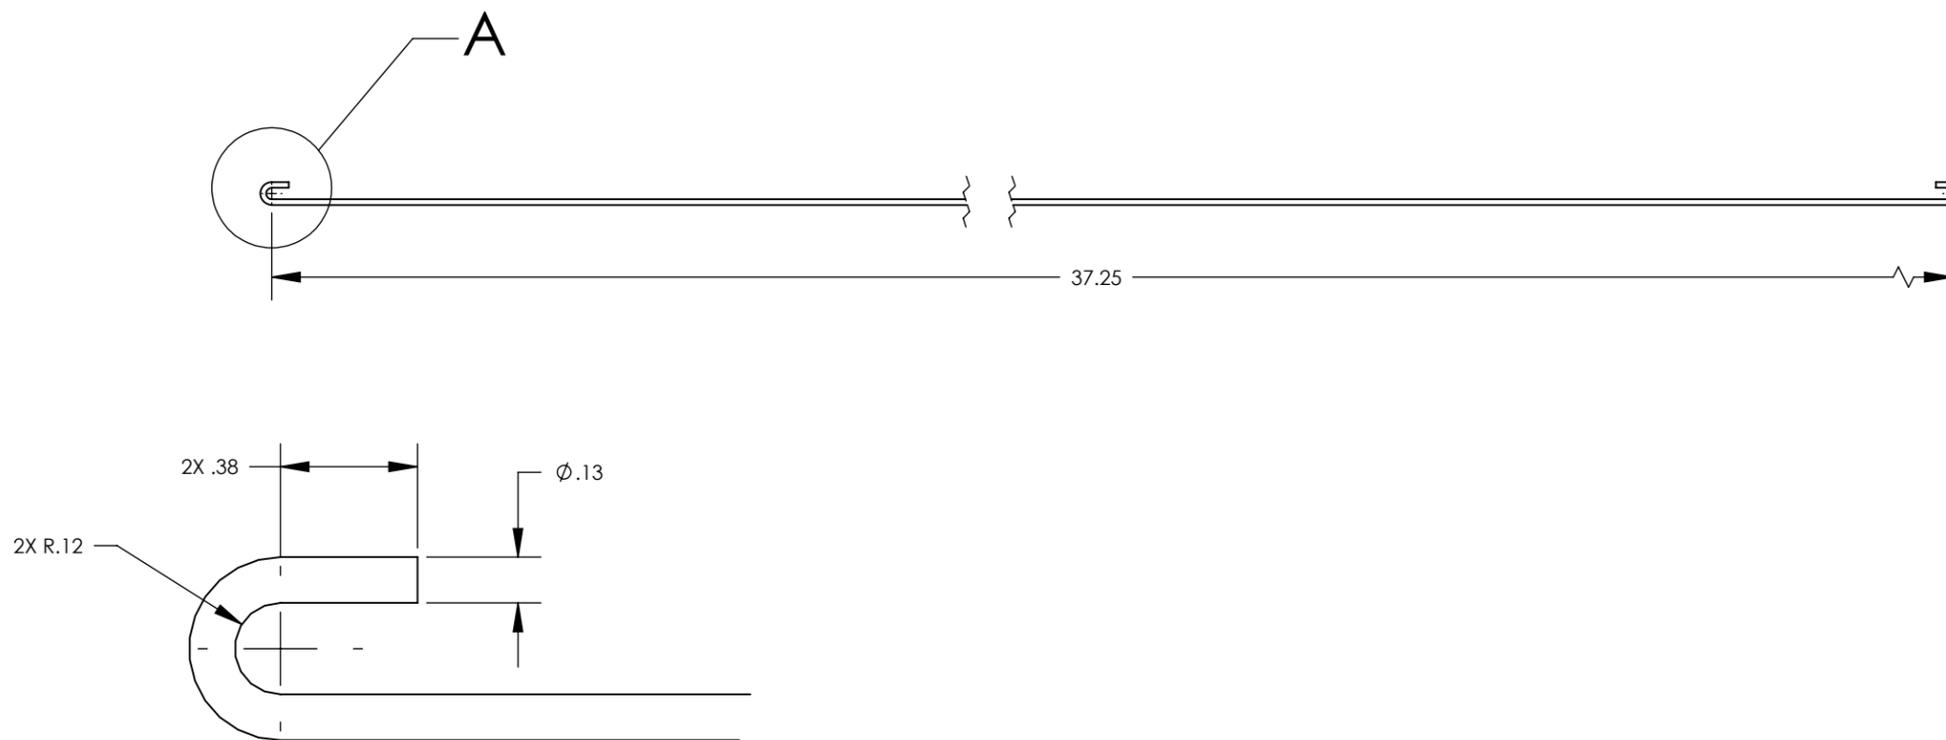

DETAIL A
SCALE 2 : 1

D1101443 WIRE, LIFTING, ARM CAVITY BAFFLE, PART PDM REV: X-003, DRAWING PDM REV: X-002

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)				LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY		PART NAME	
DIMENSIONS ARE IN		1. INTERPRET DRAWING PER ASME Y14.5-1994. 2. REMOVE ALL SHARP EDGES, .005-.015, FOR MACHINED PARTS. ROUND ALL EDGES APPROXIMATELY R.02 FOR SHEET METAL PARTS. 3. DO NOT SCALE FROM DRAWING. 4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.		ADVANCED LIGO		WIRE, LIFTING, ARM CAVITY BAFFLE	
TOLERANCES: .XX ± .03 .XXX ± .010		MATERIAL 304, 316 OR 302 SSSL		SUB-SYSTEM AOS		DESIGNER MRUIZ 20 JUL 2011	
ANGULAR ± .5°		FINISH 63 μinch		NEXT ASSY D1002812		SIZE DWG. NO. B D1101443	
						REV. v2	
						SCALE: 1:1 PROJECTION: SHEET 1 OF 1	

8

7

6

5

4

3

2

1