

D1201324 Upper insulation narrow, Rotate dual suspended seismometer short osc platform iso, PART PDM REV: X-000, DRAWING PDM REV:


8 7 6 5 4 3 2 1

NOTES CONTINUED:  
 ⑤ SCRIBE, ENGRAVE (A VIBRATORY TOOL MAY BE USED), LASER MARK OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER, REVISION (AND VARIANT OR "TYPE" IF APPLICABLE) ON NOTED SURFACE OF PART FOLLOWED ON THE NEXT LINE WITH A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE MINIMUM 0.12" HIGH CHARACTERS, UNLESS THE SIZE OF THE PART DICTATES SMALLER CHARACTERS. EXAMPLE: DXXXXXX-VY, TYPE-XX, S/N XXX

REV.	DATE	DCN #	DRAWING TREE #
v1	28 SEP 2012	E1200841	-
-	-	-	-
-	-	-	-

D  
C  
B  
A

D  
C  
B  
A

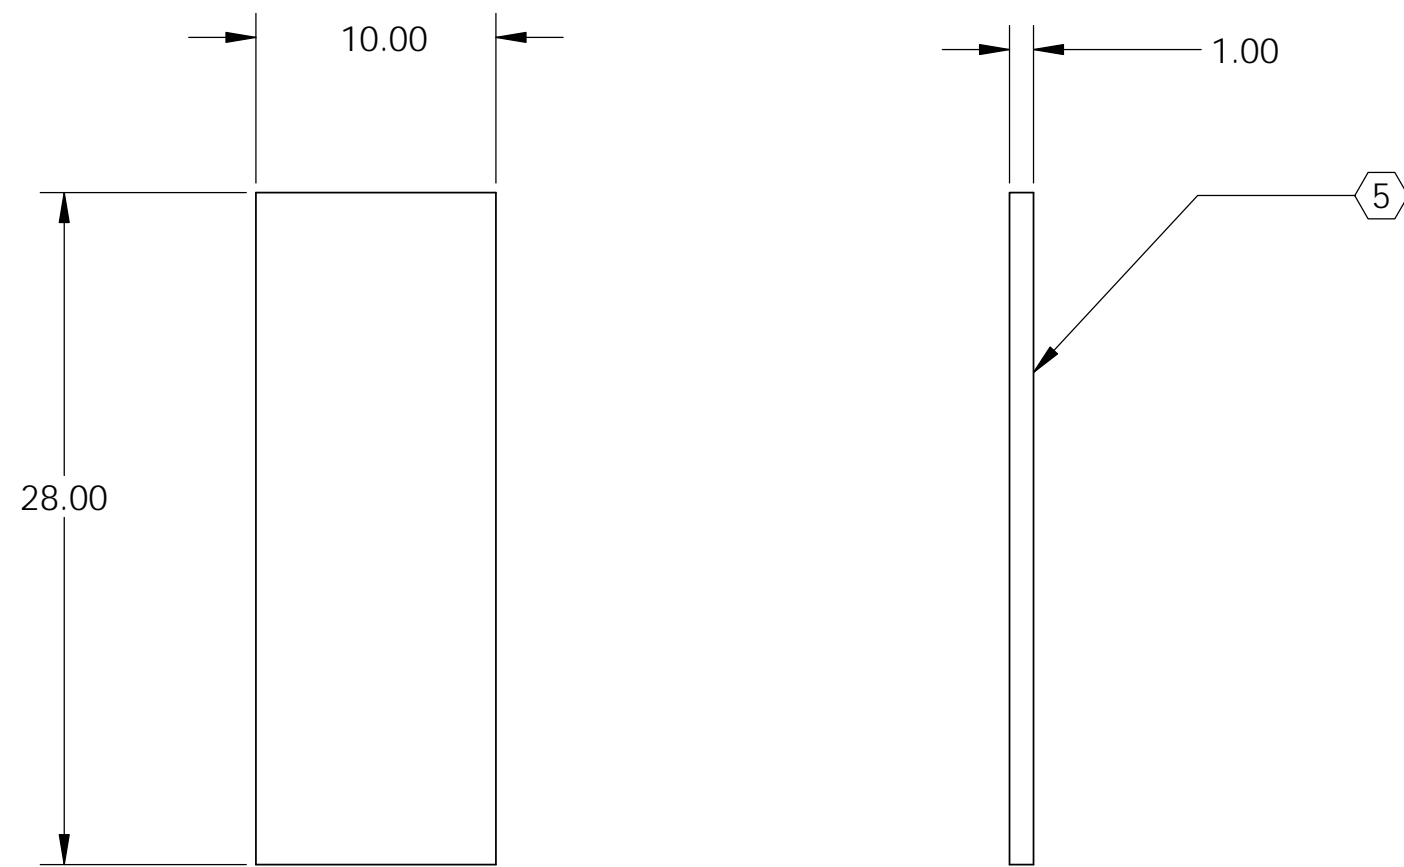

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)				LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY		PART NAME				
DIMENSIONS ARE IN INCHES		1. INTERPRET DRAWING PER ASME Y14.5-1994. 2. REMOVE ALL SHARP EDGES, R.02 MIN. 3. DO NOT SCALE FROM DRAWING. 4. APPROXIMATE WEIGHT = 0.26 LB.		ADVANCED LIGO		SUB-SYSTEM		Upper insulation narrow		REV.
TOLERANCES: .XX ± 0.015 .XXX ± 0.005		MATERIAL Polystyrene Foam		FINISH 63 μinch		NEXT ASSY D1201326		DESIGNER P. KNOEHE	DATE 21 SEP 2012	SIZE B
ANGULAR ± 0.5°						CHECKER M. MATICHARD		DATE 28 SEP 2012	DWG. NO. D1201324	
						APPROVAL K. MASON		DATE 28 SEP 2012	SHEET 1 OF 1	
						SCALE: 1:8		PROJECTION:		

8 7 6 5 4 3 2 1