


NOTES: (UNLESS OTHERWISE SPECIFIED)

- MINIMUM LENGTH OF CABLE 7 IN.,
MAXIMUM LENGTH OF CABLE 12 IN

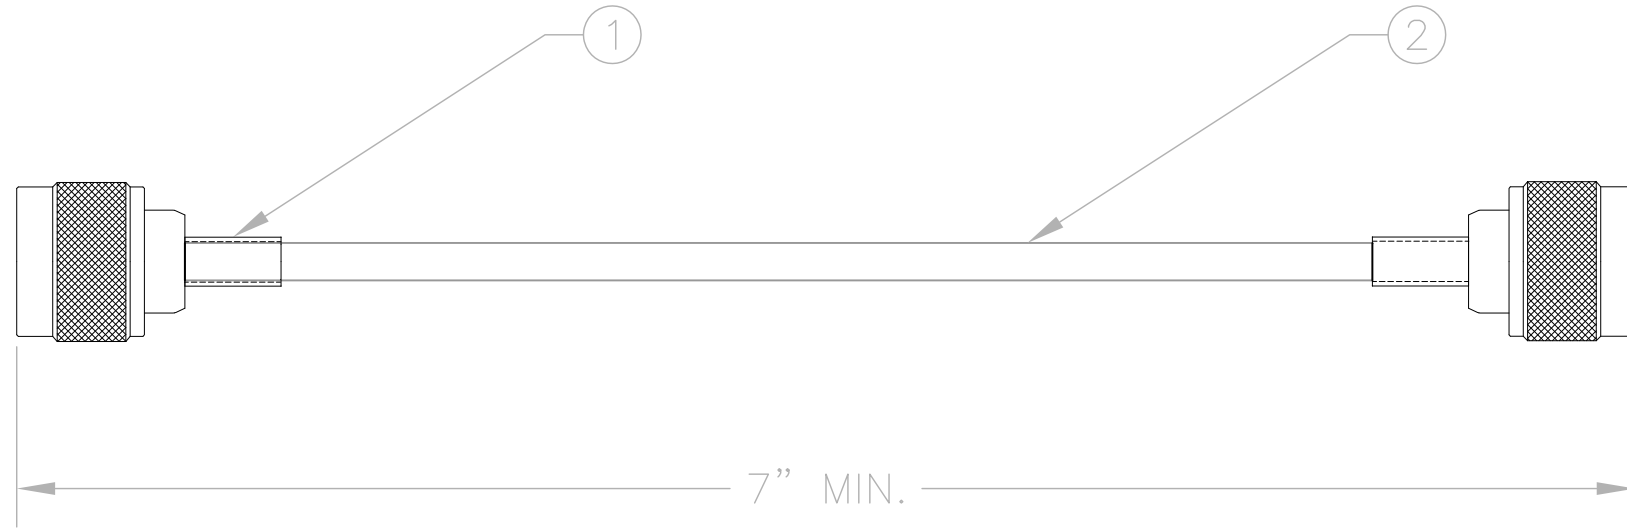

REV.	DATE	DCN #	DRAWING TREE #

ITEM NO.	REQ.	SPARE	TOT.	PART NUMBER	DESCRIPTION	SUPPLIER
1	1	0	1	LMR-195-FR	FLEXIBLE LOW LOSS COAX CABLE	ALLIED WIRE & CABLE
1	2	0	2	172100	TYPE N STRAIGHT CRIMP PLUG FOR RG-58, LMR-195, 50 OHM	AMPHENOL CONNEX

PARTS LIST			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DATE	NAME
TOLERANCES: .XX ±: 0.010 .XXX ±: 0.005 ANGULAR: ±		11/29/12	P. KING
MATERIAL		COMMENTS:	
FINISH SEE NOTES		COMMENTS:	
DRAWN		CALIFORNIA INSTITUTE OF TECHNOLOGY	
CHECKED		LIGO MASSACHUSETTS INSTITUTE OF TECHNOLOGY	
		SYSTEM aLIGO	
		SUB-SYSTEM PRE-STABILISED LASER (PSL)	
		NEXT ASSY aLIGO PSL VCO AMPLIFIER	
		PART NAME aLIGO PSL VCO AMPLIFIER TYPE N CABLE	
		SIZE/DWG. NO.	REV
		B D1201427	v1
		SCALE: N/A	SHEET 1 OF 1